ENGINEERING NEWS-RECORD

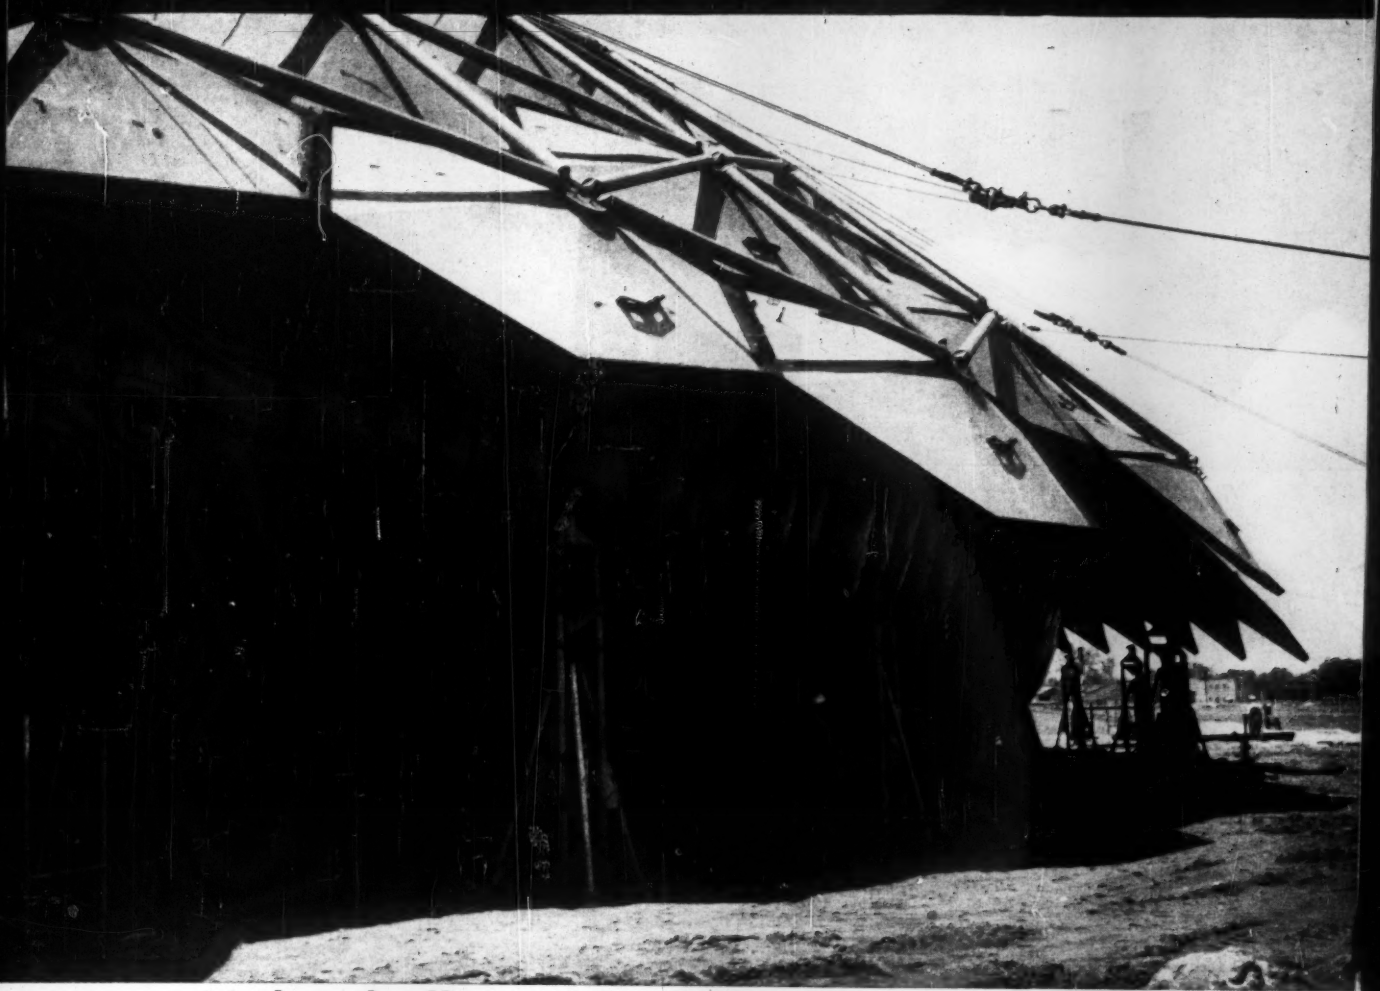

Nylon balloon lifts big steel dome p.28

A McGRAW-HILL PUBL

STEVENS RICE GS
UNIV MICROFILMS INC EDI
313 N FIRST ST
ANN ARBOR MICH

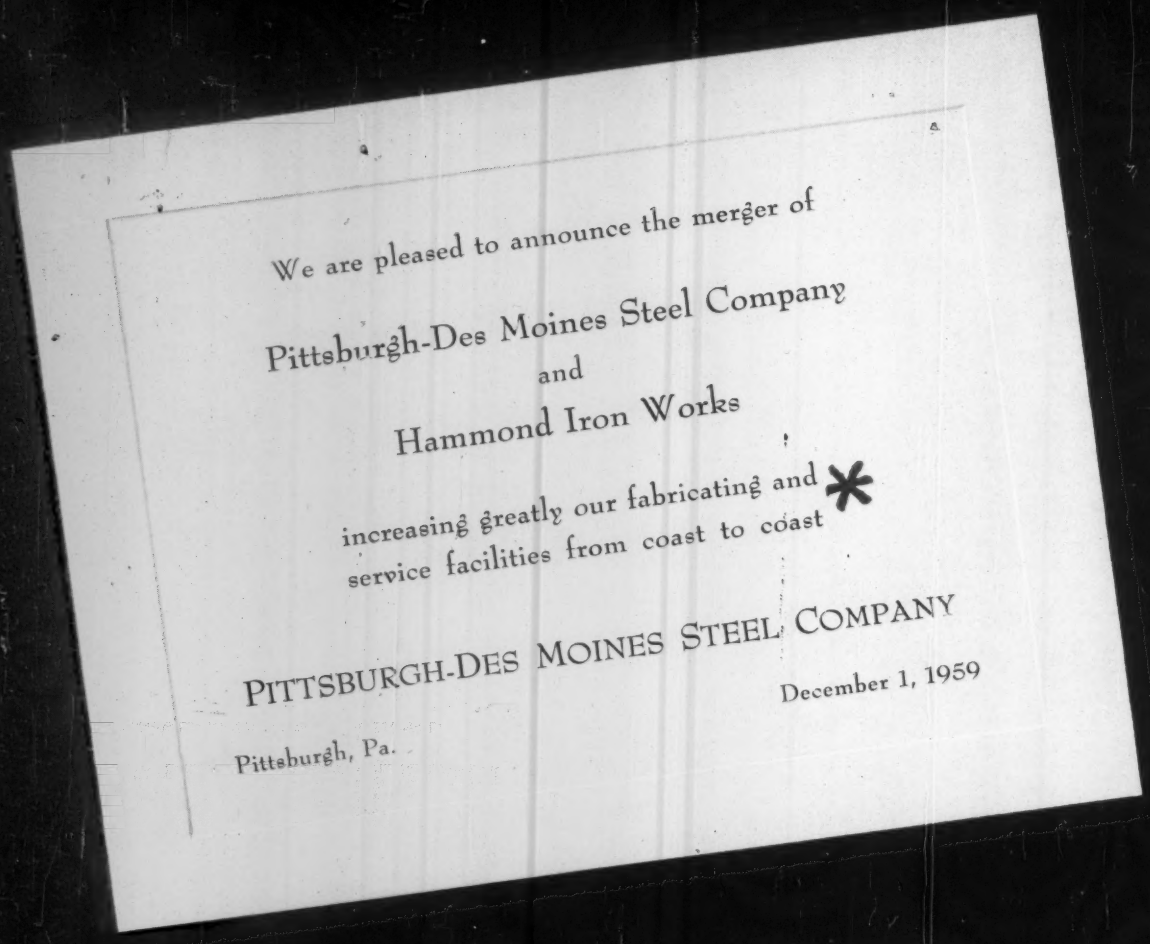
We are pleased to announce the merger of
Pittsburgh-Des Moines Steel Company
and
Hammond Iron Works
increasing greatly our fabricating and service facilities from coast to coast *
PITTSBURGH-DES MOINES STEEL COMPANY
December 1, 1959
Pittsburgh, Pa.

*NOW 12 PLANTS TO SERVE YOU!

PDM STEEL COMPANY

Unparalleled facilities to meet your requirements . . . plants in Pennsylvania, Maryland, Alabama, Iowa, Utah, California . . . sales offices crisscrossing the country . . . the combined experience of two leading steel fabricating companies concentrated into a single strongly-integrated organization of great size and scope. Expect the best in your past associations with PDM and Hammond to be *bettered* today by today's Pittsburgh-Des Moines. Let us prove it in service, consultations and quotations. *Write—wire—phone for a get-together.*

Pittsburgh-Des Moines Steel Company

Plants at PITTSBURGH, WARREN, BRISTOL, PA. • BALTIMORE • BIRMINGHAM • DES MOINES
PROVO, UTAH • CASPER, WYO. • SANTA CLARA, FRESNO, STOCKTON, CALIF.

Sales Offices:

PITTSBURGH (25)	3414 Neville Island
BALTIMORE (26)	Curtis Bay Station
NEW YORK (17)	Suite 2716, 200 E. 42d St.
CHICAGO (3)	618 First National Bank Bldg.
ATLANTA (5)	361 E. Paces Ferry Rd., N.E.
JACKSONVILLE (7)	4066 Ferrarra Road
DES MOINES (8)	915 Tuttle Street
DENVER (2)	323 Railway Exchange Bldg.
DALLAS (1)	Suite 1719, Southland Center
SEATTLE (1)	Suite 322, 500 Wall St.
SANTA CLARA, CALIF.	619 Alviso Road
EL MONTE, CALIF.	P.O. Box 2012

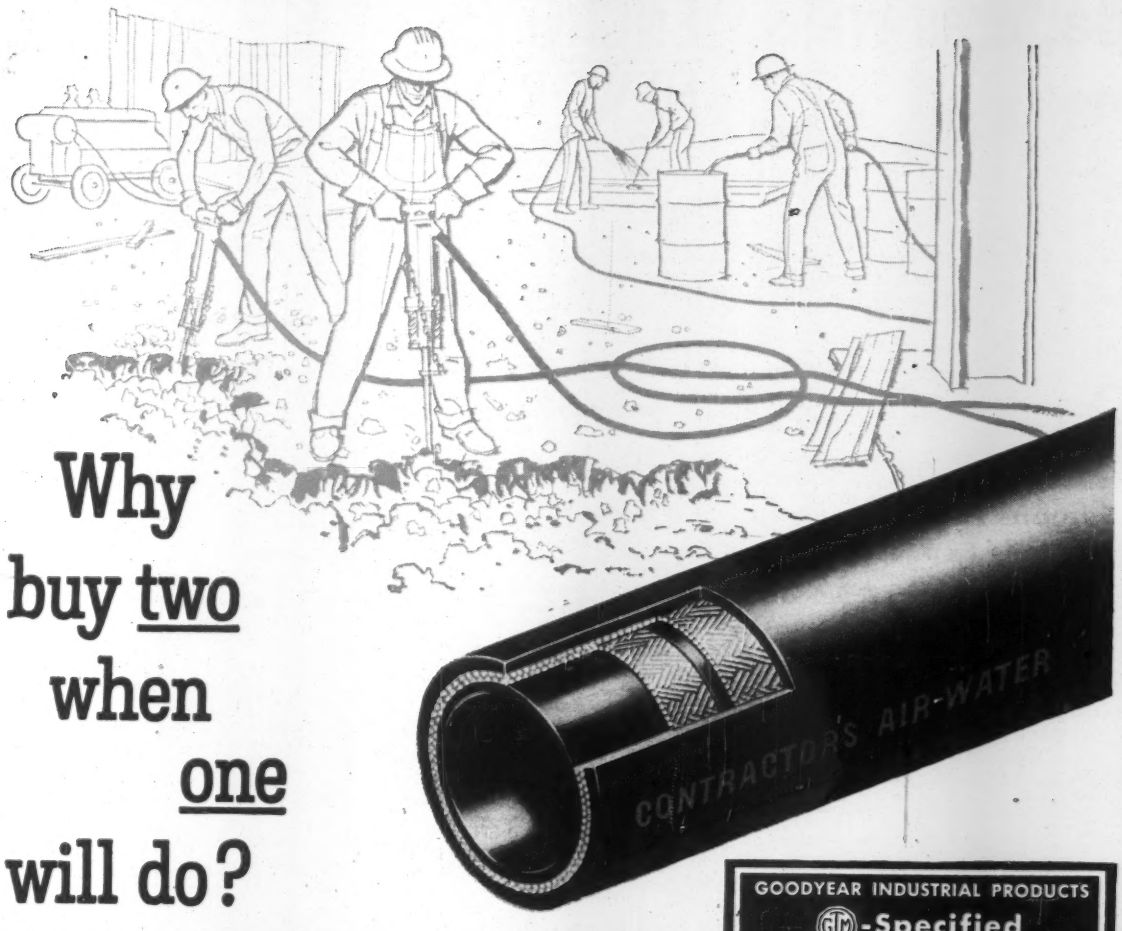

Why buy two when one will do?

Here's one hose that can handle practically every air or water assignment on any kind of construction job.

It was designed by the G.T.M. – Goodyear Technical Man – and his colleagues for air pressures up to 200 psi. Or it's an ideal water hose for filling, supplying or wash-down service.

Buy it in continuous lengths up to 400 feet (in the 1-inch or smaller sizes) and you can cut off the lengths you need – as you need them. Every piece will give you a rayon-cord-reinforced ruggedness that means extra-long, trouble-free service on even the toughest jobs.

So why buy both air *and* water hose when this one handles both so capably – and economically. Just contact your Goodyear Distributor – or write Goodyear, Industrial Products Division, Akron 16, Ohio.

IT'S SMART TO DO BUSINESS *with your Goodyear Distributor. He can give you fast, dependable service on Hose, V-Belts, Flat Belts and many other industrial rubber and nonrubber supplies. Look for him in the Yellow Pages under "Rubber Goods" or "Rubber Products."*

GOODYEAR INDUSTRIAL PRODUCTS

GTM-Specified

Contractor's Air-Water Hose for Construction Work

- **A** Rugged cover that's both abrasion- and sun-resisting – continuously print-branded for easy identification
- **B** Extra-tough braids of high-tensile rayon cord to handle pressures, resist crushing or kinking
- **C** Special nonporous tube resists alkali or slightly acid water

the big name in hose is

GOODYEAR

THE GREATEST NAME IN RUBBER

Battered Walls

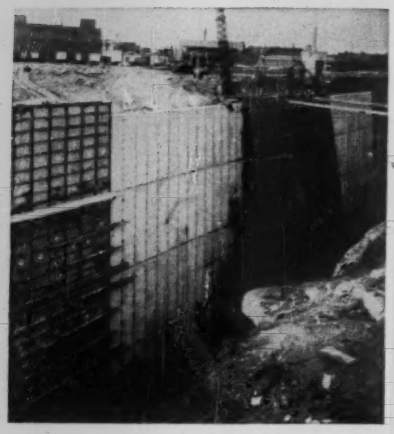

Symons Forms on St. Louis Expressway

. . . Form Double Battered Walls 12" at Top, 3' at Base

On the downtown phase of the St. Louis Mark Twain Expressway, contractor R. B. Potashnick & J. S. Alberici Construction Company used 8,000 sq. ft. of Wood-Ply and 20,000 sq. ft. of Symons Steel-Ply Forms.

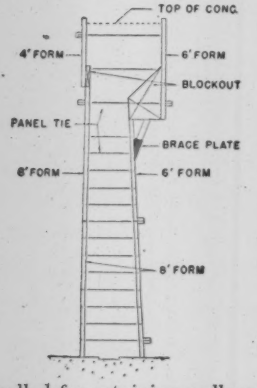

Job called for retaining walls, many of them double battered so that forms were angled to give 12" top thickness and up to 3' thickness at base. Heights varied from 4' to 34'. In addition, the forms were used to pour footings, abutments, piers and beams. Contractor obtained 30 re-uses.

Symons Forms may be rented with purchase option. Additional information on how to use Symons Forms for *battered walls* sent on request.

Symons

SYMONS CLAMP & MFG. CO.

4265 Diversey Ave., Dept. A-O Chicago 39, Ill.

MORE **SAVINGS** FROM **SYMONS**

ENGINEERING NEWS-RECORD

EIGHTY-SIXTH YEAR OF PUBLICATION

ABP ABC MEMBER

Editorial Offices, 330 W. 42nd St., New York 36, N. Y.
New York- LOngacre 4-3000; Chicago - MOhawk 4-5800; San Francisco - DOuglas 2-4600
Washington - REpublic 7-6630

Editor, Waldo G. Bowman

Senior Staff Editor, **Arthur J. Fox, Jr.**

Senior Editor, **Frederick S. Merritt**

Highways, Airports—Transportation
Leo J. Ritter, Jr., Edward M. Young, Jr., Joseph F. Wilkinson

Buildings, Bridges—Structures
David B. Hill, Marianne Stern Friedland, C. W. Griffin, Jr.

Rivers Sanitation—Water Resources
James B. Sullivan

Finance, Labor—Management
Robert J. Stinson, Charles J. Harding

Regional Editors
J. Roland Carr; *Chicago, 520 N. Michigan Ave.*
Martha Alexander, *Staff Assistant*
Lauress L. Wise, *San Francisco, 68 Post St.*

Copy—Production
Barbara Lamb, Irwin Landau, William W. Jacobus, Jr., Nancy Parkes, John C. Greenough

Presentation
Harry W. Jensen, Robert G. Young

Statistics, Prices, Costs—Business News
Elsie Eaves, *Manager*
Julia Mahoney, *Construction Reports*
Mildred Wetzel, Marian Sciorra, Marie Moravsik, Elaine Chomyak, Elizabeth Werra, Eleanor Queret
James Webber, Ruth Carlson, *Economics*
William P. Larkin, *Prices, Wages, Indexes*
Evelyn Huber, Charlotte Foster, *Statistics*
Bertha Herrmann, *Unit Prices*

Editorial Research and Indexing
Eva Gierat, Rene Hay, Leah Shanks, Charlotte Knight, Jane Jacobson

Consulting Editors: **Van Tuyl Boughton, Nathan A. Bowers**

Advertising Sales Manager: **Donald S. Robertson**

Circulation Manager: **Edward F. Bressler**

Washington Bureau, National Press Bldg., Washington 4, D. C., George B. Bryant, Jr., Chief, Alan Adams, Glen Bayless, Roy Calvin, Ernest Conine, Anthony DeLeonardis, John Donaldson, Jay Flocken, Boyd France, Donald Loomis, Gladys Montgomery, Arthur Moore, Seth Payne, Dean Reed, Morton Reichek, Caroline Robertson, Vincent Smith.

Domestic News Bureaus: Atlanta—801 Rhodes-Haverty Bldg., B. E. Barnes, Chief, Frances Ridgway; **Chicago**—520 N. Michigan Ave., Stewart Ramsey, Chief, Elizabeth Wilson, Bruce Cross; **Cleveland**—55 Public Square, Arthur Zimmerman, Chief, Violet Forsha; **Dallas**—901 Vaughn Bldg., Marvin Reid, Chief, Lorraine Smith; **Detroit**—856 Penobscot Bldg., Donald MacDonald, Chief, Sally Ayling; **Los Angeles**—1125 W. 6th St., Kemp Anderson, Jr., Chief, Michael Murphy, Jack Meyer, Marvin Petal; **San Francisco**—68 Post St., Jenness Keene, Chief, Donald Winston; **Seattle**—6040 Fifth Ave., N.E., Ray Bloomberg.

Foreign News Bureaus: London—John Shinn; **Paris**—Robert Farrell; **Mexico City**—Peter Weaver; **Bonn**—Morrie Helitzer; **Beirut**—O. M. Marashian; **Tokyo**—Sol Sanders; **Caracas**—John Pearson; **Moscow**—Robert Gibson.

Correspondents: In 70 principal U. S. cities and 70 cities throughout the world.

Director of News Bureaus: John Wilhelm; Managing Editor, Margaret Ralston.

McGraw-Hill Economics Department: Dexter M. Keezer, Director; W. H. Chartener.

Publisher, Robert F. Boger

ENGINEERING NEWS-RECORD, Vol. 164, No. 1, JANUARY 7, 1960

Published weekly by McGraw-Hill Publishing Company, James H. McGraw (1860-1948), Founder. Publication Office, 99-129 North Broadway, Albany 1, N. Y. See panel below for directions regarding subscriptions or change in address. **Executive, Editorial, Advertising and Circulation Offices, McGraw-Hill Building, 330 W. 42nd St., New York 36, N. Y.** Donald C. McGraw, President; Joseph A. Gerardi, Executive Vice President; L. Keith Goodrich, Vice President and Treasurer; John J. Cooke, Secretary; Nelson Bond, President, Publications Division; Shelton Fisher, Senior Vice President; John R. Callaham, Vice President and Editorial Director; Joseph H. Allen, Vice President and Director of Advertising Sales; A. R. Venezian, Vice President and Circulation Coordinator. **Subscriptions are solicited only from persons with identifiable commercial or professional interests in construction and building. Position and company connection must be indicated on subscription orders.** United States subscription rate for individuals in the field of this publication $6.00 per year, single copies 50 cents; foreign $20 per year, payable in advance. Second-Class mail privileges authorized at Albany, New York. Printed in U.S.A. Title registered in U.S. Patent Office.

©Copyright 1960 McGraw-Hill Publishing Co., Inc. All Rights Reserved.

UNCONDITIONAL GUARANTEE: We agree, upon request to our New York office, direct from paid-up subscribers, to cancel any subscription if ENGINEERING NEWS-RECORD's editorial service is unsatisfactory, and will refund the proportionate subscription price of any unmailed copies.

SUBSCRIPTIONS: Send subscription correspondence and change of address to Subscription Manager, ENGINEERING NEWS-RECORD, 330 W. 42nd St., New York 36, N. Y. Subscribers should notify publisher *promptly of any change of address, giving old as well as new address, and including postal zone number,* if any. If possible enclose an address label from a recent issue of the magazine. Please allow one month for change to become effective.

Postmaster: Please send Form 3579 to Engineering News-Record, 330 W. 42nd St., New York 36, N. Y.

NORTHWEST

you can say... "THEY'RE ALWAYS READY TO GO!"

Crane and Shovel production is not measured by the speed of a hoist rope or the number of revolutions per minute. Production is the result of maintained steady month in and month out operation. *Northwests get the job done*—not for a day or a shift, but month in and month out, year in and year out.

Northwest construction insures that marvelous advantage of always being ready to go. Their purpose is to make money for you and they have proved their ability to earn a profit on jobs the world over.

If you are a Northwest owner you can say, *"It's always ready to go"*.

Operators and owners everywhere tell us so!

E-80-26-LC

CRANES
SHOVELS
DRAGLINES
PULLSHOVELS
TRUCK CRANES

NORTHWEST

NORTHWEST ENGINEERING COMPANY
1502 Field Building • 135 South LaSalle Street • Chicago 3, Illinois

"FOR PRECISION DRILLING, NO LOST HOLES, WE RELY ON TIMKEN® CARBIDE INSERT BITS"

Special report from Rock of Ages

LOCATION: BARRE, VT.

Operating conditions: dimensional granite quarry

At the world famous Rock of Ages quarry, precision drilling of costly monumental granite is vital. A lost hole could ruin an entire block. "That's why", says Mr. J. Wendell Smith, Rock of Ages Corp. Vice President in Charge of Quarries, "we use Timken® carbide insert bits. They're perfect for our line drilling. We get clean cuts—no lost holes. And with over 50 drills operating, use of Timken carbide insert bits is an important savings factor in our cost control program."

Which Timken bit should you use?

You get greatest economy in hard, abrasive ground with the Timken carbide insert bit. In softer ground, use the Timken all steel multi-use bit. They're interchangeable in the same thread series; you can switch bits when the ground changes. Bit bodies are made of Timken electric furnace fine alloy steel. Let us help you select the right Timken bit for your job. The Timken Roller Bearing Company, Rock Bit Division, Canton 6, Ohio. Cable: "TIMROSCO". *Makers of Tapered Roller Bearings, Fine Alloy Steels and Removable Rock Bits.*

TIMKEN®

removable rock bits

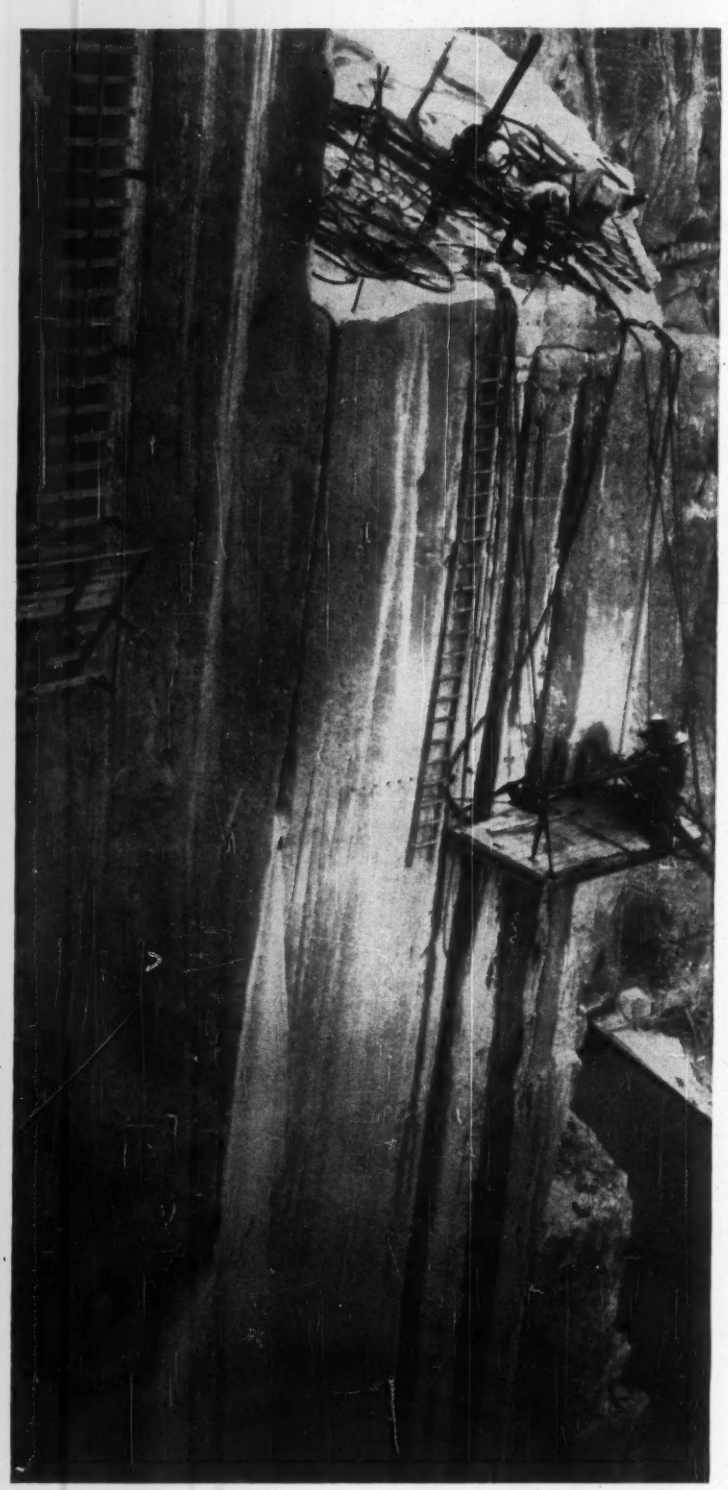

Independent Tests Show:

Flow characteristics of AMVIT clay pipe permit efficient, lowest cost-in-place sewer design

There is no difference in value of Kutter's "n" between different types of pipe materials

There have been many claims and counter-claims dealing with the "n" factor in the Manning approximation of the Kutter formula relating to the flow-coefficient of friction of various types of piping materials.

For many years, sewer designers have used the "n" factor of .013 in the design of sanitary sewer systems involving vitrified clay pipe. Recently, the manufacturers of substitute non-clay materials have claimed that the "n" factor for their product is less than .013, usually claiming it is .010.

This supposed difference in "n" factor has been used in the promotion of these substitute materials on the basis that, since their product has a supposedly lower "n" factor, designers must use a different design criteria for clay pipe. *This is only sales promotion talk.*

Studies at the University of Iowa and at Ohio State University have proven that there is essentially *NO* difference in the value of Kutter's "n" between different types of pipe materials regardless of pipe lengths, type of joints or any other consideration.

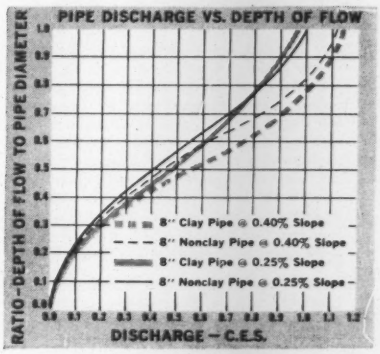
PIPE DISCHARGE VS. DEPTH OF FLOW
RATIO – DEPTH OF FLOW TO PIPE DIAMETER
8" Clay Pipe @ 0.40% Slope
8" Nonclay Pipe @ 0.40% Slope
8" Clay Pipe @ 0.25% Slope
8" Nonclay Pipe @ 0.25% Slope
DISCHARGE – C.F.S.

This graph shows discharge versus depth of flow.

In normal service a slime coating will be built up on the interior surface of the pipe. Therefore, the friction factor depends upon the relative smoothness of the slime surface and not upon the pipe material itself. Clay pipe is the only pipe material that will resist the corrosive action of the acid laden slime.

Don't be misled by exaggerated claims. For more information on this vital subject, or for complete data on how we can help you cut sewer project costs, write or call American Vitrified Products Company, National City Bank Building, Cleveland, Ohio, or our office nearest you.

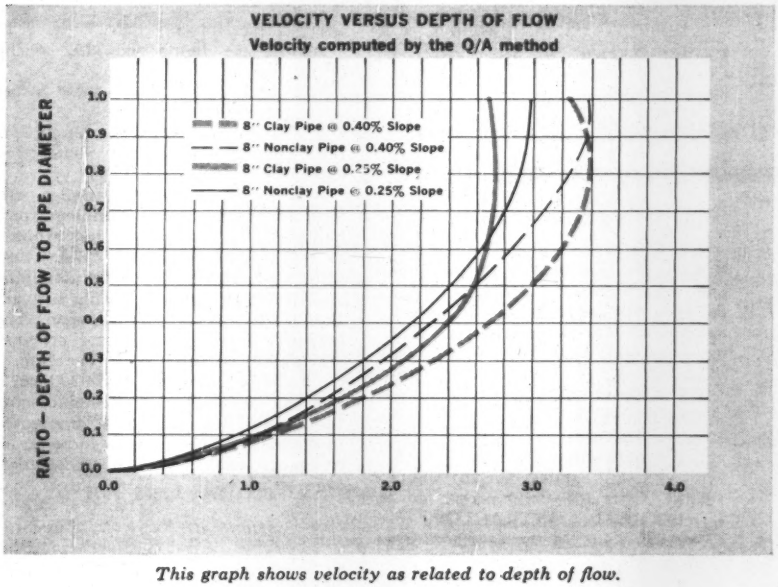

This graph shows velocity as related to depth of flow.

SINCE 1848

AMERICAN

American Vitrified Products Company

CLEVELAND OHIO

Plants Across the Nation . . . Brazil, Indiana • Chicago, Illinois • Cleveland, Ohio • Crawfordsville, Indiana • Detroit, Michigan • East Liverpool, Ohio • Grand Ledge, Michigan Lisbon, Ohio • Los Angeles, California • Milwaukee, Wisconsin • South Bend, Indiana • St. Louis, Missouri • Whitehall, Illinois • Somerville, New Jersey (Completion early 1960).

assistant
ENGINEER
available

His name is STANPAT, and though he is not human he can swallow up your tedious re-drawing and re-lettering of standard and repetitive blueprint items for 24 hours a day if need be—without tiring. STANPAT is the remarkable tri-acetate sheet that is pre-printed with your specification and revision boxes, standard symbols, sub-assemblies, components and cross-sections . . . with adhesive front or back, waiting to be pressed into position in 15 seconds! Reproductions are unusually crisp and clear, guaranteed not to wrinkle, dry out or come off. STANPAT saves hundreds of hours in drafting time and money, allowing the engineer more time for creative work.

Already employed in numerous firms, STANPAT can go to work for you, too! Send us your drawing details now for quotation and free sample, no obligation.

so simple
1 to use:
PEEL the tri-acetate adhesive from its backing.
2 PLACE the tri-acetate in position on the tracing.
PRESS into position, will not wrinkle or come off. 3
STANPAT CO.
Whitestone 57, N. Y.
U. S. A.

STANPAT CO., Whitestone 57, N. Y., U. S. A.
Phone: FLushing 9-1693-1611

☐ Please quote on enclosed samples. Dept. 151
☐ Kindly send me STANPAT literature and samples.

Name_____
Title_____
Company_____
Address_____

Reader Comment

Consultants for Construction?

SIR—The article by Horace C. Crandall, "Construction Consultants Needed?" (ENR Nov. 12, p. 41) is highly pertinent—and timely. One of the most pertinent questions raised is "Are these structures being completed at the most reasonable cost and in the most expeditious manner?"

Specifications that stipulate a given performance requirement, at the same time spelling out how this performance shall be achieved, suggest a negative answer.

Mr. Crandall is correct in his analysis of the need for combined designer-constructor talents. One facet of the problem is materials of construction, in which connection I have observed several things consonant with his comments.

The practical materials engineer is neither an abstract theorizer nor a technician making and breaking test specimens. He is both of these, plus many other things. He is a specialist advisor who maintains a science and method which fills certain needs and answers certain questions facing practicing engineers and contractors.

The application of the theory and practice of materials technology requires a continuing familiarity with the subject to a degree which the busy engineer or construction official is not likely to maintain. The specialist who supplies this familiarity is the catalyst for this large and important facet of the picture so aptly drawn for us by Mr. Crandall.

JOHN C. SPRAGUE
Marietta, Ga.

▶ I say "Amen" to Mr. Horace C. Crandall's fine article. I believe my letter to you published in the April 23, 1959, issue, and excerpts from Mr. William Flesher's article in the July 2, 1959 issue, fit right in with Mr. Crandall's thinking.

G. G. SCHWESER
McDonnell Aircraft Corp.
St. Louis, Mo.

▶ With due respect to Mr. Crandall and recognizing the problem that he presents, his solution smacks unfortunately of "governmental-type" thinking—i.e. add more men and expend more money.

We contend that there are already available the highest-type of construction consultants extremely capable of performing the function that Mr. Crandall states is so directly needed. The title these people go by is: GENERAL CONTRACTOR.

We refer you to the excellent letter from Mr. H. C. Turner, Jr. (ENR Nov. 19, p. 19) wherein it is pointed out that the best interests of the owner are served through the judicious selection of an architect and a contractor to work as a construction team.

To Mr. Crandall and anyone else thinking along the lines of "Construction Consultants" we suggest that a sales effort in the direction of the "construction team" utilizing the skills and knowledge of qualified general contractors will produce an over-all much better result.

EDWIN B. LAW
President
Law-Pollitt Construction Co., Inc.
Wichita, Kan.

Sonic Boom Questions

SIR—Recent reports of extensive damage to the Terminal Building at Upland Airport, Ottawa, Ontario, attributed to a sonic boom, have some far-reaching implications (ENR Nov. 19, p. 50).

One would expect a building of this type to have been designed with adequate provision for wind pressures, in accordance with best current practice. This would be superior to most of the commercial construction that has been considered acceptable.

According to reports, the damage was widespread and unusual. If these assumptions and the facts as reported are correct, many existing structures are in jeopardy.

The questions that arise are.

- What are the ranges of intensities of forces generated by a sonic boom, and their duration?
- How does the horizontal and vertical distance from point of origin affect these forces?
- Does the shape and size of the plane have much effect?
- In what direction can these forces be expected to act?
- Will they affect our design criteria for roofs—in the South, for instance?
- Will they affect the design criteria for walls of low buildings, particularly in areas that are not exposed to high winds, or in built-up districts?

No time should be lost in obtaining such information, and making it available to the engineering profession. The potential hazards to life and property are almost beyond comprehension.

Possibly sonic booms introduce a new consideration in the design of conventional aircraft that may be exposed to the shocks. There seems to be an increase in the number of mechanical failures of late.

ARTHUR E. ROWE
Arthur E. Rowe & Associates
Cleveland, Ohio

Editors Note: ENR is preparing an article on the subject of sonic boom, what it is, what it does and how provision may be made for its effect on structures.

All structural steel in the Perry Street Wharf—shown here under construction—is protected above and below deck level with a Red Lead primer.

RED LEAD Protects New Docks and Warehouses at Port of New Orleans

The busy, historic Port of New Orleans is getting a new look. A bustling complex of eight new wharf and warehouse structures are now completed or under construction.

A Red Lead primer protects all internal and external steel members in these structures against atmospheric corrosion and high moisture conditions. In locations of severe exposure, two finish coats are applied over two primer coats of Red Lead. All interior structural steel gets two coats of Red Lead plus one finish coat.

Red Lead has proved so successful in combating all forms of rust and corrosion that you will find it on bridges, ships and virtually everywhere that steel is exposed to the weather. No other primer equals the low-cost protection given by Red Lead. If you have a problem, our Red Lead specialists will be glad to help you select the best formulation for maximum service and lowest cost. Write today. Lead Industries Association, 60 East 42nd Street, New York 17, N. Y. 1969

LOOK AHEAD WITH LEAD

PUT THE EARNING POWER OF A UNIT ON YOUR JOBS!

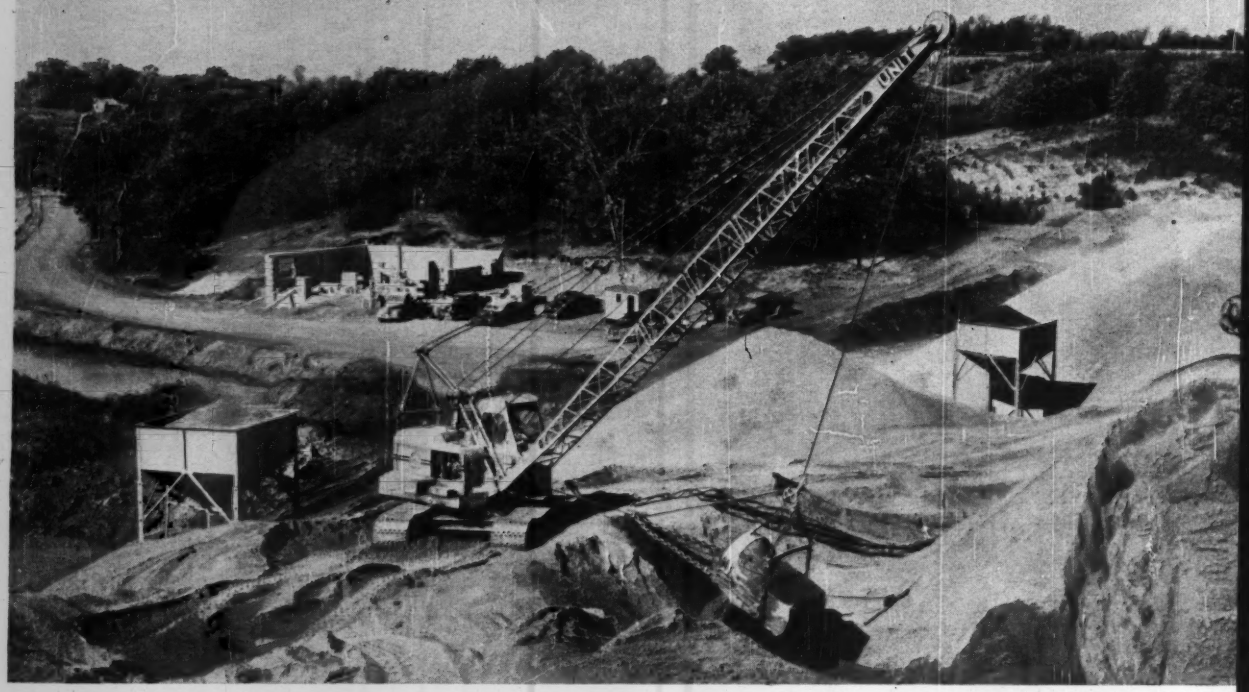

UNIT GIVES YOU THE WIDEST CHOICE OF CAPACITY, PRICE AND VERSATILITY TO MEET YOUR EXACT NEEDS

You can't do today's highly competitive jobs with obsolete equipment and stay in business. You need equipment that enables you to bid low enough to get the job—and efficient enough to turn your low bid into a profit.

The modern Unit line of excavators and cranes gives you bigger EARNING POWER because they are bigger producers on any job—faster cycling, easier operating—plus the built-in rugged dependability that keeps them on the job hour after hour, with negligible maintenance expense.

No other machines in their class perform like a UNIT, because none are built like a UNIT. No one else offers you a one-piece cast gear case with all gears, shafts and bearings operating in an oil bath; automatic traction brakes; straight-in-line engine torque converter drive; all disc type operating clutches; the liberal use of drop forged parts; heat treating on all essential components; full vision operator's cab — a combination of features you don't find even on the highest priced machines.

You'll find a UNIT is worth more when you buy it—and worth more when you sell or trade. Before you buy another excavator, compare UNIT—you'll be glad you did. Write for literature on the models shown or see your nearby UNIT distributor.

CRAWLER SHOVELS
5 CONVERTIBLE MODELS

A rugged line of power-packed machines, designed for today's competitive bidding. Fast operating, simple in design and fully convertible for maximum versatility.

Model	Shovel	Hoe	Dragline	Crane	Clamshell
513C	½ Yd.	½ Yd.	½ Yd.	5½ Ton	½ Yd.
614	½ Yd.	½ Yd.	½ Yd.	8 Ton*	½ Yd.
617	⅝ Yd.	⅝ Yd.	⅝ Yd.	10 Ton*	⅝ Yd.
1020	¾ Yd.	¾ Yd.	¾ Yd.	12½ Ton*	¾ Yd.
1220	¾ Yd.	¾ Yd.	¾ Yd.	16 Ton*	¾ Yd.

*Maximum Crane Capacity.

TRUCK CRANES
4 CONVERTIBLE MODELS

Select the size to fit your needs — all with finest engineering and exclusive quality features. Mounted on rugged carriers for dependable performance on the job and between jobs.

Model	Crane	Shovel	Hoe	Dragline	Clamshell
513T	10 Ton	½ Yd.	½ Yd.	½ Yd.	½ Yd.
1014	15 Ton	⅝ Yd.	⅝ Yd.	⅝ Yd.	⅝ Yd.
1520T	20 Ton	¾ Yd.	¾ Yd.	¾ Yd.	¾ Yd.
360T	30-40 Ton	.....	.....	.....	.....

MOBILE CRANES
2 CONVERTIBLE MODELS

Self-propelled, one man controlled and operated, for on or off highway use. Big capacities, short turning radii. Convertible for greater versatility.

Model	Crane	Dragline	Shovel	Hoe	Clamshell
357	15 Ton	½ Yd.	½ Yd.	½ Yd.	½ Yd.
1520	20 Ton	¾ Yd.	.....	.....	¾ Yd.

UNIT
CRANE AND SHOVEL CORP.
Milwaukee, Wisconsin

UNIT CRANE AND SHOVEL CORP.
6315 West Burnham Street, Milwaukee 19, Wisconsin

Please send complete information on the following

Unit machines. Model..... Attachment.....

Name..... Title.....

Company.....

Address.....

City..... State.....

NEED MORE AIR RESERVE

for safer control of off-the-road equipment?

INSTALL Wagner Lockheed ROTARY AIR COMPRESSORS

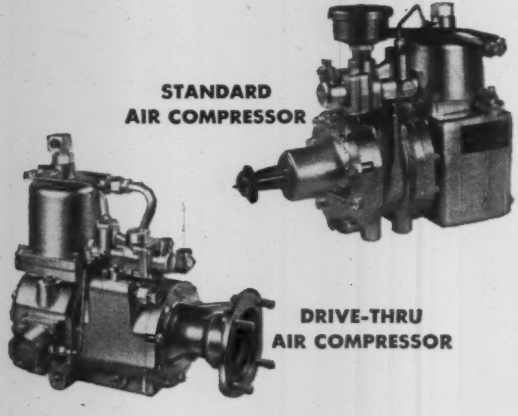

STANDARD AIR COMPRESSOR

DRIVE-THRU AIR COMPRESSOR

You'll have plenty of air reserve for braking and control when you use Wagner Lockheed Rotary Air Compressors on your equipment. Rotary action, with four impulses per revolution instead of two, assures rapid pressure recovery—ample air reserve.

Rotary operation cools air in compressor and dome before it is discharged into the line. Low discharge temperature prevents carbon formation—reduces fire hazard—lets you use flexible hose for the discharge line. The smooth operation created by thousands of small, overlapping air compression impulses per minute increases belt and coupler life—eliminates severe shock to the drive train. The use of only two sleeve type bearing surfaces adds to compressor life. Bearings have steel-backed, babbitt-lined, renewable inserts.

Wagner Lockheed Rotary Compressors are available in either 9 C.F.M. capacity, air or water cooled; or in 12 C.F.M. capacity, water cooled. Also in a "Drive-Thru" type for diesel engines.

Complete Balanced Systems for your Equipment

Look to *one* source—Wagner . . . for complete braking systems . . . straight air or air over hydraulic. Wagner's wide variety of brake products includes power source, application units, and foundation brakes. REMEMBER, when ordering new equipment, be sure to specify Wagner Lockheed. Full details are yours in Catalog KU-201.

CONSULT YOUR WAGNER AIR BRAKE SPECIALIST

. . . There's one in every Wagner Branch. He is a factory trained expert who can assist you with your air brake program.

Wagner Electric Corporation
6380 PLYMOUTH AVENUE, ST. LOUIS 33, MO.

WK60-2

LOCKHEED BRAKE PARTS, FLUID, LINING and LINED SHOES • AIR HORNS • AIR BRAKES • TACHOGRAPHS • ELECTRIC MOTORS • TRANSFORMERS • INDUSTRIAL BRAKES

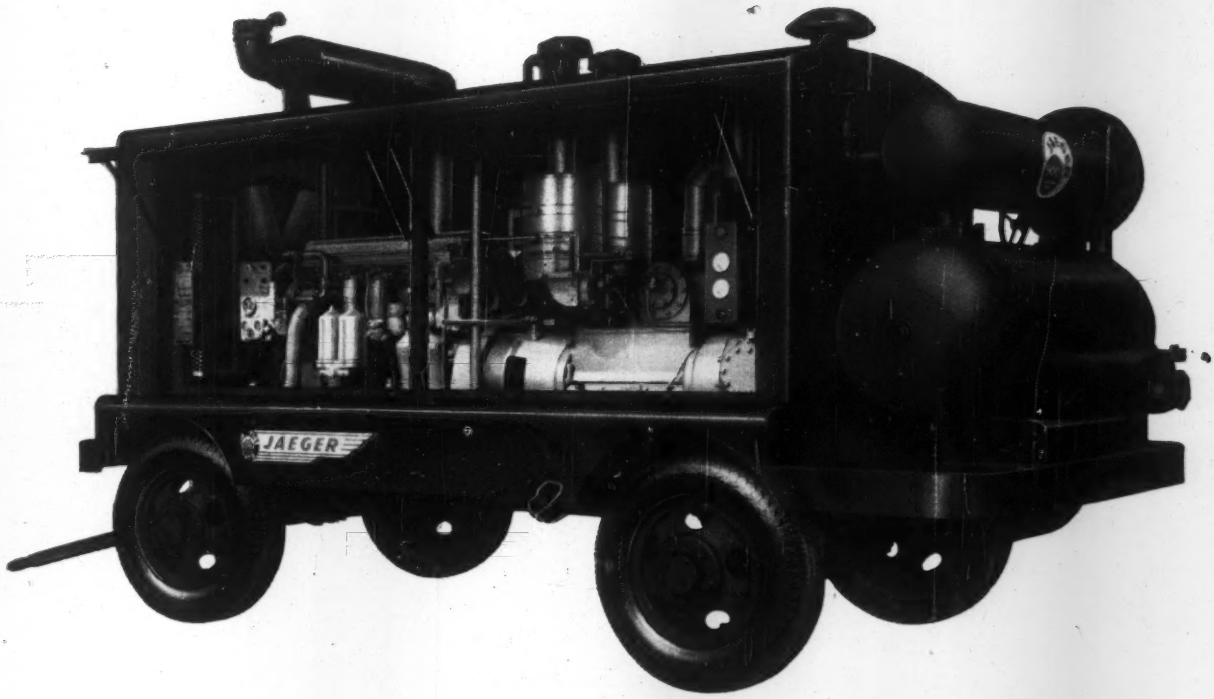

JAEGER ANNOUNCES a more efficient "900" rotary

» The first "900" that delivers full capacity at a fuel-saving, engine-saving 1700 rpm . . . using the same GM 6-110 diesel which others operate at 1800. Your fuel factor is more than 500 cfm delivered air per pound of fuel consumed. *Ask your Jaeger distributor for details — or send today for complete catalog of Jaeger rotary air compressors.*

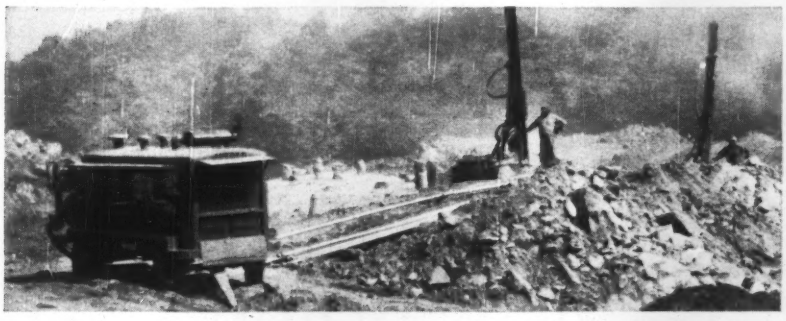

ON THIS TYPICAL ROCK JOB with two 4½" crawler-drills, the Jaeger "900" maintained 100 psig at the drills while never running faster than 1500 rpm. That's efficiency, that's fuel economy, that's long life.

THE JAEGER MACHINE COMPANY, 200 Dublin Avenue, Columbus 16, Ohio

PUMPS • MIXERS • TRUCK MIXERS • PAVING MACHINES

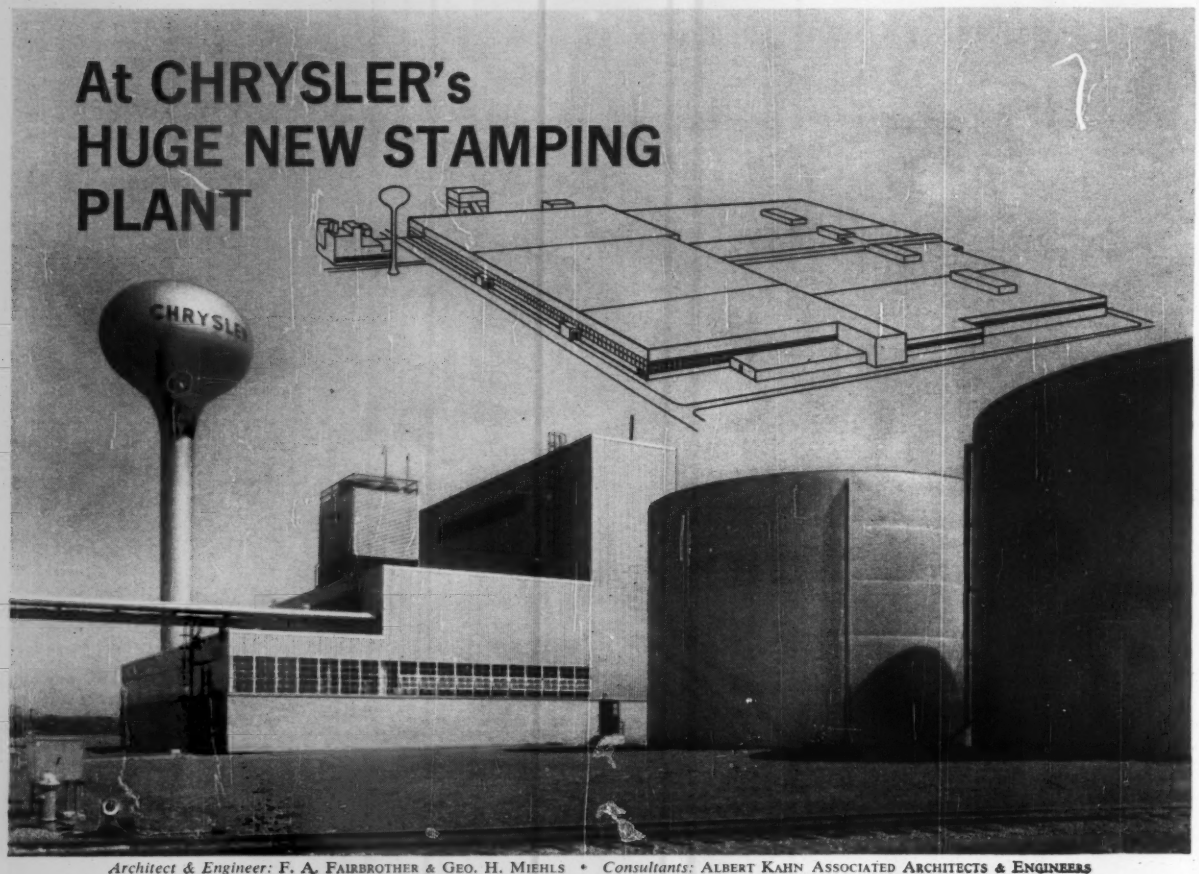

Architect & Engineer: F. A. Fairbrother & Geo. H. Miehls • *Consultants:* Albert Kahn Associated Architects & Engineers
Mechanical Contractor. The Stanley Carter Co.

JENKINS VALVES assure reliable, economical control of Production's Lifelines

Cited as one of the nation's "Top Ten Plants of the Year", Chrysler Corporation's stamping plant at Twinsburg, Ohio, is a 34-acre model of building and manufacturing efficiency.

Go into the power plant and you will find Jenkins Valves everywhere, controlling "production's lifelines" that supply 150,000 pounds of steam per hour . . . 30 million cubic feet of air per day . . . 7500 gallons of cooling water per minute. Jenkins Valves got the job because "every effort was made to install the finest mechanical and electrical equipment . . . and to insure minimum costs by eliminating excessive upkeep and equipment with a short life span".

It is a highly significant fact that all building experts and operating engineers agree *"there's nothing better than Jenkins Valves"*. Many will always insist on JENKINS for critical services, and will prefer them for general use. After all, Jenkins Valves cost no more!

When you are buying or specifying valves, remember that the best valves are the best assurance of economical service. Jenkins Bros., 100 Park Ave., New York 17.

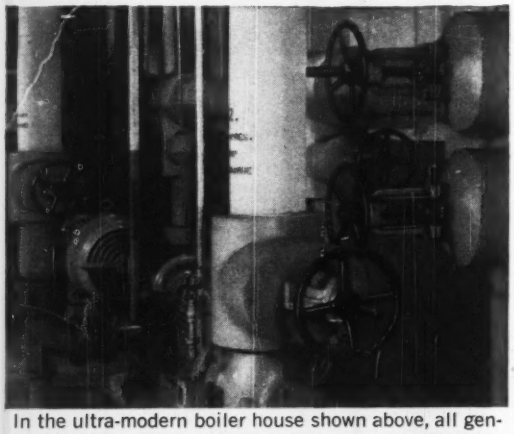

In the ultra-modern boiler house shown above, all general service valves controlling pipelines are JENKINS

JENKINS
LOOK FOR THE JENKINS DIAMOND
VALVES
JENKINS SINCE 1864 Jenkins Bros

Sold Through Leading Distributors Everywhere

ENGINEERING NEWS-RECORD

Vol. 164, No. 1 January 7, 1960

Number of copies printed this issue 85,282

CONTENTS

Outlook: Another Big Year Ahead 17
Supermarket of the Future? 19
Earthslide Derails, Dunks Train 19
Building a New Bridge 'Around' an Old One .. 20
Tower Overhangs Lot Line 22
Photo-Inspection of Seattle Sewers 23
Schools Lag; U. S. Aid Unlikely 23
Seelye, Noted Engineer, Author, Dies 23
Arizona Revises Colorado Plan 24
Highway Funds: Who Pays for What? 24

FEATURES

Nylon Balloon Lifts Big Steel Dome 28
Fickle Mississippi Confined to Own Bed 32

FIELD AND OFFICE

Building Over Coal Mine Yields With Settlement 39

NEW PRODUCTS

Small Relief Maps in Plastic 40
Versatile Hydraulic Excavator 40

MEN AND JOBS

Perini Promotes C. Paterson, G. LaPorte 45
Wyoming Road Men Promoted 45

BUSINESS AND FINANCE

What Price Steel Settlement? 61
Lumber Grade Pact Coming 62
Public Works 'Bank' Suggested 62
December Awards Put '59 Ahead of '58 64

LABOR

Wage Increases are Tapering Off 69
How to Use U. S. Training Funds 71

Reader Comment ... 6 Materials Prices 50
Washington Observer 15 Construction Reports . 52
Obituaries ..... 49 Statistics, Indexes ... 60
Editorials 84

Picture Credits

Cover—Black Star; 19—bottom, Wide World; 20, 21—Pacific Crane & Rigging Co.; 28, 29—top left, Gravemann Photography Studio, top right, lower left, lower center, Black Star; lower right, Photo-Art Shop; 32, 33, 36—Corps of Engineers; 39—British Information Service.

ENGINEERING NEWS-RECORD is a consolidation of Engineering News and Engineering Record, effected in 1917. The Contractor was consolidated with ENGINEERING NEWS-RECORD in 1918. Engineering News was founded in 1874 as The Engineer and Surveyor, which subsequently became The Engineer, Architect and Surveyor, Engineering News and American Railway Journal, and finally Engineering News. Engineering Record was established in 1877, as the Plumber and Sanitary Engineer. Subsequently it became The Sanitary Engineer, Engineering and Building Record, and, finally, Engineering Record.

All rights to the above titles are reserved.

THE CONSTRUCTION WEEK

ASWAN START DUE THIS WEEK—Construction of Egypt's Aswan Dam is about to begin. Soviet equipment has been moving up the Nile from Alexandria for weeks. President Gamal Abdel Nasser plans to push a button this Saturday to set off the first blast of the big job.

HATCH ACT HAS TEETH—The State of Utah may forfeit about $40,000 in federal highway funds for failure to discharge three highway department employees accused of violating the Hatch Act. The Hatch Act restricts political activities of certain categories of governmental employees. Employees in question allegedly participated in a GOP fund-raising banquet in 1958.

STRIKE THREE—About the time the Los Angeles Dodgers play their first game next summer, wreckers will start tearing down Ebbets Field, home of Brooklyn's late and lamented team. In its place will go a $22.7-million apartment building for 1,317 families—the largest single structure of its kind in New York City. The H-shaped building will have a 25-story center and 22-story wings.

POWER POLITICS—A warning that the U.S.S.R. is catching up with the U.S. in electric power production appears likely to refuel the drive for more federal power. The warning is contained in a report prepared by a group of Senators that toured Soviet power facilities last October.

PLAN PANNED—The proposed zoning regulation for New York City is a "monstrosity, a most complicated thing," according to Samuel Rosenblum, chairman of the Codes Committee of the New York State Society of Professional Engineers. The group says the resolution (ENR Dec. 24, 1959, p. 21) is impractical—contains too many criteria to process.

TIMES CHANGE—A year ago, Engineers Joint Council adopted an austerity budget that excluded a special $2,500 expenditure for public relations. Its 1960 budget, by contrast, will have $15,000 in it for communication with members of EJC societies. Most probable medium: a quarterly publication called ENGINEER. An editor is already hired.

ANOTHER CONTRACT HAZARD—The U.S. Mail posed an unexpected hazard to Johnson, Drake & Piper on a bid for expressway construction in New York State. Mailed in time, the contractor's bid didn't show up at the letting. Later, the $350,000 bid check—minus bid and envelope—was found on the floor of a postal substation. The lost bid was not low. Postal inspectors assume the mail was rifled but the check was too big to handle.

HOW TO HANDLE WET JOBS

Project: Sanitary Sewers, El Paso, Texas
Contractor: T. N. O'Kelley, Utility Contractors, El Paso, Texas
Owners & Engineers: Public Service Board, El Paso, Texas

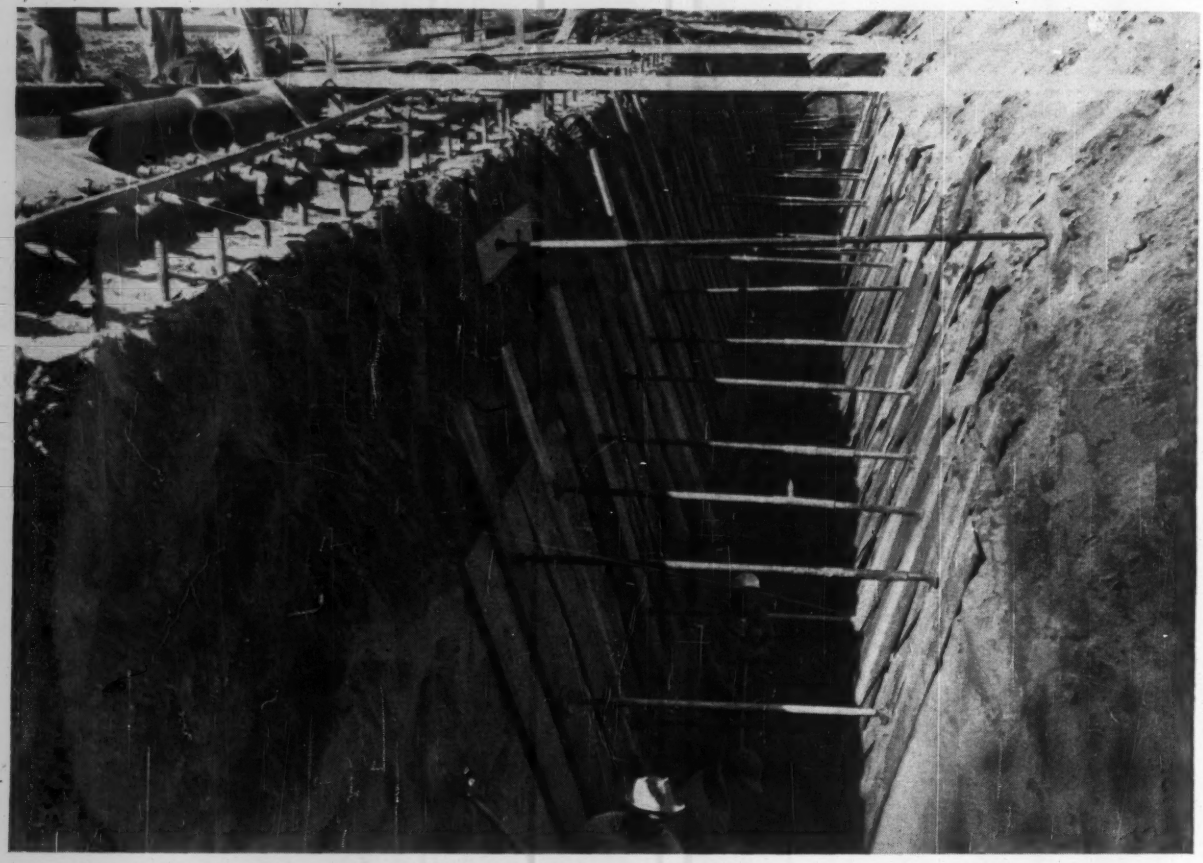

Wellpoints on 1 side perform unusual feat in coarse sand . . .

Dry 18-ft Deep Trench at 3,700-ft Elevation

At the reduced atmospheric pressure of 2/3-mile above sea level, any pump works at a handicap. To compound this problem, the contractor desired to install his wellpoint system (Griffin system) at ground level. Previous wellpoint practice in the area was to place the system on a berm nearer subgrade because of pump lift limitations.

• **Question:** in coarse water-bearing sand near the Rio Grande River, with discharge lines as long as 700 ft at times, could the necessary 18 ft lift be attained by a wellpoint system installed on only one side?

• **Based on previous** local experience it did not seem feasible, but events proved otherwise. Dry conditions were successfully maintained from the start, enabling T. N. O'Kelley to beat his 100-day time limit by 40 days.

GRIFFIN WELLPOINT CORP.

SALES • RENTAL • CONTRACT

GENERAL OFFICE: 881 East 141st St., New York 54, N. Y.

BRANCHES: HAMMOND, IND. • HOUSTON, TEX. • NEW YORK, N. Y. • JACKSONVILLE, FLA. • WEST PALM BEACH, FLA.

In Canada: Construction Equipment Co., Ltd., Toronto • Montreal • Edmonton • Vancouver
In Venezuela: Drew Bear & Sons C.A., Caracas • Maracaibo

25th YEAR

WASHINGTON OBSERVER

- **Interstate clearance clearing up?**
- **Another mortgage prop coming?**
- **TVA sees growth ahead**

● **A 16-ft bridge height clearance on the Interstate system is all the Department of Defense can justify right now. But it says a 17-ft clearance would be highly desirable.** That is what the Secretary of Defense has officially told the Secretary of Commerce, who will finally decide. It means the present 14-ft clearance may go up only 2 ft, instead of 3 ft.

That would cut the cost of building future bridges to about $200 million. A 17-ft bridge would cost $330 million.

Defense now wants to review all existing Interstate bridges with Commerce to determine the best way to provide by-pass routes around them. In some cases this may require raising present bridges, but Defense thinks by-pass routes can be found in most cases.

Higher clearances or by-pass routes are needed to transport intercontinental ballistic missiles.

● **An emergency $1 billion to buy FHA and VA low-cost home mortgages is proposed** in a bill that Rep. Albert Rains (D., Ala.) says will get prompt consideration by his housing subcommittee.

The legislation would re-enact the anti-recession device of 1958, give $1 billion to Federal National Mortgage Association to purchase government-backed mortgages up to $13,500, or $14,500 in high cost areas.

Homebuilders have taken no stand for or against the proposal. They will wait until the NAHB convention in Chicago next week to state their position. The decline in home starts has not yet gone far enough to cause much clamor for emergency relief.

● **The Tennessee Valley Authority emphasizes future growth in its annual report.** It talks of planned new navigation and power projects: Melton Hill Dam (72,000 kw) on the Clinch River; an expansion of the Fort Loudon Dam on the Tennessee and Little Tennessee rivers; Nemo Dam on the Obed River; a new navigation lock at Wheeler Dam on the Tennessee.

TVA points out it will need to build about 1 million kw of new generating capacity—hydro or steam—every year to keep up with demand. This will require a $175-million construction budget in fiscal 1961 and about $225 million annually for a few years afterward. About one-third of this money will come from TVA's own power revenues, the rest from new revenue bond financing.

● **A ruling by California's attorney general appears certain to have strong implications for Buy American policies.**

The ruling was made following complaints by General Electric and Westinghouse Electric that Los Angeles had violated California law when it awarded a $9.2-million contract to Brown-Boveri of Switzerland for two 230,000-kw steam generators. California law requires municipalities to buy products only from suppliers who agree to use or supply "substantially all materials which are manufactured in the U. S."

State Attorney General pointed out that the California law conflicts with a federal "favored nation" treaty with Switzerland, and that where such a conflict occurs, the federal treaty prevails.

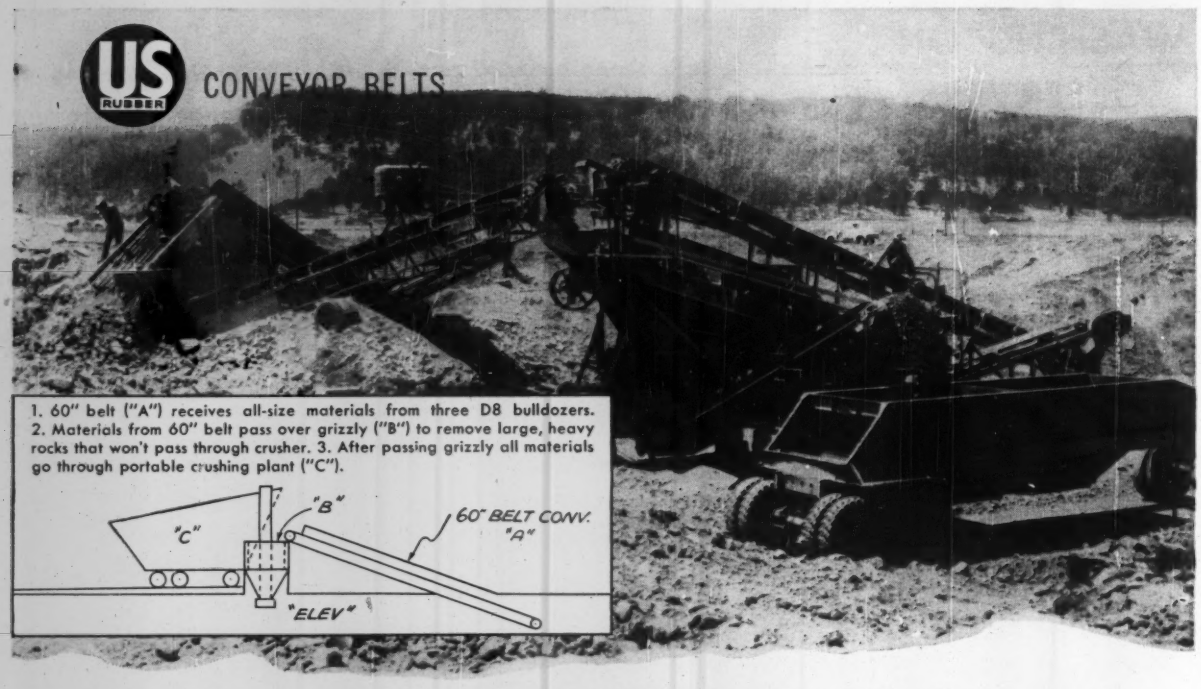
US RUBBER
CONVEYOR BELTS
1. 60" belt ("A") receives all-size materials from three D8 bulldozers. 2. Materials from 60" belt pass over grizzly ("B") to remove large, heavy rocks that won't pass through crusher. 3. After passing grizzly all materials go through portable crushing plant ("C").
"C"
"B"
60" BELT CONV. "A"
"ELEV"

Conveyor equipped with U.S. Matchless Belt increased production from 175 tons to 300 tons per hour

Such records as this have made U.S. Rubber the world's largest producer of conveyor belts.

In this instance the "U.S." Belt helped increase production at the Carlson-Lien Company (Piedmont, S.D.), a supply firm currently producing road-building crushed rock and delivering it to highway projects. The belt is 60" wide, 35 feet from center to center (78 feet overall). "Our intention," says Bruce Lien, company secretary-treasurer, "is to replace all belts with U. S. Rubber Belts."

In this operation, bulldozers push the rocks to be processed into the loading point. The conveyor belt then carries this material to the grizzly. The belt was designed to withstand direct loading by bulldozers. The impact of the large rocks falling directly on the belt does not damage the conveyor system. This permits the grizzly to be placed at the discharge end of the conveyor instead of at the feed point as in conventional installations.

The superiority of this belt not only helped speed up and increase production, but also eliminated the need for three or four men to laboriously remove large rocks that would damage a belt of inferior quality. The "U.S." Belt proved so efficient in tons moved per hour that another bulldozer was added to keep the loading pit stocked with raw materials. "The belt will pay for itself on this one job. We recommend it to anyone," says Bruce Lien.

• • •

When you think of rubber, think of your "U.S." Distributor. He's your best on-the-spot source of technical aid, quick delivery and quality industrial rubber products.

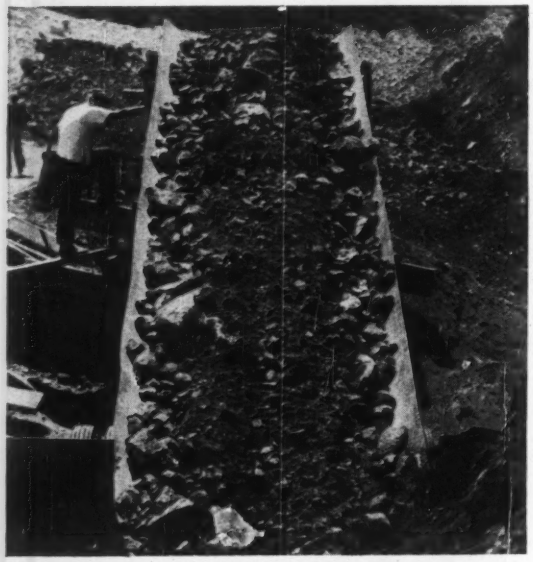

Close-up of 60" U. S. Matchless® Belt carrying rocks from raw material pit up incline to crusher.

This installation was handled by "U.S." Distributor W. S. Nott, Minneapolis

US RUBBER

Mechanical Goods Division

United States Rubber

WORLD'S LARGEST MANUFACTURER OF INDUSTRIAL RUBBER PRODUCTS

Rockefeller Center, New York 20, N.Y. In Canada: Dominion Rubber Company, Ltd.

Outlook: Another Big Year Ahead

- **Construction volume in 1960 should come close to the record of $21.7 billion set in 1956, with most types of work up.**

- **That will be a healthy increase over 1959's $20.3 billion and a continuation of the upward trend halted by the '57-'58 recession.**

The construction industry wrote up its second largest dollar volume of new business in 1959—$20.3 billion in heavy construction contracts, according to ENR figures.

Construction men sold this 6% increase in work without extra federal aid for highways or special assistance for housing—two crutches that the federal government used to pull the U. S. economy out of the 1958 recession. Construction lifted its volume by a giant $1.1 billion, re-establishing the growth trend that ended with the recession of 1957-58.

The industry is now set to jack up its 1960 sales by an even greater amount—$1.3 billion—to a near-record $21.6 billion.

ENR forecasts that private construction awards will rise by 6%, public works by 7%. These increases will push this year's total very close to 1956's record $21.7 billion.

A bigger year than '59 is ahead for most types of work. Sharpest increases should come in industrial building and bridges, both up 34%, waterworks up 21%, commercial building up 16%, highways up 15% and sewerage up 11%.

New highs will be set by commercial building, waterworks, sewerage and bridges (by a narrow margin over the 1953 high). Also setting a new high this year will be missile facilities construction, a newcomer to the ranks of major types of construction in '59, when it tripled its 1958 volume.

These increases will more than offset declines of 17% likely in private mass housing, 19% in public housing and 7% in public nonresidential building.

Plans for future construction turned sharply upward in 1959. Some 20% more construction entered the planning stage than during 1958. This pushed the ENR Backlog of Proposed Heavy Construction up to a record of more than $117 billion as of December 31.

To clear the way for a bigger rise in contracts this year than last, the construction industry had to crash three rugged roadblocks late in '59. The way the industry absorbed these shocks and came out stronger than ever made '59 one of the most crucial years in construction history.

The most serious—and most literal—of the 1959 roadblocks was the cutback in highway and bridge contracting. The Bureau of Public Roads told the state highway departments in August that the Highway Trust Fund was dangerously low; the states couldn't count on reimbursement for the federal share of future Interstate and ABC awards.

Within weeks three out of every four state highway departments canceled bid calls or postponed contract awards. Contracts dropped off sharply, hitting a low in October.

When BPR came out early in October with its blueprint of quarterly controls on federal aid for fiscal 1960 and its apportionment of aid for fiscal 1961, highway and bridge contractors took the news grimly. State highway departments were chafed. The control schedule allowed the states to obligate only a small portion of their fiscal 1960 federal aid in the October-December period. Some states just gave up calling for bids for the remainder of the year because they felt the small amount of federal funds didn't justify a letting.

Result: Highway and bridge contracts in the second half of 1959 fell 15% below the first half of the year and 38% under the record six months of July-December 1958 (which included extra federal aid to fight the recession).

Highway awards for 1959 wound up 22% under 1958's all-time high, though it did manage to top other previous years. Bridge contracts fell 17% under '58 to the lowest since 1955. (Note that ENR's 1959 total for bridges doesn't include the July $126-million contract for the Chesapeake Bay Bridge-Tunnel, which is in abeyance until the bonds to finance the project are sold.)

The second roadblock of '59 was the prolonged steel strike. Contractors generally took no chances on being caught short by lack of steel due to a strike. They ordered early as much of their third quarter steel needs as was feasible for delivery by June 30, the day the steelworkers' contract expired.

The advance preparations paid off. The tempo of construction schedules held high until October. Then shortages of structurals and bars began to slow an increasing number of projects.

But the most serious effect on the construction industry was what the steel strike did to the industrial market.

Proposed industrial plants had piled into the planning stage at a very fast pace during the first five months of '59. But when the strike appeared imminent in June, industry began to hold back on appointing engineers and architects to design new plants. The slowdown continued during the strike. And while the resumption of steel operations triggered a substantial increase in proposed plants, the reduced rate of plans during June-October '59 could mean a slow start on what should be a very big industrial building market this year.

The steel strike didn't catch up to industrial plant construction contracts until October. Then its effect was noticeable as awards plunged. The resumption of steel output in November brought a flurry of contracts, followed by a reduced pace through the end of the year—probably reflecting the cutback in plans early in the summer.

However, industrial awards for the year soared 70% above 1958's four-year low. The $2.98-billion total came close to '57, but was far below the '56 peak. In 1960, industrial contracts should step up by a healthy amount and score the third highest dollar volume of the postwar period.

Commercial building plans showed a similar, though less pronounced, reaction to the steel strike. But commercial building contracts dropped off earlier in the strike—declining steadily between August and October. However, awards perked up in November and by year's end commercial had racked up, as expected, a new all-time high. Contracts came close to $2.2 billion, 21% above 1958's low total and 6% greater than 1956's record.

(*Turn the page*)

Heavy Construction Contracts Forecast † (in millions)

	1958 Actual	1959 Actual	% Chg. 58–59	1960 Forecast	% Chg. 59–60
All Heavy Construction	$19,165	$20,279	+ 6	$21,580	+ 6
By Ownership					
PRIVATE	7,730	10,388	+34	11,035	+ 6
PUBLIC	11,435	9,891	−13	10,545	+ 7
State & Municipal	8,609	7,142	−17	7,670	+ 7
Federal	2,826	2,749	− 3	2,875	+ 5
By Type of Work					
PUBLIC					
Waterworks	306	373	+22	450	+21
Sewerage	618	653	+ 6	725	+11
Bridges*	713	569#	−20	760	+34
Highways	3,729	2,887	−23	3,320	+15
Earthwork, Dams & Waterways	1,045	911	−13	950	+ 4
Buildings:					
Excl. Housing	2,610	2,575	− 1	2,400	− 7
Housing	1,055	571	−46	465	−19
Unclassified	1,369	1,364	− 0.4	1,485	+ 9
PRIVATE					
Buildings:					
Mass Housing	3,739	4,694	+26	3,900	−17
Commercial	1,795	2,152	+20	2,500	+16
Industrial	1,756	2,981	+70	4,000	+34
Unclassified	429	549	+28	625	+14

† In Continental U. S.; excludes Alaska and Hawaii.
* Includes private bridges.
# Does not include $126-million Chesapeake Bay Bridge-Tunnel contract, which has been removed from these statistics until the bonds are sold.

The third roadblock was money—too little capital to meet the demand. And this created an important shift in the 1959 construction market. This shift will be more pronounced in 1960 because demand is going to step up faster.

The supply of new capital for construction and other borrowers is the balance wheel for the over-all construction market. But as this balance wheel is moved in the direction of industry's demand for more money to invest in new plants, equipment, inventories or working capital, the mass housing market finds itself going in the opposite direction—toward tight mortgage money.

Industry is more able to pay the higher borrowing costs that investors may require. But interest ceilings on government-insured mortgages limit homebuyers' ability to compete for the investor's dollar when interest rates are rising.

However, high profits in the first half of '59 and record depreciation reserves generated by industry have paid about 80% of construction bills arising from the 1959 industrial building upturn. So industry's demand on the capital markets has risen slower in relation to construction contracts than it did in the '55-'56 expansion, for example. Moreover, the financing needs of industry usually trail industrial contract peaks.

This situation allowed mass housing contracts to run up a thumping 26% jump in '59, while industrial building spurted 70%.

While industry's security sales for construction money rose rather sharply in the fall of '59, total demand for the year was down 17% from '58, according to ENR figures. State and local construction bonds, meanwhile, dipped 6% below last year.

These cuts left enough slack to allow mortgage loans to rise and to permit increases in federal government and consumer debt.

Tight money is the only one of these roadblocks facing construction planners in 1960. Industry will up its demand for capital to pay increased construction bills and rebuild inventories. So mass housing will drop about 17% below the figure for 1959.

Rising money costs are also likely to hold down the 1960 gain in commercial building and limit the volume of some types of local public works, to the extent that local agencies are unwilling to pay higher borrowing costs or are prohibited from doing so by law.

The pillar of strength in 1959's healthy construction market was private work. Contracts shot up 34% above 1958's four-year low. This jump in private work offset a sharp 17% drop in state and local awards and a 3% dip in federal public works.

Star performer in private work was industrial building, up 70%. This rise enabled private work to move ahead of public in total volume for the first time since 1956. All other major types of private work contributed to the gain—mass housing up 26%, commercial up 21% and private "unclassified" up 17%—mainly due to a hefty expansion in gas pipeline construction contracts.

Waterworks up 23%, sewerage increasing 6%, and missile base construction were the only major types of public works to give contractors more business last year than in 1958. All three set new highs. And they should rise even further in 1960.

Missile base construction became a major construction market in 1959, as awards soared to more than $350 million. This was about three times the 1958 volume reported by ENR. And the outlook is bright—awards this year should rise an additional 15%.

Contracts for municipal and county airports also set a record in '59 of $157.5 million, up 23.3% over the '58 high.

Sharp declines in highway and bridge awards reflected the agonizing readjustment in the federal-aid highway financing program.

The moderate 13% decline in earthwork-dams-waterways reflected a cut in new starts for federal projects and the fact that 1958's total included hundreds of millions for the New York State Power Authority's Niagara project. However, 1959 did have at least one whopping dam contract—the $93-million contract for Wanapum Dam by Grant County Public Utility District, Washington.

And 1960 should have a more liberal sprinkling of new dam projects if the Administration proves out expectations that it will relax on its stand against new starts.

Public building awards dipped in 1959. Declining school contracts contributed to a 12% drop in state and municipal nonresidential building. But federal projects increased, getting a substantial assist from increased awards for TVA steam electric plant construction.

Public housing awards dropped more than any other key type of construction. The year saw a cutback of nearly 50% in Capehart military housing—awards in the second half of '59 totaled a little over $50 million, compared to more than $250 million in the first half of '59 and $240 million in the second half of 1958.

Down about 40% were local housing projects financed under slum clearance programs, while other state and local public housing contracts fell by one-third from their 1958 total.

Long Strike Is Settled At Glen Canyon Dam

Work on Glen Canyon Dam, shut down by a strike since July 15, resumed this week after prime contractor Merritt-Chapman & Scott and the five striking crafts agreed on premium pay of 50 cents an hour.

First of the workers returned on Monday. M-C&S plans to rehire as fast as operations permit. No estimates are available as to the strike's effect on construction schedules, but work was ahead of schedule when strike began.

Settlement was reached after the Associated General Contractors of Arizona assured the Phoenix Building and Construction Trades Council that the premium pay formula for workers at the dam would not expose the unions to liability under their state-wide contracts with AGC members.

The strike originally began over union demands for subsistence pay of $6 a day. This demand was later dropped and subsequent negotiations concentrated on the issue of premium pay (ENR Oct. 29, 1959, p. 90).

One Killed, Four Injured In Apartment Failure

One worker was killed and four others injured when part of a reinforced concrete floor in a seven-story, wall-bearing apartment building under construction collapsed in Arlington, Va. A 24x30-ft section of the first floor slab gave way as crews were placing concrete.

The slab was reinforced with paper-backed wire mesh, which also served as permanent forms for the slab. The mesh was supported on open web steel joists.

Arlington County building inspectors found there was no violation of local building codes involved in the accident. However, their report recommended that, in the future, builders tie together the three joists at each end of a run of mesh. Horizontal rod cross-bracing, welded to the top chord, would form horizontal trusses to restrain the end joists against overturning under the pull of the paper-backed mesh when concrete is placed. This requirement appears in the manufacturer's directions on each roll of the mesh, but allegedly wasn't followed by the builder.

There were no wall ties at bridging lines anchoring the end bay joists spanning parallel to the wall.

Sheridan & Behm, Arlington, Va., are the architects for the $2.5-million project. George Fortune, Alexandria, Va., is the structural engineer. Owner-builder is Reinsch Construction Corp., Arlington, Va.; William Seltzer, Washington, D. C., is the concrete subcontractor.

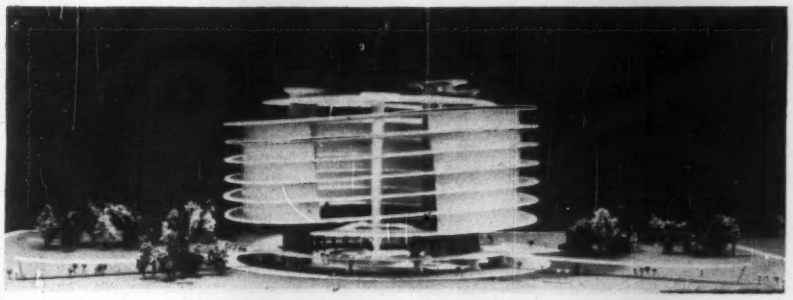

Supermarket of the Future?

A proposed spiral-ramped supermarket, featuring automatic self-service, bears a startling resemblance to Frank Lloyd Wright's Guggenheim Museum. A model was displayed last week at the Food Exposition and Country Fair held in the New York Coliseum.

A passenger elevator would carry shoppers to the top floor, where they will travel down a spiral ramp on a moving sidewalk past food displays. At any point of the trip buyers would step off the sidewalk and mark items for purchase. Shoppers' selections would travel on electronically controlled conveyors to the check-out point, where a computer produces an itemized bill.

Cost estimate by the designer, Prof. W. N. Breger, is $12 per sq ft for the reinforced-concrete building. This compares with about $10 per sq ft for conventional supermarket buildings. Prof. Breger estimated $350,000 for the moving sidewalk and $30,000 for each check-out counter. All estimates assume economies attainable in a large-scale building program.

Prof. Breger, who is chairman of the architectural design department of Pratt Institute, was assisted by Michael Brill. Martinson & Gage of New York City are engineering consultants.

Daitch-Shopwell supermarket chain sponsored Prof. Breger's study.

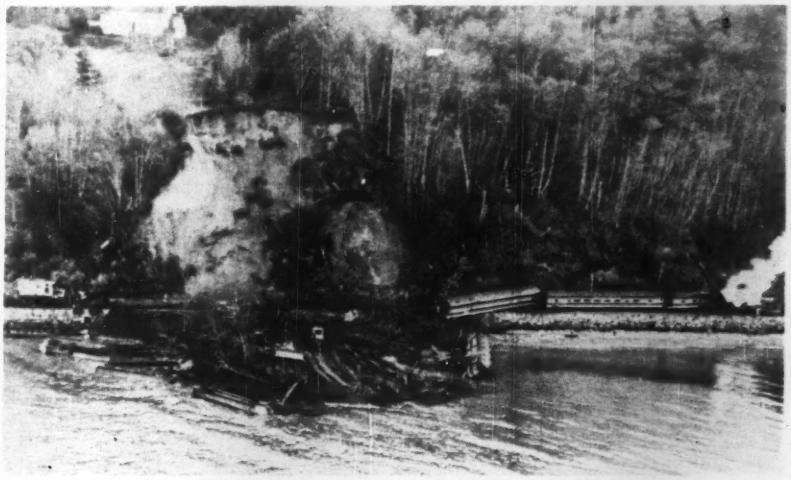

Slide Derails, Dunks RR Cars

An earthslide north of Seattle played havoc last week with a crack passenger train belonging to the Great Northern Railway Co.

The slide, involving an estimated 10,000 cu yd of dirt, occurred in two separate earth movements some 20 minutes apart. The first movement derailed a four-section diesel locomotive and mail car. The second pushed them into Puget Sound and derailed six passenger cars. In the time between the slides, train passengers were able to get clear. Only 10 persons were injured, none seriously.

The accident occurred between Seattle and Everett on a 30-mile section of track known to be in a slide area.

It was attributed to hydrostatic pressure built up in and behind a previously undetected clay pocket. Despite extensive damage, including 650 ft of ripped-up track, repair crews had the line back in operation within 24 hours.

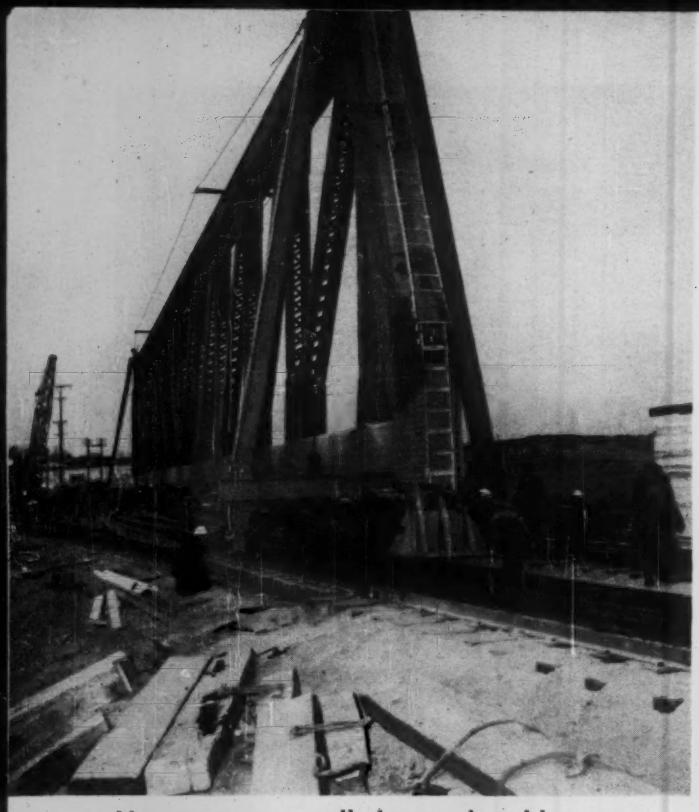

New truss was pulled onto the old span . . .

and lifted by two sets of tackle at each end . . .

Between Trains: Building a New

The Union Pacific Railroad is building a 247-ft span around an existing bridge while trains continue to use it. The bridge is over the Snake River at American Falls, Idaho.

By use of the span-around-a-span technique, the railroad will have interrupted traffic on the bridge for just a few hours during the six-month construction period.

The span being replaced is a deck structure built in 1902. Not only has it lived out its useful life, but it's an open deck (ties laid on stringers) and that makes it vulnerable to fire. Trusses for the new span weigh one ton per foot. They will support a ballasted deck impervious to fire; and their load capacity is sufficient to carry any foreseeable motive power.

Both the maintenance of traffic on the existing span and the physical setting of the bridge posed problems that found a common solution in the construction procedure being used.

The bridge is part of the Union Pacific's single-track main line to the Pacific Northwest. Detouring trains over "foreign" lines while the bridge was built would have been prohibitively expensive.

To build a "shoo-fly", by-pass the old span—it would also have been expensive, because of the crossing's height. From rails to the surface of the Snake River directly below is 110 ft. This height also ruled out conventional construction utilizing falsework.

For these reasons, engineers adopted the span-around-the-span technique. This approach permitted traffic to continue virtually uninterrupted and allowed the use of the existing span as a base from which to erect the new span.

In concept, the method is simple. The two trusses of the new span were set on the existing concrete piers, outside the trusses of the old span. Cross members for the new span are being worked through and around members of the old span. When the work is finished, load will be transferred from the old structure to the new. Then workers will disassemble the old structure, piece by piece.

Simple as the method is in essence, its execution is not. It requires a high degree of ingenuity and skill.

The riveted truss members, fabricated in Omaha by Paxton and Vierling Steel Co., were shipped to American Falls for erection.

Workmen assembled the trusses on a 510-ft length of track especially laid for the job and consisting of four parallel rails. The two inner rails are standard gage 131-lb steel, connecting with the railroad's main line near the bridge. Spacing of the two outer rails is 16 ft, corresponding to the spacing of the deck trusses of the old span; these rails continue from the bank across the top chords of the old bridge.

The outer rails serve as tracks for steel outriggers attached to each side of each truss, to prevent tipping as the trusses were moved out on the old span.

Erection of each 250-ton truss was in vertical position, on two trucks. The specially built trucks resemble a standard boxcar truck in appearance but are much heavier.

Mounted transversely on each truck is a structural steel outrigger. At each end of the outrigger, workers connected an assembly of vertical members. At the bottom of each of these assemblies is a shoe, which maintained contact with the outer rail to prevent tipping of the truss. Workers also installed a heavy diagonal brace from each end of each outrigger to the top of the 40-ft-high truss. And the top chord of the truss was guyed and braced to maintain longitudinal rigidity as the truss was moved into position.

When the truss was completed, constructors pulled it slowly into position on the old span, using a winch mounted on a locomotive crane.

. . . then swung over the side. Cranes were used to drift truss into position for lowering.

Bridge 'Around' an Old One

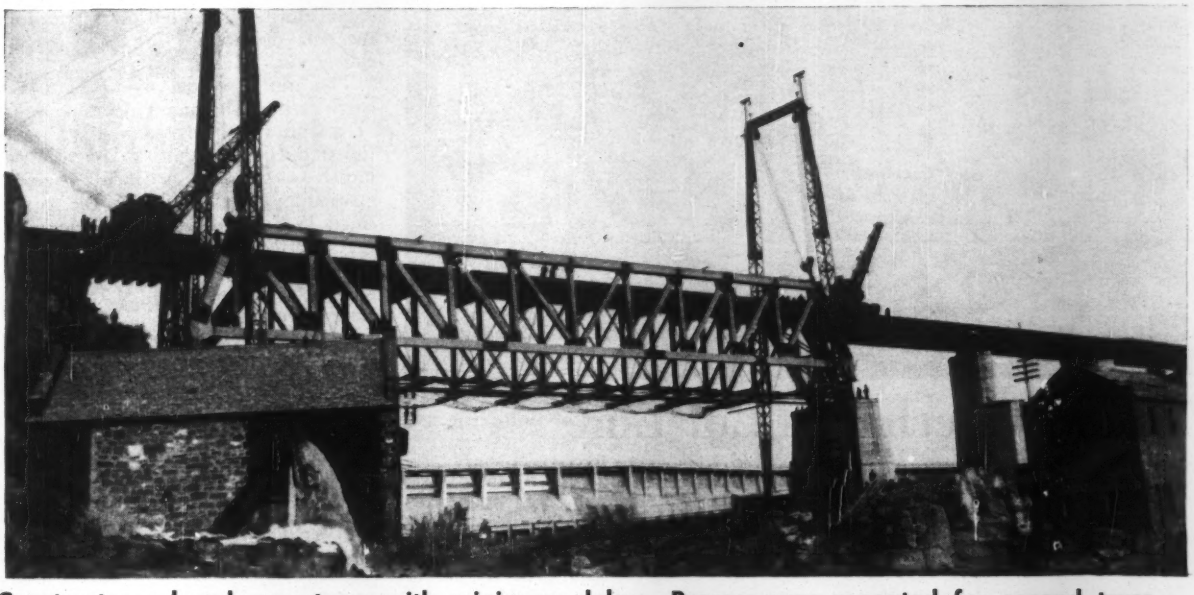

Constructors placed new truss with minimum delay. Process was repeated for second truss.

Workmen erected a frame near each end of the old span to lift the truss from the trucks and set it on the concrete piers. Each frame was made up of two structural steel legs, each 150 ft long and set on a concrete foundation, and a head frame. The two frames were cross guyed to one another and to concrete anchorages beyond the ends of the bridge. Pacific Crane and Rigging Co., a subsidiary of Macco Corp., of Paramount, Calif., furnished the frames and lifting tackle under a lease agreement; their personnel aided in developing and coordinating the procedure.

Preparation of equipment for handling the trusses required three weeks of work directed by Louis Stec of Pacific Crane and Rigging.

Each head frame carried a double

set of lifting tackle. Each load block was reeved with 17 parts of $\frac{7}{8}$-in. wire rope. Workmen used both sets of load blocks to lift the truss vertically off the trucks until it had room to swing. Then the trucks and outriggers were disconnected and wheeled out of the way. Following this, load blocks on one side of the truss were slacked off and the total load was taken by the blocks on the other side.

The effect was to swing the new truss outboard, beyond the old truss, in position for lowering. Actually, the load blocks could not swing the truss out quite far enough for adequate clearance. Engineers solved this problem by using the booms of two locomotive cranes (one at each end of the span) to drift the truss out slightly farther. The new truss was then lowered into position on the old piers and secured to the old truss, ready for installation of cross members. Lifting tackle was disconnected and swung back out of the way.

Transfer of each truss was tightly scheduled. The first was put in place in slightly over five hours. Workers placed the second truss in three hours and 45 minutes.

Placing the trusses completed the ticklish portion of the work. The remainder of the operation is comparatively routine, thanks to the planning that went into the design of the new trusses.

Both the old and new trusses have 12 panels of identical lengths. However, the panel points of each new truss are staggered with those of the old, falling midway between the panel points of the old trusses. Both top and bottom chords of the new trusses are slightly higher than those of the old. This foresight will permit workmen to place bracing and floor beams around the members of the old structure. The load will be transferred from the old structure to the new, panel by panel.

Removal of the old bridge will be made easier by beams that are playing a double role. Hung at panel points of the old trusses, they carry safety nets. When the new bridge is completed, workers will transfer hangars for the beams to the new trusses. The beams then will serve both for the net and as supports to permit dismantling of the old structure without falsework.

Cost of the project is about $500,000. The 247-ft truss span is part of a 962-ft crossing, including deck girder approach spans. Now of open deck construction, they will be converted to ballast-type deck in the near future.

The operation was directed by James Curran, bridge engineer of the Union Pacific Railroad. Frank Cogan is project engineer for Pacific Crane and Rigging.

Tower Overhangs Lot Line

Cantilevered framing will provide an additional 10,000 sq ft of floor space in upper stories of San Francisco's newest downtown office building, now under construction. Completion date for the $10-million project is August, 1961.

The owners acquired air rights on two sides of the building. This enabled them to extend above-ground stories beyond the property line.

Girders cantilever out 15 ft on all four sides. They are 27-in. WF sections, welded to column flanges.

Typical floors have a 15-ft square reveal at each corner. This provides eight corner offices on each floor. Air-conditioning ducts, 6 ft square, will appear as gold-plated shafts inside these reveals.

Exterior walls above ground floor will be faced in white quartz; ground-floor walls will be granite-faced.

Architect is Anshen and Allen; structural engineers are two cooperating firms: Robert D. Dewell, and Gould and Dekenkolb; general contractor is Dinwiddie Construction Co. All are from San Francisco.

Engineer Recruiting Up; School Enrollments Down

Once again the figures on engineering manpower and engineering school enrollments are demonstrating how supply and demand can get out of phase.

Engineers Joint Council announces the demand for engineers increased materially in 1959.

The U. S. Office of Education reports that undergraduate enrollment in 234 engineering colleges fell off 5% during the year—despite a 4% gain in over-all college enrollments.

The ninth annual report of EJC's Engineering Manpower Commission—"Demand for Engineers—1959"—says the stepped up recruiting last year was mostly satisfied by a 38,162-engineer graduating class. This was the largest since 1951. Holders of bachelor's degrees started at $510 per month.

EJC forecasts half again as many engineers will be recruited by 1966 as were recruited in '59.

In the face of EJC's claim that demand for engineers increased sharply from 1958 to 1959, the college enrollment figures appear a paradox.

It was the second consecutive year that freshman enrollments in engineering dropped. Enrollments fell 11% in 1958 and 3% in 1959. However, civil engineering enrollments are steady.

As opposed to the drop in engineering undergraduates, 1959 saw a 7.5% increase in enrollment in engineering graduate schools. There was a 165% jump in '58. However, the fact that graduate enrollments are at an all-time high "is not as reassuring as it should be," says Education Commissioner Lawrence G. Derthick, "because this only reflects increased undergraduate enrollments for several years prior to 1958."

Seattle's '57 failure brings . . .

Sewer Inspection by Camera

Seattle is getting at least two things out of its big sewer break of 1957—a $2-million repair bill and a new sewer inspection program.

Chief aim of the inspection program is to lessen the danger of breaks like the one that caused a 120x200-ft cave-in 60 ft deep in November, 1957 (ENR Nov. 21, p. 15, Dec. 12, p. 24 and Dec. 19, 1957, p. 26).

It is unlikely that any type of inspection could have prevented that break, but current inspection methods have revealed defects in other sewers.

The program involves an expenditure of $30,000 a year. Carried out by a four-man crew with equipment valued at $10,000, it calls for physical or photographic inspection of several hundred miles of sewers at intervals of three to five years.

Physical inspections are limited to periods of low flow during the dry season and to sewers at least 48 in. in diameter. Photographic inspection is scheduled for 24- to 48-in. sewers.

The first 10 miles of "walk through" inspections resulted in the following recommendations:

- That laterals 10-in. and larger be connected at a downward angle and slanted with the flow of the trunk sewer to facilitate passage for inspection and maintenance purposes.
- That side sewers be connected to trunk sewers at a downward angle to prevent formation of mineral deposits, which tend to build up gradually and block off side sewers.
- That the first and second lengths of pipe out of the trunk sewer, on side sewer and lateral connections, be either shorter than the rest of the line or stronger to avoid pipe failures from settlement of backfill.
- That side sewer and lateral connections to manholes be made only at the base, to make manhole entrance possible for maintenance and inspection crews.

Where physical inspection is difficult, a water-tight camera will be towed between manholes on a small raft, automatically taking photographs of the tunnel at intervals. Photographic inspections will provide a permanent record for future comparisons.

In physical inspections, two 25-hp. exhaust fans are set up over manholes upstream and downstream from the manhole to be entered, insuring a supply of good air. Crews are equipped with gas-testing equipment and other safety devices.

Prior to the present program, sewer inspections were made by sewer cleaning and maintenance crews. Sewers were "candled" by shining a light from manhole to manhole, but this method was ineffective in the "Big Hole" area of the north trunk, where manholes are 2,100 ft. apart.

Schools Lag; U. S. Aid Unlikely

"The nation is not moving fast enough to reduce the classroom shortage," says Arthur S. Flemming, Secretary of Health, Education and Welfare. Nevertheless, the Administration is holding out against any federal aid to school construction that will unbalance the budget.

Classroom construction in 1959-60 will hit about 62,700, 10.4% behind 1958-59, when 70,000 new classrooms were constructed. And '58-'59 was the first year since the end of World War II that school construction declined—2.9% from the previous year.

The number of classrooms needed to maintain an "adequate teacher-to-pupil ratio" has increased by 600, to 66,400. An "adequate" ratio, however is each state's estimate of the desired ratio—it ranges from 22 to 40 pupils to one teacher—there's no national standard.

"We have barely been building enough schools each year to take care of annual enrollment increases and to replace classrooms that have been abandoned," says Secretary Flemming. The wide gap between classrooms needed and classrooms available is not being narrowed.

Mr. Flemming's aides have been working on a "compromise" school construction bill with Democrats on the House Education Committee. They have agreed to limited grants for the first two years to school districts bumping up against legal debt limits.

But there is no yielding on the basic Administration stand: Federal contributions only to the extent of paying half the interest on schools bonds, spread out over 25 or 30 years.

The Democrats' program, as contained in the Murray-Metcalf bill, is for outright grants of more than $1 billion a year for several years. Democrats dismiss the Administration's compromise as "peanuts."

Any large-scale grant program would probably be vetoed by the President. Outlook is for another stalemate on school construction.

Elwyn Seelye Dies; Noted Structural Engineer, Author

Elwyn E. Seelye, structural engineer and an authority on concrete design and construction, died last week at the age of 75.

He was senior partner of Seelye, Stevenson, Value & Knecht, consulting engineers, New York City.

A 1904 civil engineering graduate of Cornell University, Mr. Seelye formed his own consulting engineering firm in 1912. Later he joined in partnership with other noted engineers. His firms were consultants on such a well known structures as the Thomas Jefferson Memorial, Washington, D. C.; addition to the British Museum, London; annex to the Congressional Library; and the 600-ft-dia radiotelescope now under construction at Sugar Grove, W. Va. They also designed many large military installations for the U. S. armed forces before, during and after World War II. These included Camp Shanks, Orangeburg, N. Y.; the air base at Fort Dix, N. J.; and Camp Kilmer, Stelton, N. J.

Mr. Seelye was the author of the three-volume "Data Book for Civil Engineers" and of numerous articles on structural engineering published in ENR.

He was one of the pioneers in the design of flat-plate concrete buildings and of composite (steel-concrete) construction for buildings. At the time of his death, his firm had just completed the design of the largest building to date of composite construction—a federal court building in Brooklyn, N. Y.

Mr. Seelye also was an authority on repair of deteriorated structures, and offered his knowledge freely to the engineering profession to secure more durable construction.

With great courage, he tackled difficult and complex assignments. And he did not fear writing on controversial engineering topics or discussing them in public. His concern always was to extend engineering horizons.

Around the Country . . .

• **Levitt offers stock**—Homebuilder William J. Levitt will offer to the public, 20% of the 2.9 million shares of Levitt & Sons, Inc., stock. Sale is for the account of Mr. Levitt; no funds will go to the company, according to a registration statement.

• **Experimental reactor plant** – The AEC has selected The Fluor Corp. of Los Angeles as architect-engineer for an experimental reactor plant for testing the use of organic fluids as reactor coolants. The $6-million plant will be located near Idaho Falls, Idaho.

• **Mobile River tunnel**—Tentative agreement has been reached among U. S., state, and city highway agencies for construction of a second vehicular tunnel under the Mobile River at Mobile, Ala. The new tunnel and the existing Bankhead Tunnel will constitute a link in the Interstate System.

• **Far West development**—A group of California builders has revealed plans for a $13 million complex of residential and commercial development on the south shore of Lake Tahoe, just over the Nevada line. The complex will include a 160-unit hotel, a 45-acre housing development, an office building, medical-dental building, specialty stores, and apartments.

• **Docks for trucks**—Edwards and Kelsey, New York City consultants, are making an economic and engineering feasibility study of two pilot sites for public off-street truck-loading docks in New York's truck-choked garment district.

• **More power to them**—Commonwealth Edison Co. of Chicago plans the biggest four-year expansion in its history starting this year. By the end of 1963, the electric firm expects to spend $370 million for generating plants, $320 million for transmission and distribution facilities and $10 million on general plants.

• **Northland grows**—H. L. Vokes Co. of Cleveland will design and build twin 12-story office buildings, estimated to cost $8 million, as part of Detroit's Northland Shopping Center.

• **College building program**—Loyola University, Chicago, will spend $29.3 million over the next decade in construction of six new buildings. The program includes a $10-million teaching hospital and $8-million science building.

• **West Coast cement plant**—The Flintkote Company has announced plans to build a $14-million cement plant at Redding, California.

Arizona Revises Colorado Plan

Arizona Power Authority has expanded by $58 million its plans for the Bridge Canyon-Marble Canyon hydropower project on the lower Colorado River (Arizona).

In a revised license application filed with the Federal Power Commission, the authority estimates the project cost at $347.3 million. In the original application, cost was set at $289.5 million.

Other principal changes include: Height increase of Bridge Canyon Dam from 450 ft to 480 ft; initial generating capacity increase from 780,000 kw to 820,000 kw; ultimate generating capacity increase from 1,390,000 kw to 1,470,000 kw. The revised application calls also for two additional silt-detention dams: Tolchico on the Little Colorado River and Moenkopi on the Moenkopi River, Wash.

The revised application had been anticipated for many months. Almost immediately after Arizona filed its original application (July, 1958), the Bureau of Reclamation announced changes in its water level recommendations for that stretch of the river and Arizona began consideration of a revised application to fit the new Reclamation data.

Now, the FPC is awaiting a similar, competing license application from the City of Los Angeles for the same stretch of river. Los Angeles has told the FPC informally that it will submit one shortly, and since such projects are usually consolidated in hearings anyway, the FPC probably will wait and schedule both applications for the same hearing.

Both Arizona and Los Angeles filed competing applications with the FPC for preliminary study permits back in 1957, and this battle has now moved forward into maneuvering for a license application. The Bureau of Reclamation, which once considered building Bridge Canyon as a $1-billion multipurpose project, has dropped entirely out of the picture.

Who Pays for What?

Senate-Cabinet exchange opens road finances fight

The annual battle over what's to be spent for federal highway construction and where it's to come from promises to be sharper than ever this year.

Sen. Harry F. Byrd (D., Va.), Chairman of the Senate Finance Committee, fired the first shot, a letter to Commerce Secretary Frederick F. Mueller.

Senator Byrd's letter asked for assurance that the Administration will stick to pay-as-you-go financing, suggested a reappraisal of the 90-10 payment formula and criticized highway design.

Senator Byrd regards as temporary the one-cent-a-gallon gasoline tax increase and the general revenue diversions to the highway fund that Congress authorized last year.

Secretary Mueller said his staff is investigating these points. He reminded Senator Byrd it was a Democratic Congress that legislated the current highway financing program.

Mr. Mueller avoided any specific references to another gas tax rise and the diversion of other-than-highway-user taxes to the highway program.

There are insistent rumors in Washington that the White House will ask Congress to raise the gasoline tax by another half cent to help pay for federal construction commitments (ENR Dec. 24, 1959, p. 17). This is expected to get little support from an election-year Congress.

Senator Byrd claims that the present law—under which the federal government pays 90% and the state 10% for Interstate highway building—is diverting state money from the ABC roads, which are financed on a 50-50 basis.

BPR Reduces Red Tape For Contract Lettings

A new ruling by the Bureau of Public Roads is expected to speed up advertisement of bids and award of contracts for federal-aid highway and bridge projects.

State highway departments no longer must get clearance from BPR before letting each contract if they stay within the bureau's quarterly obligation schedules. And states no longer have to maintain a special contract award schedule in keeping tab on federal aid they are to receive.

BPR placed the states on a dollar obligation schedule last October, when it started its contract control system. Each state had to maintain a separate schedule on contract awards in order to spread contracting further. This was to ease the dollar strain during the transition into the new system.

Bridges of new Ohio Freeway are double-protected against corrosion with...

PITTSBURGH X-L-O STRUCTURAL STEEL PRIMER

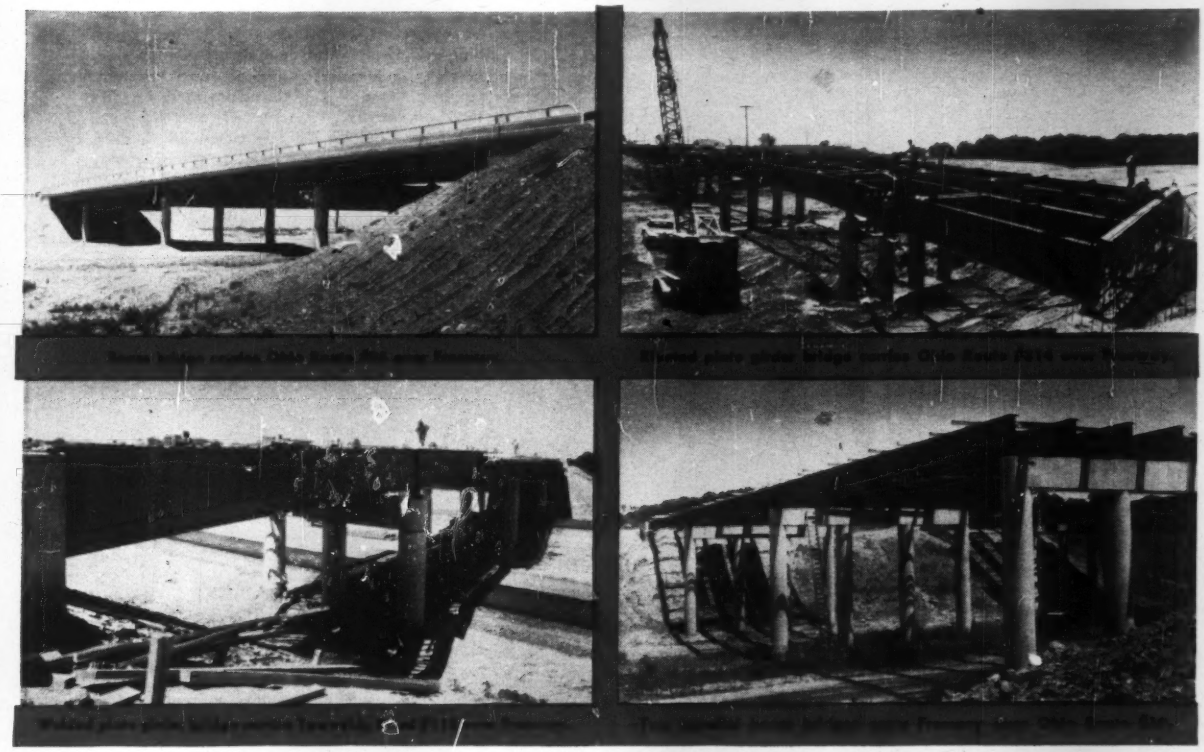

A series of bridges on the new North-South Ohio Freeway, Route #1, now under construction, is being double-protected against corrosion and film embrittlement with Pittsburgh X-L-O Structural Steel Primer. When completed, this highway—costing more than 200 million dollars—will extend from Conneaut to Cincinnati. It will be an important link in U. S. Interstate Highway No. 71.

• **Bridges for the Freeway** in Morrow County were designed by Porter, Urquhart, McCreary and O'Brien, Consulting Engineers of Newark, N. J. The Delaware County bridge was designed by Alden E. Stilson & Associates, Limited, of Columbus, Ohio. Steel for these structures was fabricated by The C. E. Morris Company of Columbus, Ohio.

• **By painting girders and beams** with X-L-O, these shapes were protected against corrosion during shipment and erection. Costly metal cleaning was eliminated. Uniform coverage was assured even over surface irregularities. Rapid drying made possible prompt shipment, regardless of weather.

• **X-L-O also serves** as an excellent foundation which aids final coats to resist damaging weather-wear. It is available in combination of red lead and iron oxide, or 100% red lead.

• **Why not call on us** for advice or suggestions to protect structural steel on your jobs? Write, wire or phone Pittsburgh Plate Glass Company, Industrial Finishes, 1 Gateway Center, Pittsburgh, Pa.

Watch the Garry Moore Show—CBS-TV—Tuesday evenings.

PITTSBURGH INDUSTRIAL FINISHES

PAINTS • GLASS • CHEMICALS • BRUSHES • PLASTICS • FIBER GLASS

PITTSBURGH PLATE GLASS COMPANY

IN CANADA: CANADIAN PITTSBURGH INDUSTRIES LIMITED

Keep full loads on the move full time with exclusive Planet Power-steering. Full power on both tracks, *full time*, is the answer! And Hi-Lo on-the-go power-shifting lets you match power to condition, instantly, and keep the yard-boosting advantage of uninterrupted momentum.

You speed-up all four steps of the push-loading cycle with TD-25 torque-converter and planetary system teamwork! 1) You slow down by power-shifting down and using decelerator to get feather-touch contact; 2) power-shift either track up or down to maintain solid pusher contact on curves; 3) get gear-higher kick-outs, with on-the-go power-shifting; 4) reposition faster, with higher-than-ordinary reverse! Two "25s" tandem-pushing the International 295 Payscraper®, and the third, scarifying, belong to contractor Ed Bentley, Sylacauga, Alabama — building superhighway near Birmingham.

PLANET Power-steering... HI-LO power-shifting... COME AS standard equipment ONLY in the new TD-25

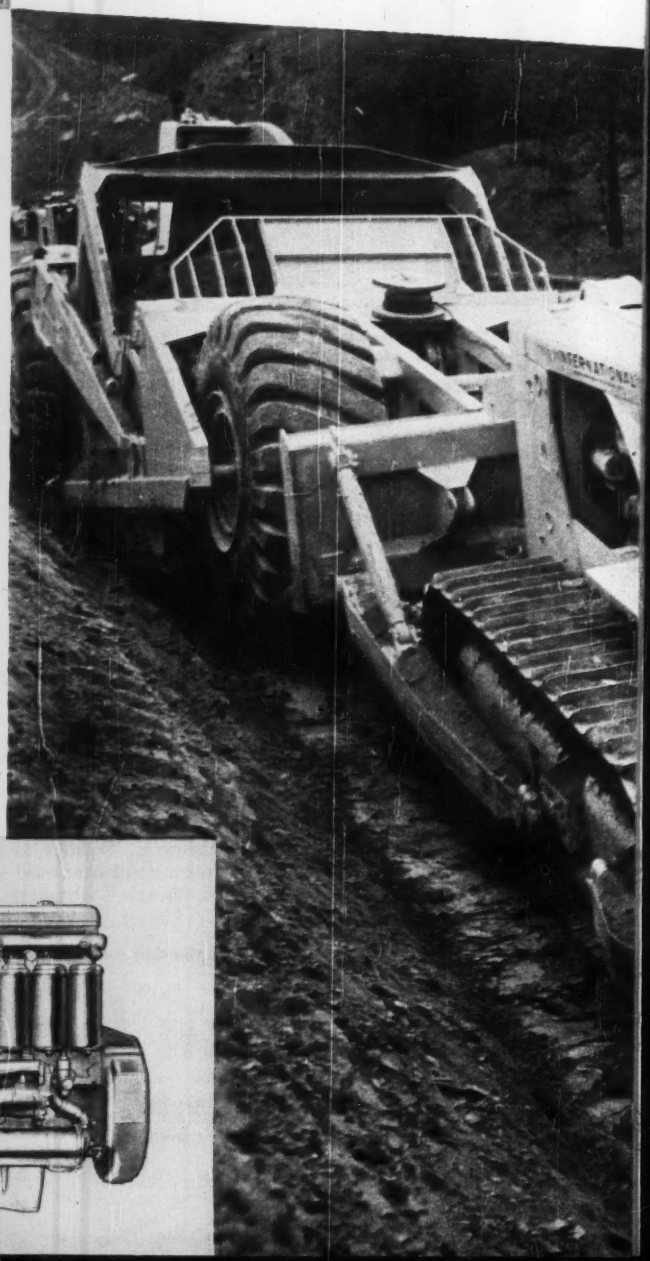

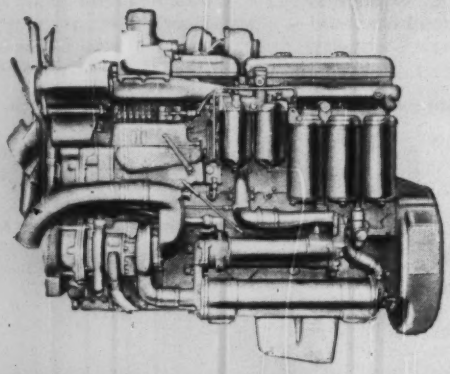

The International DT-817 engine—single power source used in both *pushers* and *scrapers*—an *industry first* in power standardization. You'll find this big new direct-start, 6-cylinder turbocharged diesel powering the full line of International two and three-axle Payscrapers; Paywagons®; and end-dump Payhaulers.® *Plus* the new TD-25! Dual valving of this high-torque, 230-hp power plant provides for peak turbocharging efficiency, to develop full power from sea level to timberline!

As standard equipment at no extra cost, the new 230-hp TD-25 gives you the International®-proven control combination that has been beating king-sized clutch-steered crawlers in yardage for years!

You get combined Planet Power-steering and Hi-Lo on-the-go, power-shifting exclusively in the new International TD-25. And you get this basic, built-in design advantage in your choice of torque-converter or synchromesh model!

With this and all its other big advantages, the TD-25 can outearn other big rigs up to 50%—on push-loading; and pulling big drawbar tools such as shale-shattering scarifers!

No "dead-track drag" or "gear-shift lag"! Planet Power-steering gives you full-time "live" power and traction on both tracks, to make full-load turns—and to eliminate load-limiting "dead-track drag." And Hi-Lo on-the-go power-shifting instantly matches power to conditions to prevent load-losing "gear-shift lag."

Hi-Lo power-shifting makes the TD-25 the industry's only 4-speed torque-converter crawler and the only one with load-matching efficiency-range control. In the synchromesh transmission "25," the Hi-Lo planetary system gives eight speeds forward and reverse—with cycle-speeding, up-or-down, on-the-go power-shifting with "finger-tip" ease!

Power-shift and power-steer the new "25" with full king-size loads—around curves, upgrade, anywhere. Prove what it means to command full-time, full-load ability to outearn clutch-steered king-sized crawlers, up to 50%. Measure all the "25's" standard equipment extra value features! See your International Construction Equipment Distributor for a demonstration!

***International*® Construction Equipment**

International Harvester Co., 180 North Michigan Ave., Chicago 1, Ill.

A COMPLETE POWER PACKAGE: Crawler and Wheel Tractors... Self-Propelled Scrapers and Bottom-Dump Wagons... Crawler and Rubber-Tired Loaders... Off-Highway Haulers... Diesel and Carbureted Engines... Motor Trucks... Farm Tractors and Equipment.

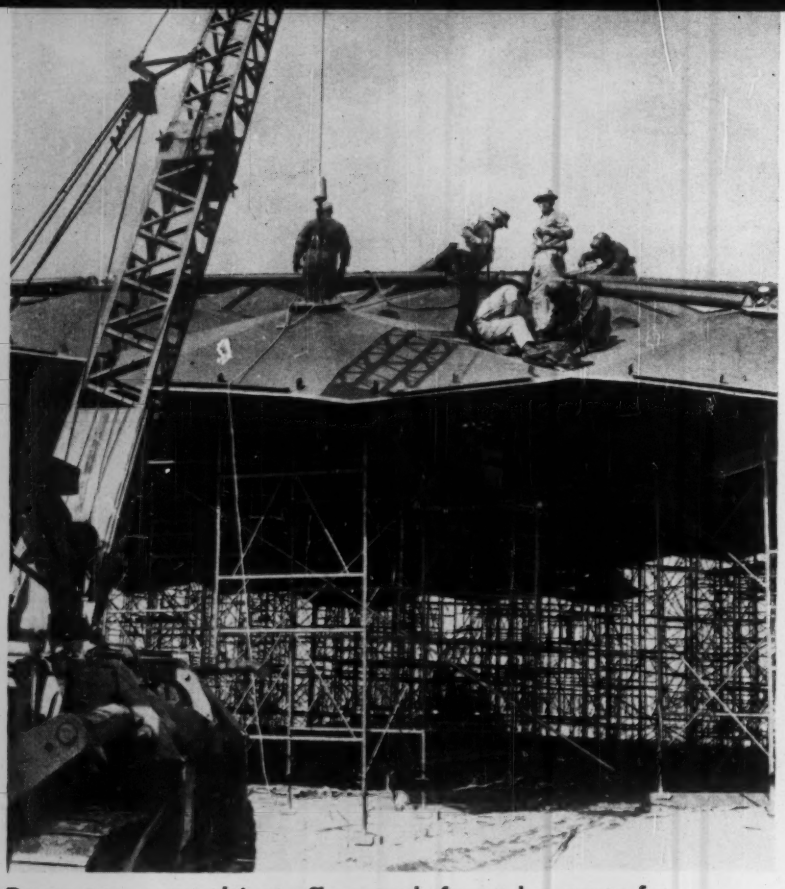

Dome top, erected just off ground, formed a cover for . . .

huge nylon curtain containing . . .

Building a Dome on Air, From

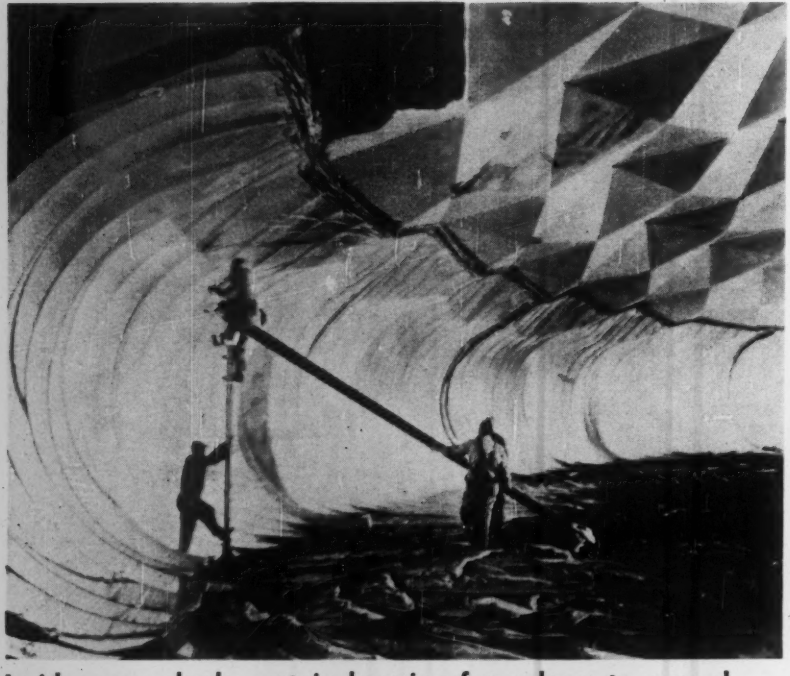

Inside, crew checks curtain hanging from dome to ground.

Outside, panel assembly was . . .

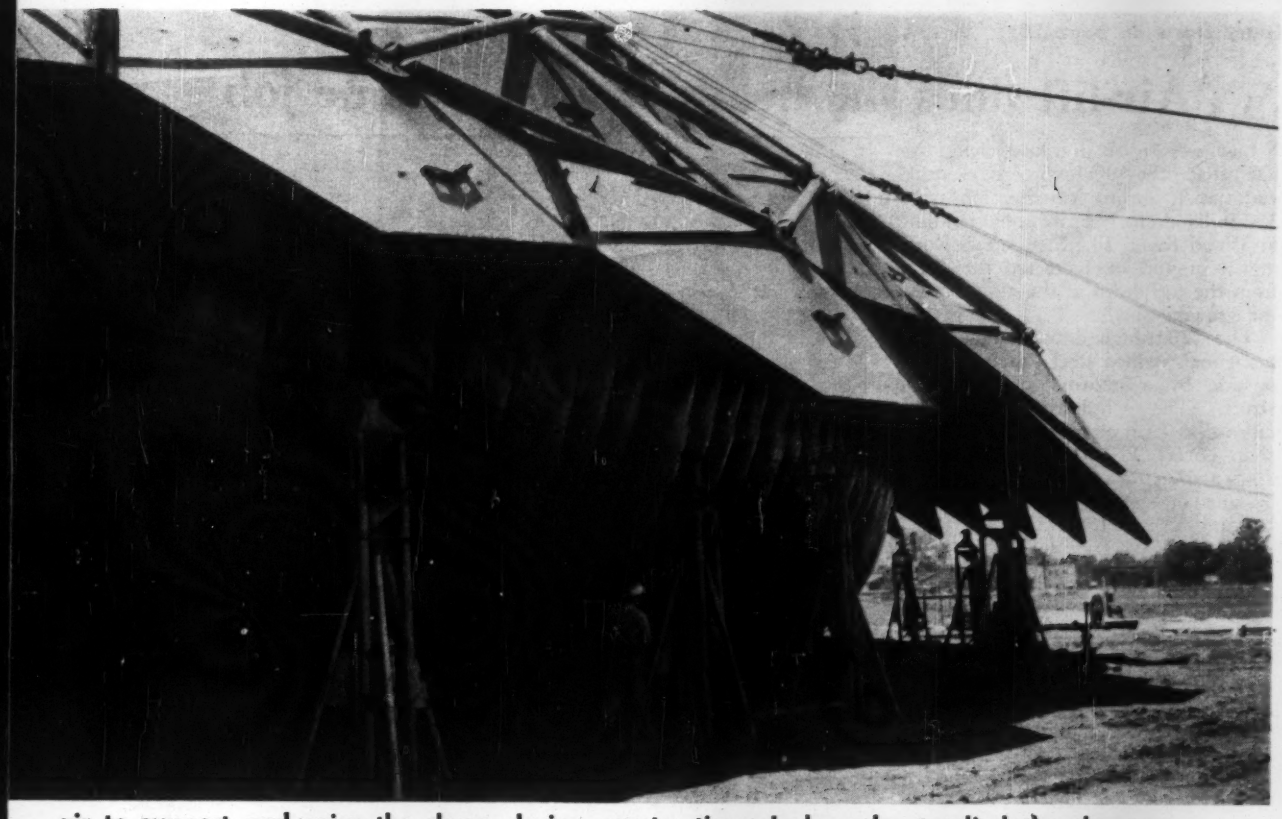

. . air to support and raise the dome during construction. Jacks only steadied the dome.

the Top Down

(story continues on next page)

. . . done at ground level.

Completed dome spans 380 ft. Erection took 250 working days.

(story starts on page 28)

. . . Air-lift does the heavy work on dome job

Low pressure air in a huge nylon bag has lifted over 500 tons of steel struts and panels during construction of a 380-ft-dia domed repair shop building in Wood River, Ill. Steel crews working at ground level erected the dome from the top down as the air-lift raised the growing shell.

The 120-ft-high dome contains 893 hexagonal, welded steel panels stiffened outside by a network of 6-in. pipe struts. The windowless building—a railroad tank car repair and maintenance shop—covers 110,000 sq ft of clear floor area. Graver Tank & Mfg Co designed, fabricated and erected the building for its parent company, Union Tank Car Co., Chicago.

This is the second dome-shop for Union Tank. The other was completed last year at Baton Rouge, La. (ENR Nov. 13, 1958, p. 34). The two are the same size and of the same general design. But erection methods were completely different. At Baton Rouge, crews erected the shell with long boom cranes from the outer edge up.

The air-lift system at Wood River worked like this:

Top center dome panels formed a lid on the circular, bulging skirt of nylon. Crews released the bottom edge of the curtain, gathered on the ground inside the dome and increased air pressure to lift the shell. There were 26 lifting operations during which the dome went up at the rate of 1 in. every 30 seconds.

Known as a pneumatic lifting diaphragm, the ½-in.-thick nylon bag was made to Graver's specifications by Domestic Film Products Corp., Millersburg, Ohio. Pneumatic erection operations of a similar nature have been carried out in the past, but this was the largest diaphragm and the biggest top-to-bottom construction project on record.

Construction began by welding together the top 220 panels—each roughly 15 ft across—on pipe scaffolding. The completed 200-ft-dia lid stood 30 ft off the ground at its center.

Once the lid was finished, workers attached the nylon diaphragm to the underside of the lid in a 175-ft-dia circle.

The ground formed the bottom seal for the diaphragm. Drawn in toward the center of the dome floor, it was fastened by ⅝-in. hemp rope to a 40-ft-dia holding ring of 4-in. pipe. Outside, the diaphragm was reinforced and restrained by a network of 326 ropes hung from the underside of the dome down the bag at 3-ft intervals and connected to its bottom, inside the edge.

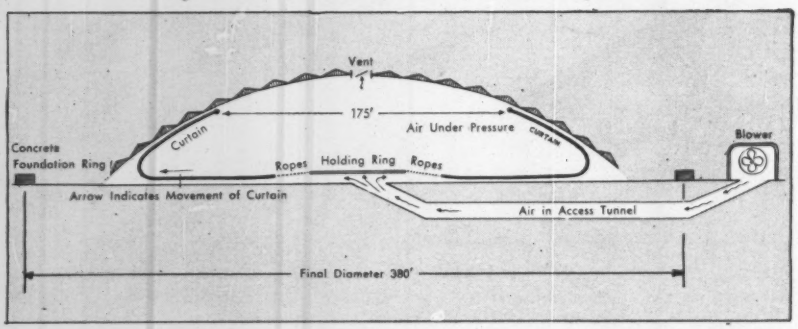

AIR PRESSURE was kept at 1.45 oz. per sq in. to support dome and was raised to 1.6 oz. per sq in. for each of the 26 lifts during construction.

Workmen shifted the dome weight from the scaffolding to a circle of hydraulic jacks placed under the outer panels before the bag was inflated. Then the scaffolding came out.

A 25-hp blower forced air into the lifting diaphragm through an underground tunnel at the rate of 20,000 cfm.

There were two blowers outside the dome. One served as a standby while the other delivered air through the 220-ft tunnel to an outlet at the center of the diaphragm's holding ring. The 4.5-ft-dia air tunnel, a steel plate culvert, also provided access to the interior of the dome for workmen through an airlock.

During panel erection, pressure was maintained at 1.45 ounces per sq in., only slightly above atmospheric pressure. At this pressure, 90% of the dome's weight was supported by air. The remaining 10% rested on the hydraulic jacks. These helped stabilize the dome and prevented it from "floating."

In addition to the jacks, 10 wire rope guy lines—attached to the dome by spreader lines at 120 points—prevented lateral shifting during high winds. The guys ran out to concrete deadmen 306 ft from the dome center.

Air pressure was controlled by a single 5-ft-dia vent at the top of the dome. It was spring loaded and opened toward the inside. If pressure surpassed 1.45 oz per sq in. and lifted the dome, a trip cable from vent release to the ground pulled taut. This opened the vent to let air out. The dome would then settle back, releasing the cable and closing the vent.

Engineers increased air pressure to 1.6 oz per sq in. for lifting operations. This was enough to raise the dome at any stage of construction, because as the dome weight increased, so did the bearing area of the air cushion underneath it.

Lift control was simple and direct. Before a lift, the cable from ground to vent was slackened the distance the dome would rise. This closed the vent and contained all the air until the new elevation was reached. Then the vent opened, halting the lift and signaling for a pressure drop.

Just before each lift, teams loosened the interior holding-ring ropes to let the bag out as well as up.

The restraining ropes on the outside kept the bag a safe distance from the outer, lower row of panels. This was a safety precaution, too, preventing panel welding from endangering the diaphragm.

Two balloons, 8 ft and 12 ft dia, were kept inside the bag as an emergency measure. In the event of serious diaphragm puncture they would be rushed into the opening to plug it. But they were never needed. Small punctures in the bag did occur, usually from some sharp object, but air escape was negligible and the holes were easily patched.

Once the dome was on its foundations, surveyors checked to determine any movement of the shell, either radially or vertically. The only appreciable dome movement—from full air support to complete self support—was in its center height, which settled a mere 1¼ in.

After welding the shell to the foundation ring, a 200-ft-long "finishing" tunnel was added to the dome. This tunnel will house sand-blasting and painting operations for railroad tank cars leaving the dome after repairs. The 20-ft-high by 40-ft-wide tunnel also is made of hexagonal steel panels. But it was erected from the ground up in a conventional manner.

Estimated total cost of the structure is less than $10 per sq ft of floor area.

BRIXMENT MORTAR
Is More Durable

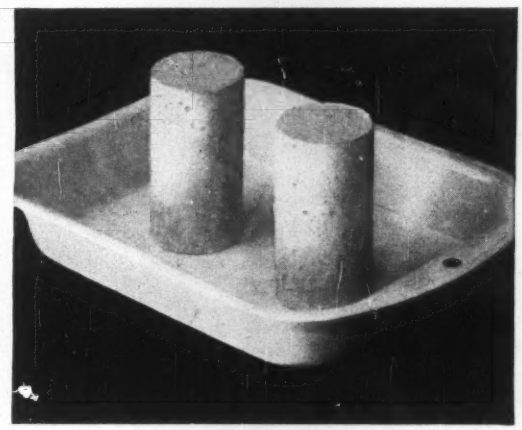

To compare the durability of Brixment mortar and ordinary cement-and-lime mortar, make a cylinder of each, let them "cure" for a month, then freeze and thaw them for forty or fifty times, with a little water in the pan (the freezing unit of your electric refrigerator will do). See the difference with Brixment mortar!

—AND DURABILITY MEANS PERMANENT STRENGTH AND BEAUTY

For permanent strength and beauty, mortar must be *durable*—must be able to withstand the alternate freezing and thawing to which it is subjected many times each winter.

Brixment mortar *is more durable.* This greater durability is due partly to the strength and soundness of Brixment mortar, and partly to the fact that an air-entraining water-repelling agent is incorporated into Brixment during manufacture. This helps prevent the mortar from becoming saturated — therefore protects it from the destructive action of freezing and thawing.

Walls built with Brixment mortar therefore *retain* their original strength and appearance — even parapet walls and chimneys, where exposure is particularly severe.

LOUISVILLE CEMENT COMPANY, LOUISVILLE 2, KENTUCKY

Cement Manufacturers Since 1830

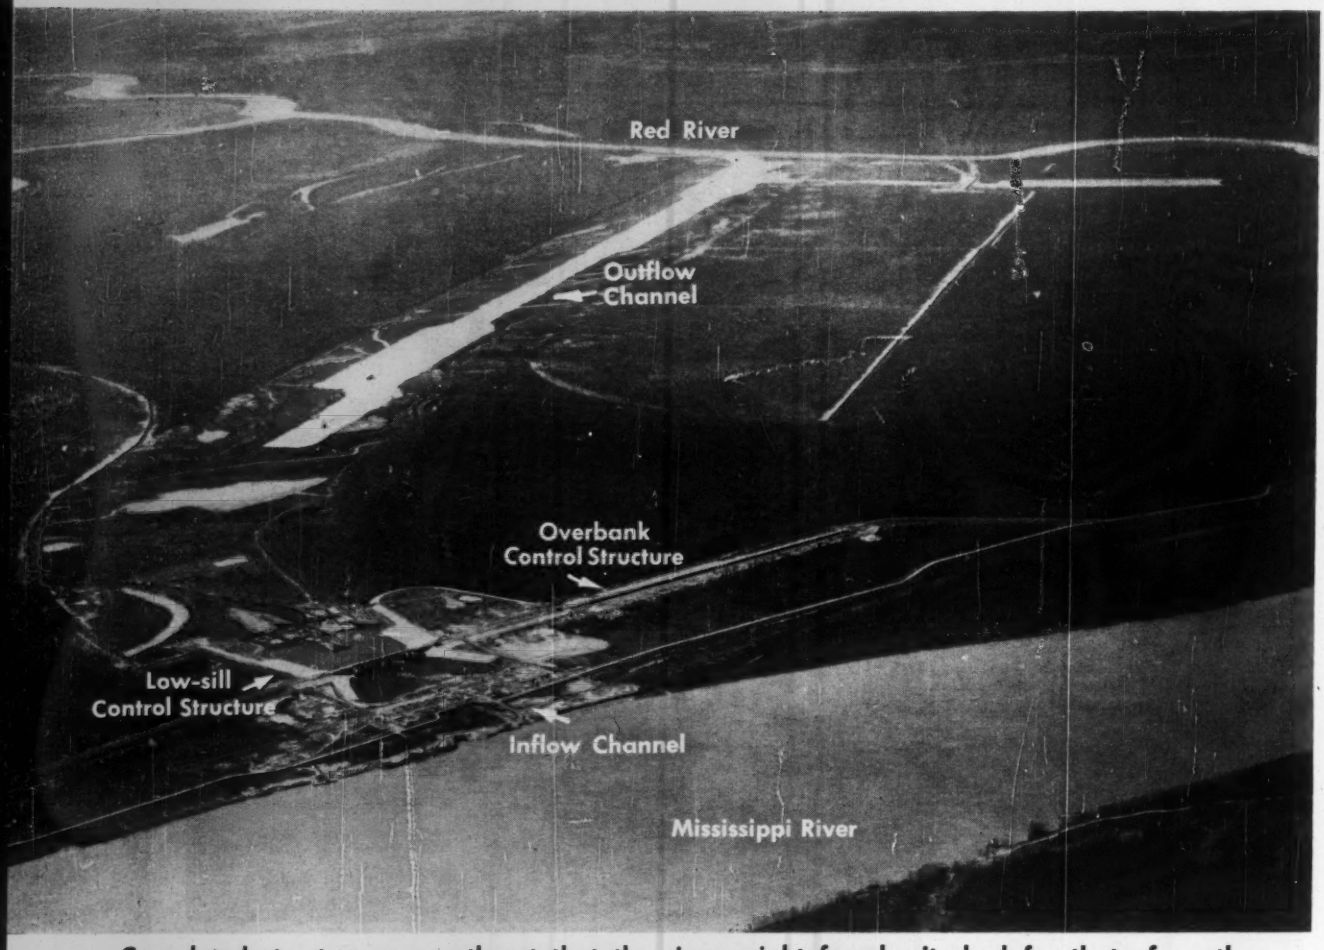

Completed structures erase threat that the river might forsake its bed for that of another.

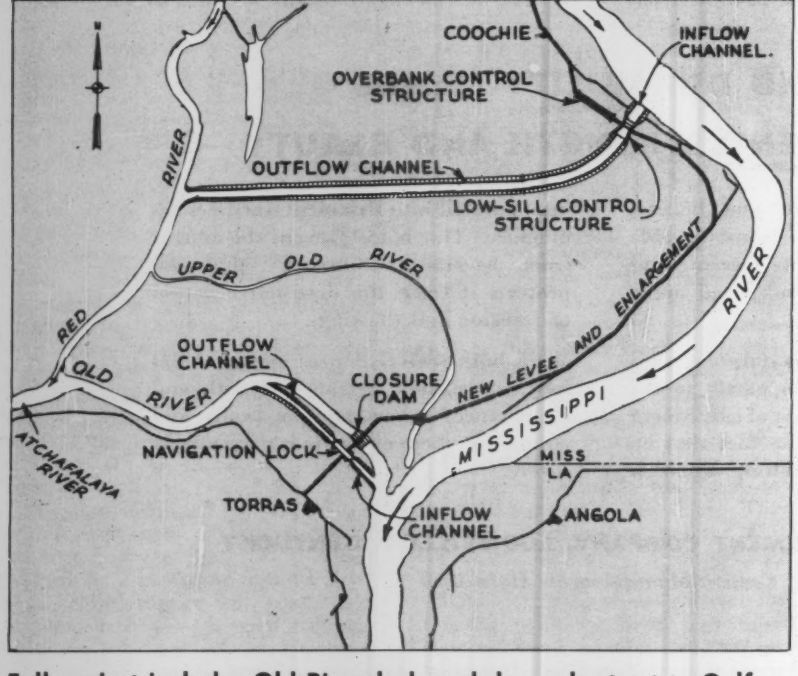

Full project includes Old River lock and dam, short-cut to Gulf.

New Control

Imagine a disaster of these proportions:

- The nation's second largest port—New Orleans—without its river.
- Salt water 230 miles up the Mississippi at Baton Rouge.
- A billion-dollar investment in new chemical, petrochemical and synthetic plants alone wiped out.
- Bridges, pipelines, railroads and cable crossings stranded.
- A major portion of the flood control plan for the Mississippi, in which $1 billion dollars has been invested, out the window.

Those threats were ended when Army Engineers recently completed the two key works—the low sill and overbank control structures—of the Old River Control Project near Angola, La. With these works in place and operable, Army Engineers now have the means to halt diversion of the Mississippi into the Atchafalaya River—a threat that had become increasingly serious.

Structures now stand ready to control spill, keep the Mississippi River where it belongs.

Dams Remove Threat to Ol' Miss

In the present incomplete state of the project, emergency action to halt the diversion would be on an improvised basis. But it would work. Some months ago (ENR Apr. 8, 1954, p. 36), this question was posed, "Will the Atchafalaya Capture Old Miss?" The answer is now, "No."

The $80-million Old River Control Project is about 40% complete with $30 million spent so far. Only the control works are finished, although impressive progress has been made on the supporting complex of channel dredging, levee building and the like.

Construction of a lock is just getting well started. Still four years off is the central feature that will pull the whole sprawling job into focus—a dam that will block Old River and thereby prevent the Atchafalaya from capturing the Mississippi.

But with the overbank and low sill structures available to handle Mississippi-Atchafalaya flows, Army Engineers can now, even without the dam, halt the diversion if it becomes imminent. They could quickly establish emergency measures to keep the Mississippi in its place. It is beside the point that the now-available measures would block barge traffic between the Atchafalaya and the Mississippi for a couple of years. What counts is that the continuance of an established way of life for the lower basin has now been assured.

This work and this threat are located in an area known to residents as the Three Rivers. Here, within six miles of each other, are the Mississippi, the Atchafalaya and the mouth of the Red. Interconnecting all three is a short length of a stream known as Old River. If the area is small, the implications are tremendous.

In this Three Rivers area there existed a situation familiar in Mississippi River history. The situation occurs when a nearby stream, offering a steeper gradient and a shorter route to the sea, sends a migrant meander loop to intersect the main river and become its distributary. Slowly at first and then at an accelerating pace as balance is upset, the distributary carries a larger and larger proportion of the main river's water, until finally, complete capture comes with a rush.

The Old River situation fit this classical pattern in all its details. Its trigger is a gradient of the Atchafalaya more than twice as steep as that of the Mississippi (it is 140 miles on the Atchafalaya from Old River to the Gulf near Morgan City as compared with 313 miles to the Gulf on the Mississippi via New Orleans).

Formerly, the Atchafalaya was a stream so inconsequential that old timers from habit still refer to the Three Rivers area as "the Mud Hole." The Old River was a two-way stream: When the Red was high, Old River flowed into the Mississippi; when the Mississippi was in flood, Old River reversed

its direction to flow into the Atchafalaya.

Now the consistent flow is from the Mississippi into the Atchafalaya. The volume has increased until the Atchafalaya has become one of America's largest rivers flowing into the sea.

Without the control works, the shift inexorably would go full cycle. Currently the Atchafalaya carries 27% of the Mississippi's annual flow. The threshold of the critical phase would have been reached when the proportion went up to 40%. Shortly thereafter the point of no return would have been passed and the diversion would have been beyond prevention. This shift could have occurred in 1968, was most likely to have taken place by 1975 and certainly would have happened by 1985. All of which gives point to the safeguard that became available with the control works' completion.

In dealing with the threat, Army Engineers had to consider the Atchafalaya's dual role. If the river is an instrument of potential catastrophe, it also plays a constructive role as a carrier of commerce and a tool of flood control. The Atchafalaya is a short cut that carries an increasing tonnage of oil and chemicals moving from Louisiana and Texas to upriver ports. More important is its role in time of flood. The Mississippi's projected flood at Old River's latitude is 3 million cu ft per sec. The lower Mississippi can carry only half of this. The Atchafalaya and its drainage basin are expected to dispose of all the remainder, with 700,000 cfs handled at Old River.

The conflicting attributes of the river determined the design and function of the complex of structures that make up the Old River Control Project. Each deals with a separate facet of the problem; together they work as a team to curb the river on one hand and to utilize it constructively on the other.

• **Low sill structure**—The function of this structure is to control, day by day, the flow of water from the Mississippi into the Atchafalaya. Of concrete construction, it is 560 ft between training walls, stands 80 ft tall and consists of 11 bays, each 44 ft between piers. Sill elevation of three of the bays was dropped to El −5 to permit flow into the Atchafalaya during extremely low water. For economy of excavation, the weirs of the other bays are at El 10. Control is with fixed-wheel roller-type gates. Four gates are stacked one atop the other in the low bays and three gates are used in the others. They are served by a gantry of 200-ton capacity. The whole structure is founded on H-beam piles with a maximum length of 130 ft, and a minimum penetration of 30 ft in sand, which is at El −60.

LOW SILL STRUCTURE is series of large flood gates. Tall steel falsework held forms for casting crane-rail beams along its top.

Constructed by the F & C Engineering Co. of Houston, the structure proper will cost about $10 million. This is exclusive of $650,000 for the steel gates and $260,000 for the gantry. The structure has a wide variation of capacity, ranging from record low flows to 350,000 cfs in time of flood.

• **Overbank structure**—The area interlaced by the Atchafalaya, Red and Ouachita rivers is a swampy wasteland with a spongelike capacity to absorb and retain flood water, which it later allows to escape at a harmless, leisurely pace. The overbank structure, which will function only in time of flooding, will spill the Mississippi's water into this great natural reservoir when bankfull stage is reached. Similar to the Morganza control structure in design, it is 3,356 ft long and has 73 bays, each 44 ft between piers. Control is by wooden needle-type gates, working on a hinge, that are served by two 15-ton gantries. The structure has a slab footing founded on natural soil, but no piling. It has a concrete cutoff wall on the upstream (Mississippi) side and gravity drains of 8-in. perforated pipe in each bay. Contract cost was $5.2 million. Construction was also by F & C Engineering Co.

• **Levee construction**—The sprawling nature of the project will require nearly 18 miles of levee to safeguard it. All but four miles of this is enlargement of existing levee. Minimum fill height required will be 20 ft while maximum will be around 60 ft; the yardage involved totals 5.3 million. Two miles of the levee was placed by the F & C Engineering Co. with spoil from control structure excavation. Another stretch of the levee work was contracted to the Atlas Construction Co. of Vidalia, La. Total levee cost will be in the $2 million to $3 million range.

• **Outflow channel**—Function of this channel, on which a dredge has been chewing away for nearly 2½ years, is to lead water overland from the low sill structure to the Red River (from there it moves into the Atchafalaya). This channel, roughly paralleling Old River and about 10 miles from it, is seven miles long. Quantity to be removed is 67 million cu yd. The channel is to have a 900-ft bottom width with side slopes ranging from 1 on 4 to 1 on 8. About a third of the channel runs through an area of highly erodable silt.

In this reach the dredged section is being held to pilot-channel width of 450 ft in the expectation that the flow of water will enlarge the channel to full cross section. It is estimated that 12 million cu yd of dredging will be saved by this wrinkle. Dredging is in six items, all of which went to the McWil-

ABRASIVE, FLY-ASH-LADEN WATER

no problem for a MARLOW!

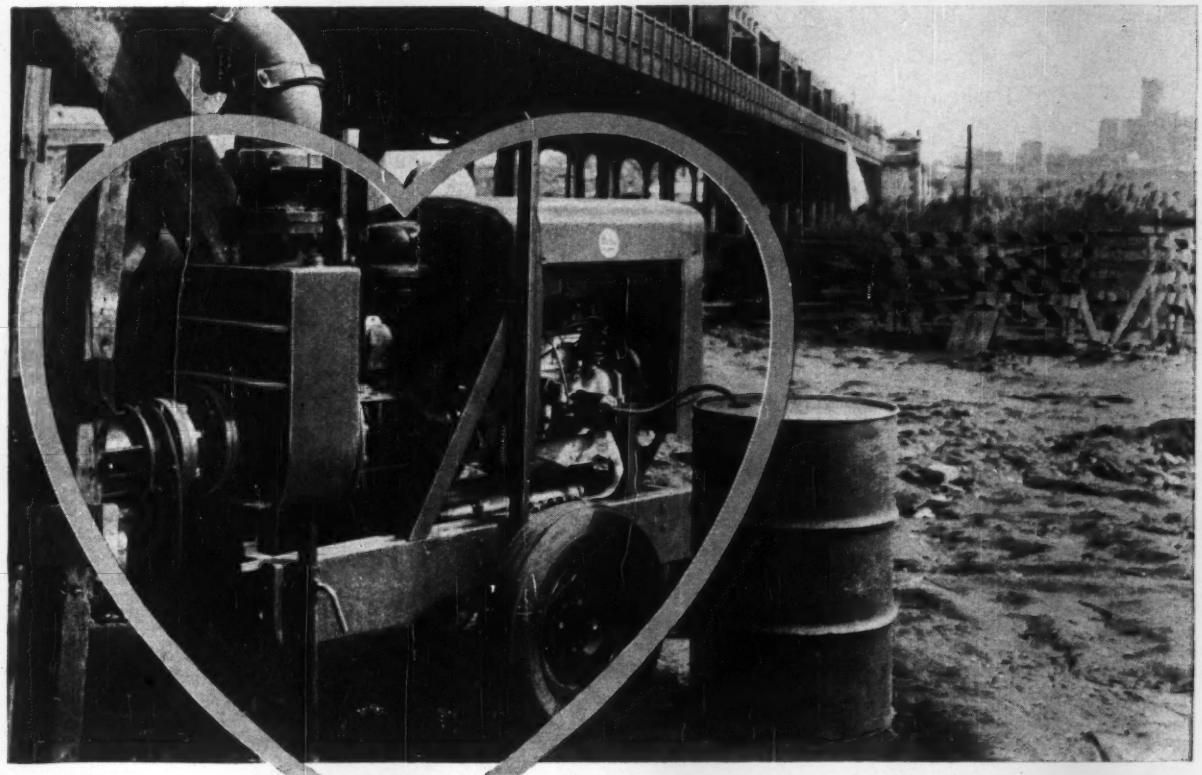

The **HEART** *of any solution*
to seepage water **IS THE PUMP ON THE JOB!**

The Roosevelt Avenue Bridge, over the Flushing River in Flushing, New York, carries trains of the city's transit system, as well as heavy highway traffic. Recently, it was noticed that the structure was sinking, endangering both highway and train travel. To correct this, a contract was issued by the Department of Public Works of the City of New York to the Woodcrest Construction Company for the reconstruction of the West approach to the bridge.

When the two-decked structure was originally built, it used wood piles sunk 70 feet below grade. As the ground on the site is mostly filled with fly-ash from incinerators, new steel piles were driven to between 100 and 120 feet below grade to properly support the new bridge abutments.

Seepage from the nearby river became a very serious problem when digging excavations for the abutments. In addition, the abrasive nature of the fly-ash fill could cause trouble to the pumps. To solve *both* problems, Ed Good, General Superintendent for Woodcrest, set up a 6E4 Marlow Contractors Pump. Running six hours a day, this 90,000 GPH, self-primer, sold by Foundation Equipment Co., completely controlled the onrushing water. The 360° cleaning action of the Marlow kept the casing clean and, because there were no close clearances in the pump to wear, the abrasive liquid caused no trouble in the units. Ed Good had used Marlows for some time and *knew* they would perform without trouble.

Marlows can help solve your construction pumping problems. There's a unit from Marlow's complete line of self-priming and diaphragm pumps that's just right for your job. Write today for the name of your Marlow dealer and a copy of Marlow Contractor Pumps Bulletin C-09.

Marlow PUMPS

MARLOW PUMPS
DIVISION OF BELL & GOSSETT COMPANY
MIDLAND PARK, NEW JERSEY
Morton Grove, Illinois • Longview, Texas

9-479

. . . Old River control now assured, lock and dam come next

DREDGE EXCAVATES FOR LOCK which is now under construction. In background is Mississippi; to the left flows Old River, which will be dammed here.

liams Dredging Co. of New Orleans. Dredging contract total to date is $11.1 million; estimated total dredging cost, including the inflow channel, is near $15 million.

• **Old River dam**—This hydraulic fill structure, on which work is to begin in 1963, has been saved for last so that navigation will not be impeded. During the winter high-water season an underwater rock sill will be constructed to El 20 across Old River. (Rock, incidentally, is a scarce commodity in alluvial Louisiana; the 200,000 cu yd of derrick stone used downstream from the control structures were barged 715 miles on the Tennessee, Ohio and Mississippi rivers from Smithville, Ky.) In the spring, the control works will take over the flow, and dam embankment proper will be placed by dredge on top of the rock sill. The section will be about 100 ft high and will be placed as an integral part of the levee ringing the project on the Mississippi side.

• **Lock**—The $14.7-million contract awarded Brown & Root of Houston for the lock's construction was the largest single contract in the New Orleans District's 92-year history. Construction is just getting well under way, although preliminary dredging was carried out previously. The lock, 1,200 x 75 ft, will have walls of the substantial height of 80 ft—made necessary by the extent of the river's fluctuation—but the lift will not exceed 37 ft. The Old River lock (and the Port Allen lock near Baton Rouge, now nearing completion) is unusual in that it is not founded on piling but is supported by the underlying silt and sand. The two locks are, in effect, drydocks are set on silt and on sand.

This design necessitates precautions against uplift and deflection both during and after construction.

Concrete placement is carefully spelled out. The 12.5-ft thick base slab is placed in three lifts, each 22 to 24 ft long and extending the full width of the lock. To keep weight spread after a monolith is placed, the next vertical lift must await the placing of the two adjacent base monoliths. Thus the top lift would be the apex of a triangle with a base five monoliths wide. The walls at either side have to come up simultaneously to hold weight even.

Similar care is required in foundation preparation. Material under the base slab must be uniform in make-up. That is no problem, since the lock goes 20 ft into a sand stratum—undefiled by any lenses of foreign material—that extends clear down to the tertiary clays. Both the sand and impervious soil have to be brought to optimum density where preseribed. With the sand, this will be achieved by flooding and walking the sand with tractor type equipment. Tamper-type rollers will be used to achieve density of the impervious clays.

The weight of the structure and the supporting ability of the sand are carefully balanced. Extensive precautions are taken against uplift. A steel sheet-pile cutoff on the Mississippi side will discourage seepage, as will impervious clay blankets at the sides. Sand will be wrapped around the lock walls so that groundwater will go up and down with the water in the lock itself to minimize hydraulic pressure.

Deep wells will ring the lock to dewater the area while work is going on. There will be 37 wells in all. The effectiveness of wells for this purpose was demonstrated by their use on the low sill structure. Thirty wells were sunk into the deep sands that underlie the low sill structure at El −60. The 8-in. wells went down to El −122 with 30-ft screens. Maximum amount of water pumped was 13,500 gpm. On the lock it is expected to be 30,000 to 40,000 gpm. During the sill structure's construction, maximum stage in the Mississippi was 52 ft above MSL.

• **Many benefits**—Aside from the direct benefits of the project itself, the Old River job will bring a substantial auxiliary gain to that area of Louisiana. The control structures were designed for a 12-ft top. The State of Louisiana financed the cost of broadening the top's width to carry a 26-ft roadway. It will pay for thickening the levee section to have a 40-ft crown and for holding curves to highway standards. State Highway 131 will be routed over the levee and control works to provide access for an area that has lagged economically for want of roads. The highway will provide a 55-mile route connecting the Natchez-Vidalia area at one end and the Simmesport-Morganza-New Roads region at the other. As things now stand, residents must make a 150-mile trip through Baton Rouge on the opposite side of the Mississippi to get from one region to the other.

The Old River project is being carried out by the Mississippi River Commission with the New Orleans District of Army Engineers in direct charge. Adolph Hedegaard is project engineer for Army Engineers; C. B. Johnson is assistant project manager in charge of structures; C. C. Cassels is assistant in charge of dredging, levees and revetments. Contractor supervisory personnel were Frank Mitchell for F & C, J. E. Quillen for Brown & Root, V. J. Flynn and E. L. Hendry for McWilliams and W. E. Johnson for Atlas.

Ingalls fabricates and erects over

$3 MILLION

worth of structural steel for . . .

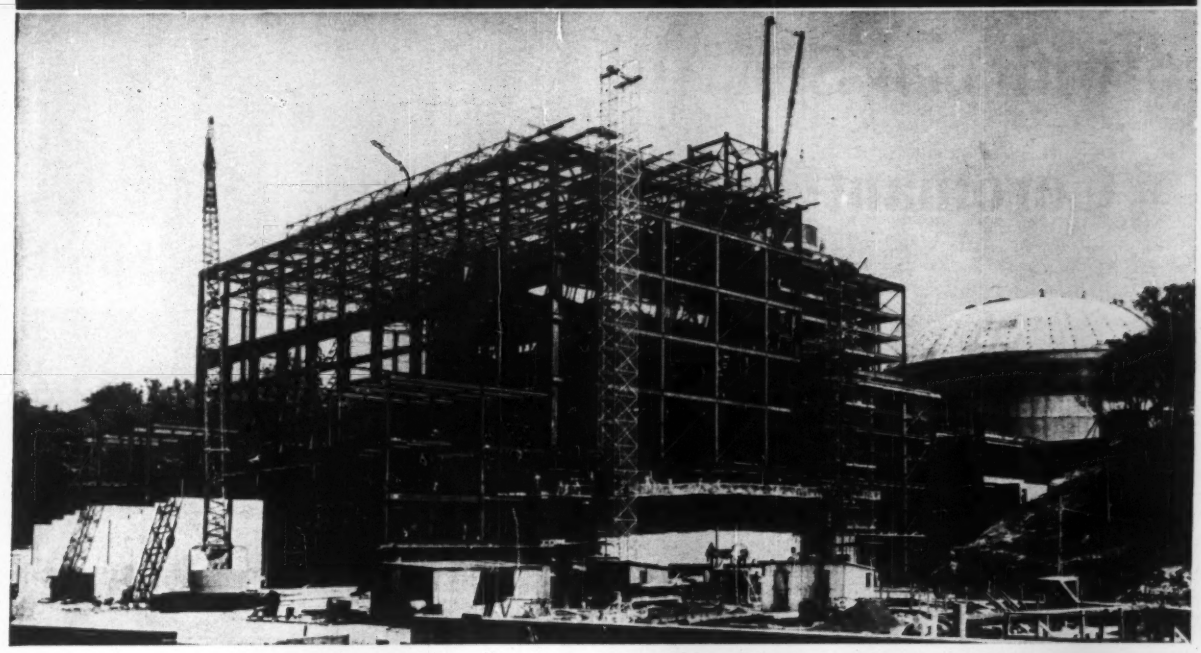

CON EDISON'S $100 MILLION *nuclear power plant*

On the banks of the Hudson, some 35 miles north of New York, a gigantic development of the nuclear power plant of tomorrow is taking shape today. Scheduled for completion in 1961, this $100 million investment in nuclear power technology will benefit the entire industry and the customers it serves.

Almost 8,000 tons of structural steel for Con Edison's 275,000-kilowatt Indian Point plant was fabricated and erected by Ingalls. The superheater and turbine room section required 6,000 tons of structural steel . . . and 2,000 tons were fabricated and erected inside the nuclear containment sphere, shown on the right of photo above.

Ingalls' skill, ability and experience with fabricated steel have been employed on many power plant jobs, including the construction programs of 46 of the nation's leading power companies.

If your company is considering a new power house, or expansion of present plants, you will do well to investigate Ingalls' facilities. Write us today.

STEEL PLATE FABRICATORS ASSOCIATION FOUNDED 1933

AISC AMERICAN INSTITUTE OF STEEL CONSTRUCTION INC. FOUNDED 1921

THE INGALLS IRON WORKS COMPANY
BIRMINGHAM, ALABAMA
Plants at Birmingham, Ala. and Verona, Pa.

Ingalls Industries are/ The Ingalls Iron Works Company, Sales Offices: New York, Pittsburgh, Chicago, Houston, New Orleans, Atlanta • **The Ingalls Steel Construction Company,** Sales Offices: New York, Chicago, New Orleans, Pittsburgh, Houston, Atlanta • **Birmingham Tank Company,** Sales Offices: New York, Pittsburgh, Chicago, Atlanta, New Orleans, Pascagoula **The Ingalls Shipbuilding Corporation,** Shipyards: Pascagoula, Mississippi; Decatur, Alabama Sales Offices: New York, Chicago, Washington, Houston, New Orleans, Atlanta

Longer bit life— with *new* Sandvik Coromant Bits



Sandvik Coromant Tungsten Carbide (Microphoto) Uniformity of size, even distribution of grain are marked. Free from porosity and impurities —therefore stronger, longer-lived.

Low quality Tungsten Carbide (Microphoto) Black marks are contaminations caused by deficient production control. They weaken the carbide, reduce its working life.

Sandvik Coromant Detachable Bits are Available in the following Thread Sizes and Bit Diameters

Type	Thread	Available Diameters, in Inches														
		1¼	1⅜	1½	1⅝	1¾	1⅞	2	2⅛	2¼	2⅜	2½	2¾	3	3½	4	4½	5
SHOULDER	TAPER	x	x	x	x													
	F		x	x														
	113		x															
	H			x	x	x	x	x		x								
	115			x	x													
	D						x	x	x	x	x	x	x	x				
	K													x	x	x	x	
BOTTOMING	1" Rope				x	x	x	x		x								
	1¼" Rope						x	x	x	x		x		x				
	400						x	x		x		x						
	1½" Rope											x	x	x	x	x		
	600											x	x	x	x			
	700													x	x			
	J7.5															x	x	
	2" Rope														x	x	x	x
	1000																x	

NEXT time you buy bits, specify Sandvik Coromant because they give more footage per bit, lower drilling costs. Here's why:

1 Only first-quality tungsten carbide is used —as shown in the microphotos above. This means less wear, longer life and a better job.

2 The bodies are precision-made of high quality alloy steel—tough enough to take the strain throughout the extra-long bit life.

3 The bigger Sandvik Coromant bits are all of X-design, which prevents rifling. No wonder Sandvik Coromant inserts are the most widely used in the world, drilling more than one billion feet every year.

SANDVIK COROMANT bits are supplied through Atlas Copco, the world's largest manufacturer of rock drills, who also supply Sandvik Coromant integral steels — the most widely used in the world — and Sandvik Coromant extension steel equipment.

Write or phone today for further details to either of the addresses below:

610 Industrial Avenue
Paramus, New Jersey
COlfax 1-6800

Atlas Copco

930 Brittan Avenue
San Carlos, California
LYtell 1-0375

Building Over Coal Mine . . .

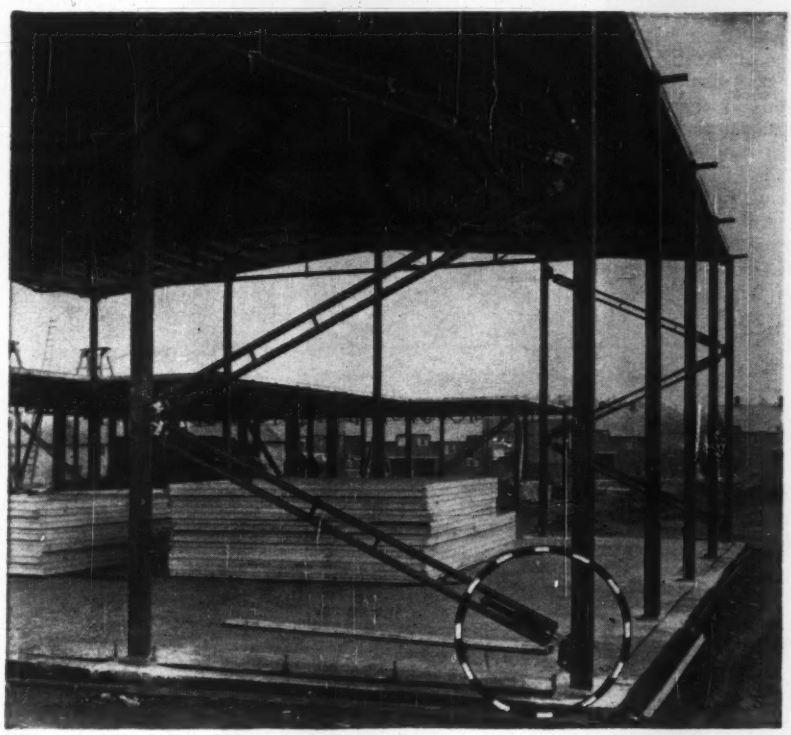

. . . Yields as Ground Settles

How do you support a building erected on subsiding soil? That was a problem faced in the coal mining center of Nottinghamshire County, England.

Most of the county's school buildings had to be located in mining areas. Ground subsidence sometimes stretched the earth's surface 4 in. per 100 ft horizontally and settled differentially several inches.

Efforts to design rigid superstructures on stable, deeply-excavated foundations had failed.

County designers, trying a different approach to the problem, provided for horizontal and vertical movements separately:

- A flexible structural frame adjusted the building to vertical settlement.
- A slab-on-ground resisted horizontal movement and allowed subsiding soil to slide under the structure.

The major requirement was to keep the steel columns parallel under all conditions. If this were not done, the frame joints could lock and fail to accommodate future movement.

The answer was to hinge the column bases on pins grouted into the ground floor slab. Diagonal members with hinged joints and stiff springs at each end, (see photo) brace intermittent bays for lateral loading.

Under wind loading these braced bays remain rigid. But under the tremendous force of earth subsidence the springs yield, and the frame takes a new shape. Spring tension then holds the frame in its new position until the inertial forces of subsidence act again.

The ground floor slab was designed to act like a sheet of paper—flexible but tension resistant. Construction joints were painted with bitumen. This allowed rotation at the joints, permitting the slab to follow contours of the settling subsoil.

Continuous welded wire fabric in the center of the slab on grade resists the tensile force of soil sliding under the slab. Experience in the area has established 180 ft as a practical economic limit for tension reinforcement of ground-floor slabs.

The flexible frame posed formidable problems in designing exterior walls, partitions and windows.

General solution for walls was to allow panels to overlap at horizontal joints. Joint details were varied to suit the different materials in use (e.g. tile, precast concrete, and steel panels).

Precast gypsum partitions, being rigid, are connected to columns with flexible joints.

Side-hung windows, designed with necessary tolerances, performed better than other types in tests. A test window, 10 ft wide, went 3 in. vertically out of square, but its fixtures still worked.

Test of a two-story frame unit confirmed the new approach before its use in construction. Screwjacks mounted under columns forced them 4 in. out of horizontal alignment. The springs pulled the building back into plumb after movement stopped.

The flexible buildings have performed so well that their use has spread to South Wales and other English communities with similar soil problems, according to W. D. Lacey, Architect to the Nottinghamshire County Council.

In the field of

HYDRAULIC DREDGING

GAHAGAN

a leading name for over 50 years

Gahagan Dredging Corporation, 90 Broad St., New York 4, N. Y. Write, wire or phone Whitehall 3-2558. Cable "Walgahagan".

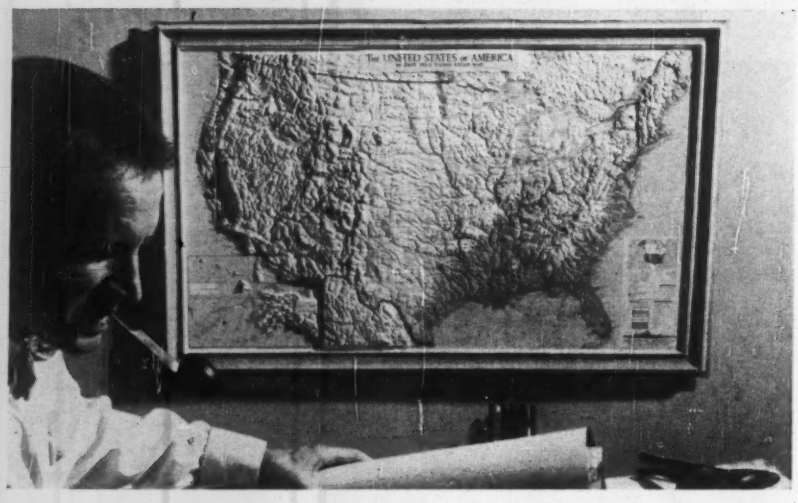

Small Relief Maps in Plastic

Aero Service Corp., Philadelphia, is offering plastic type relief maps of the World and the U. S. in the new small size of 28x18 in.

Best known for its worldwide operations in aerial surveying, the company has previously made a large (64x40 in.) plastic relief map, of which these new maps are accurate copies. The small maps, mounted in wall frames, contain a pull-out index that locates all of the place names shown. They cost $9.95 each, compared with $47.50 for the larger size.

The new maps are printed on a vinyl plastic, durable enough to stand the roughest handling. They are also plastic coated to protect the colors against dirt. Mountains and valleys on the maps are detailed in relief that reaches a maximum of about ¼ in.

The U. S. map, showing all fifty states, contains 4,000 geographic names —cities, rivers, mountains, etc.—on a scale of 1 inch equals 117 miles. The World map, with about 2,500 geographic names, has a scale of 1 inch equals 962 miles.

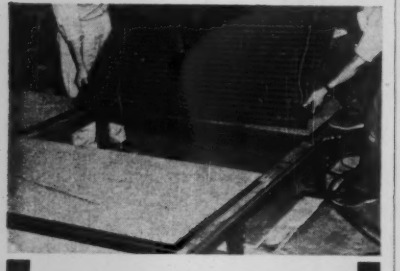

COMPARE

ELEVATED FLOOR SYSTEMS FOR COMPUTERS BY

ITEECO

Economy, availability, experience and qualified engineering. Accomo-Dek® by ITEECO is made in steel and extruded aluminum.

Call, write, wire

ITEECO

INDUSTRIAL TUBULAR EQUIPMENT COMPANY

12906 Saticoy, North Hollywood, Calif.

Phone TRiangle 7-9821

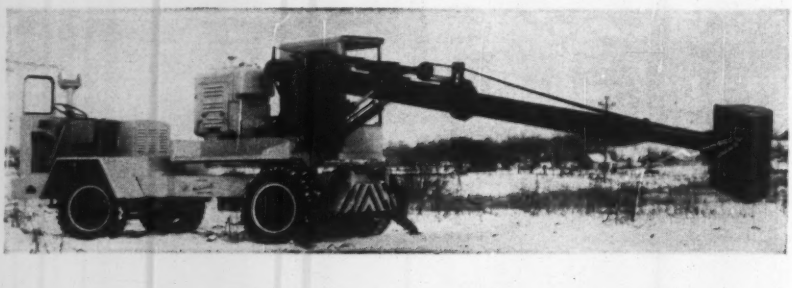

Versatile Hydraulic Excavator

A self-propelled, two-engine hydraulic excavator combines over-the-road speed with on-the-job maneuverability. The machine has travel speeds up to 40 mph.

On the job, a declutch in the drive shaft permits coupling of hydraulic drive for remote control from the operator's cab at the rear of the unit. Steering, forward and reverse travel, and setting of hydraulic outriggers can be accomplished from the rear cab. The upper works revolve 360 deg.

Standard attachment for the unit is the Hydra-Scope, with a telescoping boom that has a reach of 20 ft from center of swing with a telescoping action of 7 ft. The end attachment can be rotated 90 deg either side of centerline of the boom. Bucket capacity is ⅜ cu. yd. All operations of the upper mechanism are hydraulically controlled. Telescoping crane and backhoe booms are also available, as are other end attachments. DAVIS ENGINEERING, INC., P O Box 127, DOWAGIAC, MICH.

MAXON Dumpcrete Spreaders

paid their own way in paving savings on projects across the country last season!

Central Contracting Company
Rapid City

C. F. Replogle Company
Circleville

L. Zimmerman & Sons, Inc.
Hillside

Wilson Contracting Company
New Castle

O. W. Swanson Construction Co.
St. Paul, Minnesota

Broman Construction Company
Clarion

Tufano Contracting Company
Babylon, Long Island

C. J. Langenfelder & Son, Inc.
Baltimore, Md.

Here's proof of acceptance—proof that Maxon Dumpcrete Concrete Spreaders can sharply reduce paving costs with their "90-seconds-from-truck-to-slab" cycle. This is just a partial list of leading contractors who used the Dumpcrete Spreader last season. Most took full advantage of the benefits of central-mixing by using Dumpcrete Bodies . . . some used transit-mix trucks.

But the Dumpcrete Spreader paid off both ways. It can for you, too. It spreads, moves and strikes-off a 5½ cu. yd. load in *30 seconds.* (Dumpcrete Bodies load it in 60 seconds.) Places base course, top course or full depth. Paving widths are adjustable from 11 to 16 or 20 to 25 feet. Handles concrete of lowest slumps. Simple design and rugged construction hold maintenance to a minimum.

Find out how Dumpcrete Spreaders can cut costs for you on highway, street, runway or widening jobs. Send now for literature—or call your Dumpcrete distributor.

MAXON

Dumpcrete Hauling Bodies
and
Dumpcrete Paving Spreaders



MAXON CONSTRUCTION COMPANY, INC.
Manufacturing Division E-1 • 2600 Far Hills
Dayton 19, Ohio

Please send me new Dumpcrete Spreader catalog with specifications

NAME _____

TITLE _____

FIRM _____

ADDRESS _____

CITY _____ ZONE ___ STATE ___

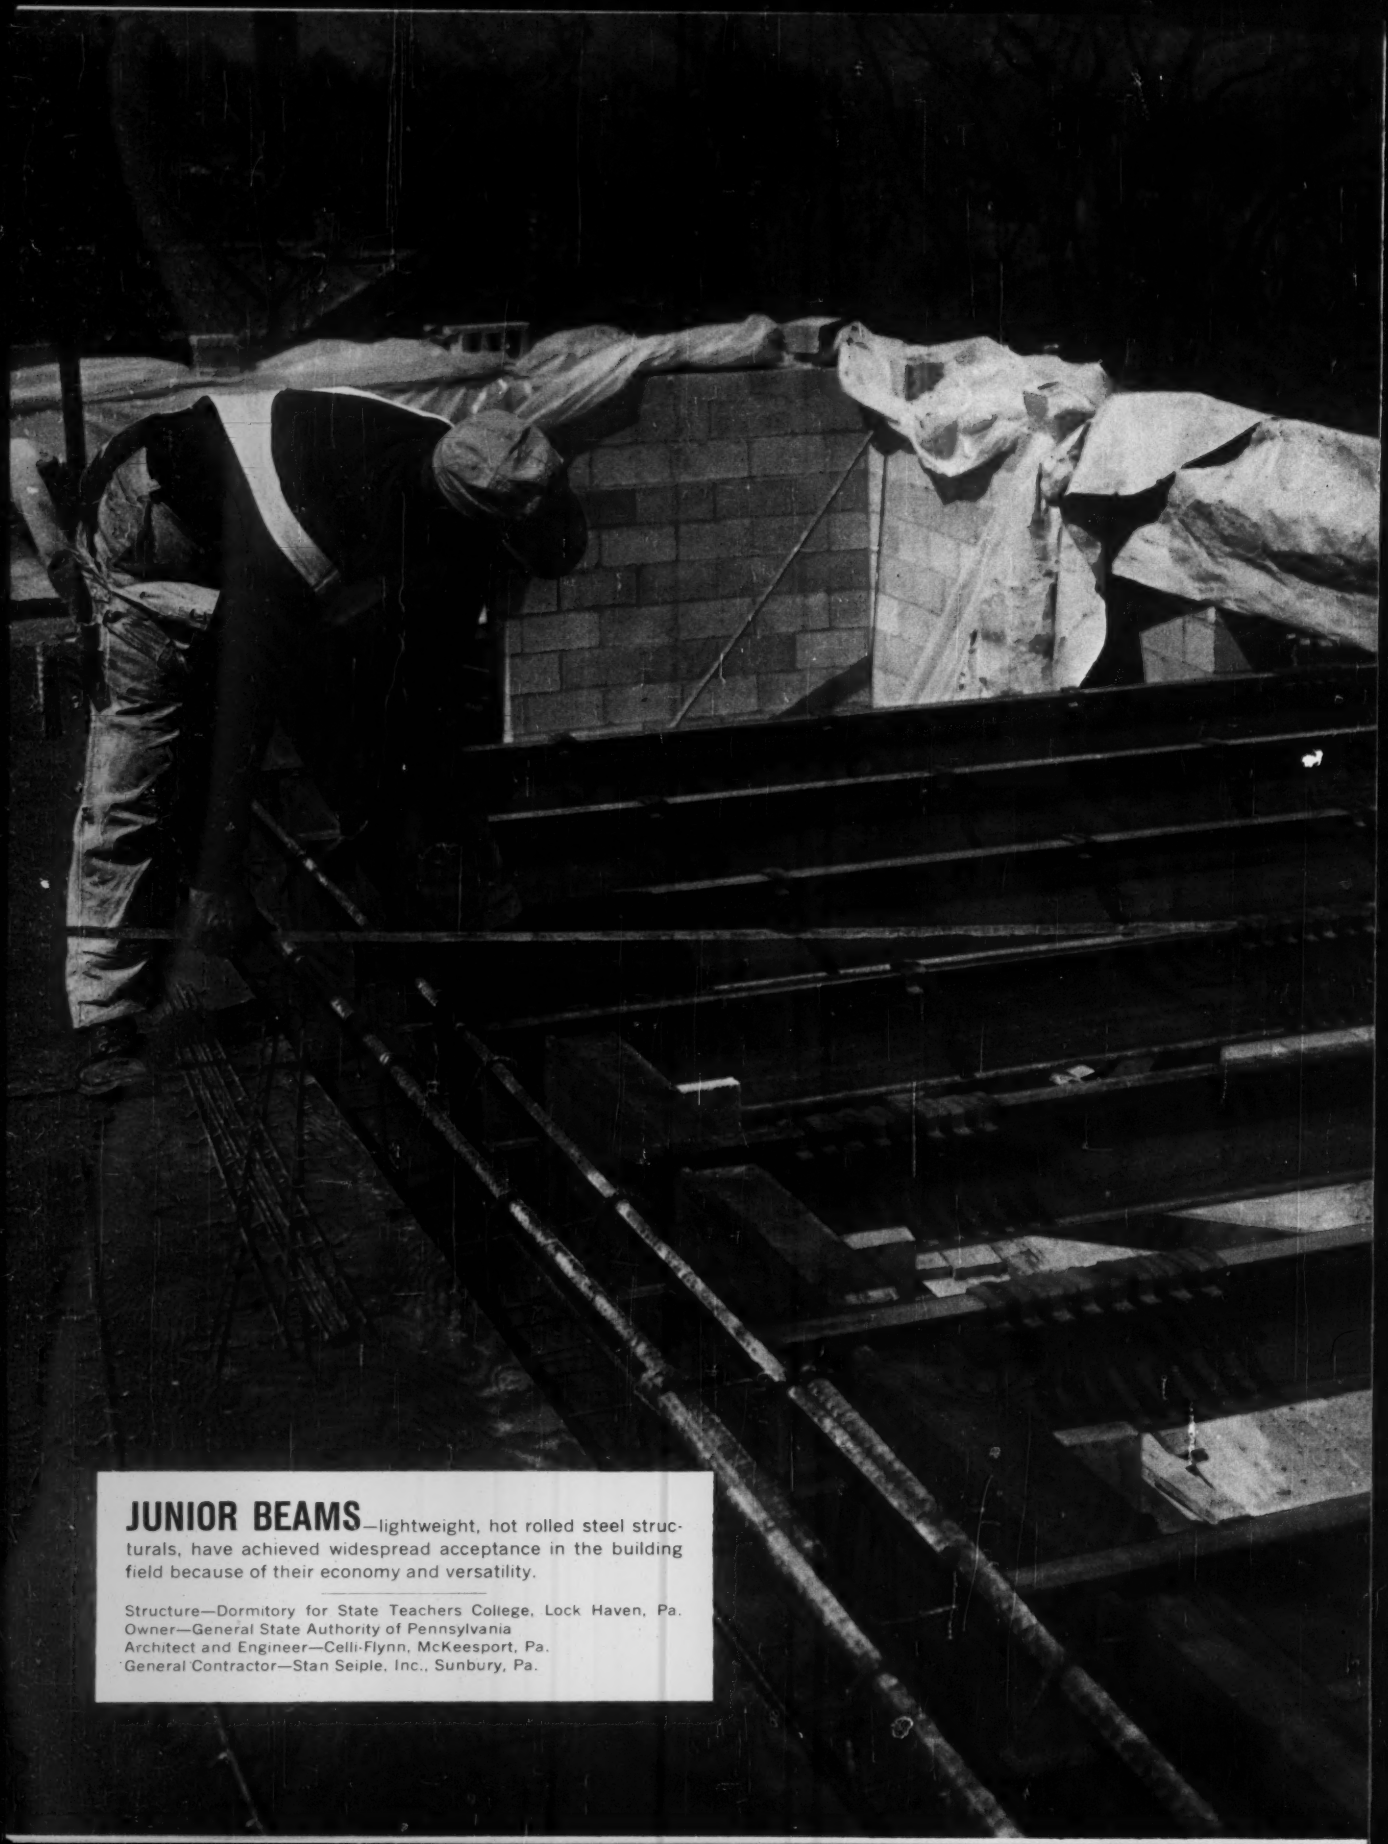

JUNIOR BEAMS—lightweight, hot rolled steel structurals, have achieved widespread acceptance in the building field because of their economy and versatility.

Structure—Dormitory for State Teachers College, Lock Haven, Pa.
Owner—General State Authority of Pennsylvania
Architect and Engineer—Celli-Flynn, McKeesport, Pa.
General Contractor—Stan Seiple, Inc., Sunbury, Pa.

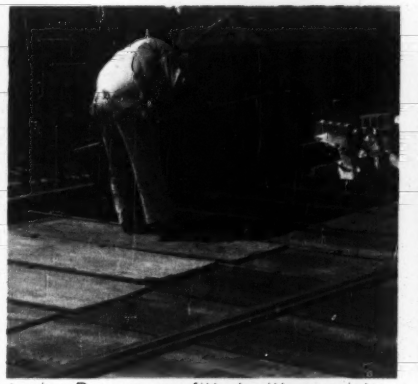

Junior Beams are fitted with special K-clips to support plywood forms for concrete forming.

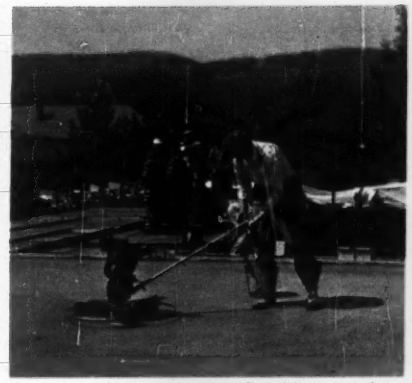

Concrete floor gets the finishing touch. Plywood forms are removed from below by breaking off exposed section of K-clips.

All intermediate floor and roof members in the structure are J&L Junior Beams.

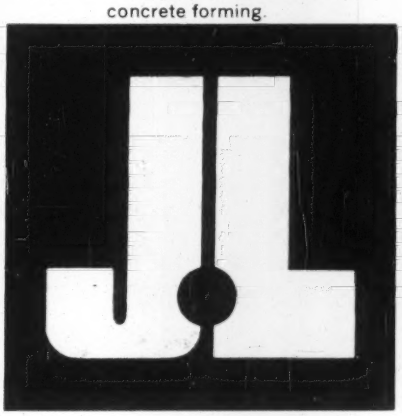

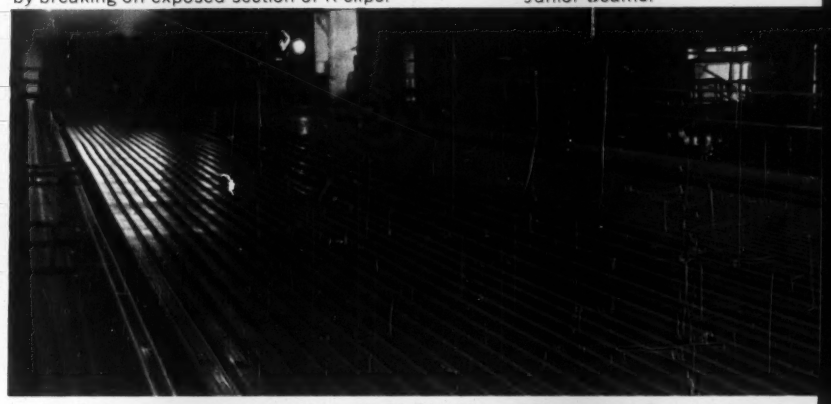

Junior Beams are produced by J&L in 6", 7", 8", 10" and 12" sizes in A-7 and high tensile grades.

College dormitory erected for less than $3,000 per bed

"We attribute a major share of cost reduction to the Junior Beam floor framing system"

. . . reports Celli-Flynn, Architects and Engineers

"This is the lowest cost-per-bed project of nine comparable dormitories built in recent years on the campuses of Pennsylvania State Teachers Colleges," says a partner in the firm. "This savings was accomplished despite increased material and construction costs and the low figure includes the extra expense of built-in furniture."

All intermediate floor and roof members in the structure are J&L Junior Beams, while the main structural frame is reinforced concrete. Here, significant labor savings were achieved because lightweight Junior Beams were raised and positioned rapidly, and were delivered to the job cut to length.

Additional time was saved through the use of an unusual method of forming the concrete floor. This method, known as the K-System, utilizes special cast iron K-clips which are fitted to the top flange of the Junior Beam. The clips support 24" x 96" plywood forms between the beams.

Investigate Junior Beam—K-System construction. Junior Beams are easily adapted to a wide range of architectural design. For further information consult your local steel service center, your nearest J&L district sales office, or write directly to Jones & Laughlin Steel Corporation, 3 Gateway Center, Pittsburgh 30, Pennsylvania.

Jones & Laughlin Steel Corporation

PITTSBURGH, PENNSYLVANIA

Now Dodge builds 'em extra-big... GAS OR DIESEL... G.V.W.'s to 53,000 lbs.!

You're looking at a totally *new* kind of Dodge truck. Big, yet its short 89¾" bumper-to-back-of-cab dimension keeps it agile and easy to handle. Compact, yet its exclusive Servi-Swing fenders make it easy to service.

A truck quality-built for *toughest* construction jobs!

1960 Dodge Cab-Forwards offer new gasoline V-8 engines and four big Cummins diesels. Strong new heat-treated chrome-manganese frames, aluminized mufflers, big 14- and 15-inch clutches. And a whole line of new transmissions, with up to 20 speeds forward!

Big choice of models includes tandem and single-rear-axle types. Many wheelbases of ideal length for dump, rock and mixer bodies. Tractors, all the way up to 76,800 lbs. G.C.W.!

Check the new Dodge "big ones" now. Your Dodge dealer's is the place . . . and delivery is quick!



CUMMINS DIESELS are now available in Dodge for big fuel savings and extra stamina in construction hauling. Four engines available, with displacements from 464 to 743 cu. in.; horsepower to 220; torque to 605 lb.-ft.



SERVI-SWING FENDERS . . . Newest idea in engine servicing! Just flick a latch and these fenders open outward, making the engine easy to reach from either side. Check oil, water, battery without raising the hood!



NEW GAS V-8's, with 361- and 413-cu. in. displacements, deliver up to 228 horsepower. They're packed with premium features, such as tri-metal bearings and oil cooler, to insure peak performance and long life.

DEPEND ON
DODGE
TO SAVE YOU MONEY IN
TRUCKS

A PRODUCT OF CHRYSLER CORPORATION

C. Patterson, G. LaPorte Named Perini Executives

Promotions in the Perini Corp. bring Charles J. Patterson and George S. LaPorte Jr. into executive positions.

Mr. Patterson has been appointed vice president for corporate relations and executive assistant to the president. Mr. LaPorte is the new manager of the industrial and commercial development division.

Mr. Patterson joined the company in 1947 after graduating from the University of Notre Dame. Since then he has been in the office of the president, first as secretary and, after 1957, as special assistant. He is also editor of the company newspaper.

Mr. LaPorte comes to Perini from Cabot, Cabot & Forbes Co., Boston. For the past five years he has been working as a consultant on industrial planning and construction.

Wyoming Highway Division Shifts Three Engineers

Three highway engineers have been promoted to district engineer posts in the Wyoming Highway Department.

M. A. VerBrugge is the new district engineer at Cheyenne. He has been with the department for 32 years, and is being moved up from assistant state materials engineers.

John E. Walter has been promoted from district maintenance engineer at Basin to district engineer.

He has been with the department for 22 years.

A. V. DeBernardi, a veteran of 12 years service, has been named district engineer at Rock Springs.

Arthur D. Bird Appointed To City Engineer Position

Arthur D. Bird is Cincinnati's new city engineer, replacing T. J. Montgomery, who has retired.

Mr. Bird started with the municipal office in 1929 while a student at the University of Cincinnati. After graduating in 1933, he became a junior draftsman working his way up to principal engineer in 1951. He has been involved with the city's $60-million expressways and $50-million sewage programs.

During World War II, he supervised construction of naval facilities in New Caledonia, Guadalcanal, Russel Islands, Green Islands and New Zealand.

Careers

Business

Louis E. Rydell has joined the staff of Harza Engineering Co., Chicago, on an assignment in Pakistan. He has been chief of the planning branch of the Walla Walla district of the Corps of Engineers. In his new position Mr. Rydell serves as resident manager in Pakistan preparing plans for a development of the Indus River. He has been with the Corps for 25 years and has also served on the Oregon state hydroelectric commission.

D. Reid Ross has joined the Hamilton Co. as vice president. Mr. Ross, who has been active in urban renewal work, took an active part in the formation of the Cincinnati Renewal Corp. He has also been executive secretary of the Better Housing League. In his new post, Mr. Ross will work on the construction of low-cost housing in Puerto Rico.

Walter A. Gardner takes over as vice president in charge of engineering for the Harrison Engineering Co., Gastonia, N. C. He has been superintendent of the city water and sewer department since 1954.

John Findlay is general manager of Arthur G. McKee & Co., Toronto engineers. He has been with the office since 1956, first as job supervisor and then as projects supervisor. He succeeds **Carl L. Nilson,** who has been transferred to the company's office in Union, N. J.

Charles R. Graff has been named assistant vice president in charge of west coast operations for the Raymond Concrete Pile Co. He succeeds **Otis C. Struthers,** who has retired.

Harold E. Rowen has been elected a vice president of the McDowell Co., Cleveland engineering and construction company. In his new position he directs the company's Dwight-Lloyd division, a subsidiary of McDowell.

The Cleveland architectural firm of **Garfield, Harris, Schafer, Flynn & Williams** has shortened its name to **Schafer, Flynn & Williams.** The change follows the death of Abram Garfield and the retirement of George R. Harris.

Herbert J. Mayer has been named a partner of the Edward R. Bacon Co., San Francisco construction machinery distributors. He is also executive vice president of Western Machinery Co.

Gordon L. Burt has joined Metro Engineers, Seattle, a group of four consulting firms retained to design the $55-million Seattle sewage project.

(*Continued p.* 46)

• LOWEST OVERALL COST
• MINIMUM MAINTENANCE
• ADAPTABLE TO SPECIAL CONDITIONS
• SURFACE, ELEVATED OR UNDERGROUND
• OVER 2000 TANKS IN SERVICE
PRELOAD
THE PRELOAD COMPANY, INC.
211 East 37th St., New York 16, N. Y.
351 Jefferson, Dallas, Texas
PRELOAD CONCRETE STRUCTURES INC.
837 Old Country Road
Westbury, Long Island, N.Y.
HERRICK IRON WORKS
28400 Clawiter Road
Hayward, California
THE CANADA GUNITE COMPANY, LTD.
7325 Decarie Blvd.
Montreal 16, Canada
INDUSTRIAL PRESTRESSED CONCRETE TANKS
Write for Bulletin T-15
GRANTS, NEW MEXICO . . . Twelve Thickener Tanks 120'8" diameter. Kermac Nuclear Fuels Corporation.

The Partners of

Parsons, Brinckerhoff, Hall & Macdonald

announce that effective January 1, 1960

the name of the firm will be changed to

PARSONS, BRINCKERHOFF, QUADE & DOUGLAS

Maurice N. Quade Walter S. Douglas Alfred Hedefine

John O. Bickel Rush F. Ziegenfelder William H. Bruce, Jr.

165 Broadway

New York 6, New York

Beekman 3-6300

SUPERSONIC FLIGHT SIMULATION

Responsibility for the installation of this Supersonic Ramjet Altitude Test Chamber at The Marquardt Corporation is another example of applied skill and experience you can expect and get from PC & R.

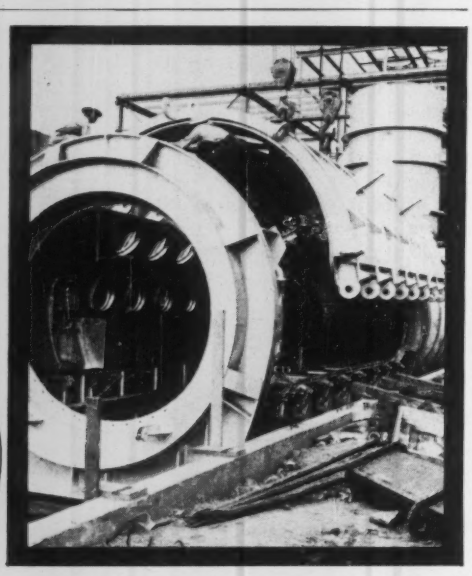

Pacific Crane & Rigging Co.

MECHANICAL CONSTRUCTORS

PACIFIC CRANE & RIGGING CO.

6855 E. Rosecrans Ave., Paramount, California, NEvada 6-9213 — MEtcalf 4-0110

• CRANE SERVICE • POLE RIGGING • MISSILE EQUIPMENT • SPECIAL PROJECTS
• MECHANICAL PIPING . EQUIPMENT SETTING • JACK & ROLLER RIGGING

. . . Men and Jobs

Associations

Dan Shirvin has been re-elected president of the Kentucky State Building and Construction Trades Council.

James T. Holden has been named Ohio division engineer for the National Corrugated Metal Pipe Association. He has held the position of Licking County engineer at Newark, Ohio, for the past eight years.

Paul B. Benden, Jr., Ohio brick manufacturer, has been elected president of the Structural Clay Products Institute for a one year term.

Harry Aviron, vice president of Lipsett, Inc., has been elected president of the Wrecking Contractors Association of New York.

Nathan R. Ginsburg has been elected president of the New York Society of Architects.

C. M. Courson, superintendent of the Tampa sewage plant, has been named president of the Florida Sewage and Industrial Wastes Association, a state section of the American Water Works Association.

Robert L. Moore, superintendent of engineers, Lumbermens Mutual Casualty Co., Chicago, has been named general chairman of the National Safety Council's Construction Section Executive Committee.

Cassatt D. Griffin, assistant chief deputy engineer for Los Angeles County, has been elected president of the International Conference of Building Officials. He has been serving as first vice president for the past year. A graduate of the University of South California, Mr. Griffin has been a building official of Los Angeles County for 25 years.

L. Jack Hallman has been named South Carolina representative for the Carolina's branch of the Associated General Contractors.

George E. Pesa, president of Felix Pesa & Sons Co., Youngstown, Ohio, has been elected president of the Ohio Council of Associated General Contractors. He also heads the Mahoning-Shenango Valley chapter.

John C. Fallon, engineer and building contractor of Alto, Mo., has been named executive director of the newly formed Council of Contractor Associations for the East Side Industrial District in St. Louis. The council has been established to provide statistical and background information concerning construction labor in the district and also works to improve labor relations. Mr. Fallon is a former partner in the J. J. Wuellner & Son Co.

Frank T. Lynch has been elected to a second term as chairman of the Delaware Board of Registration for Profes-

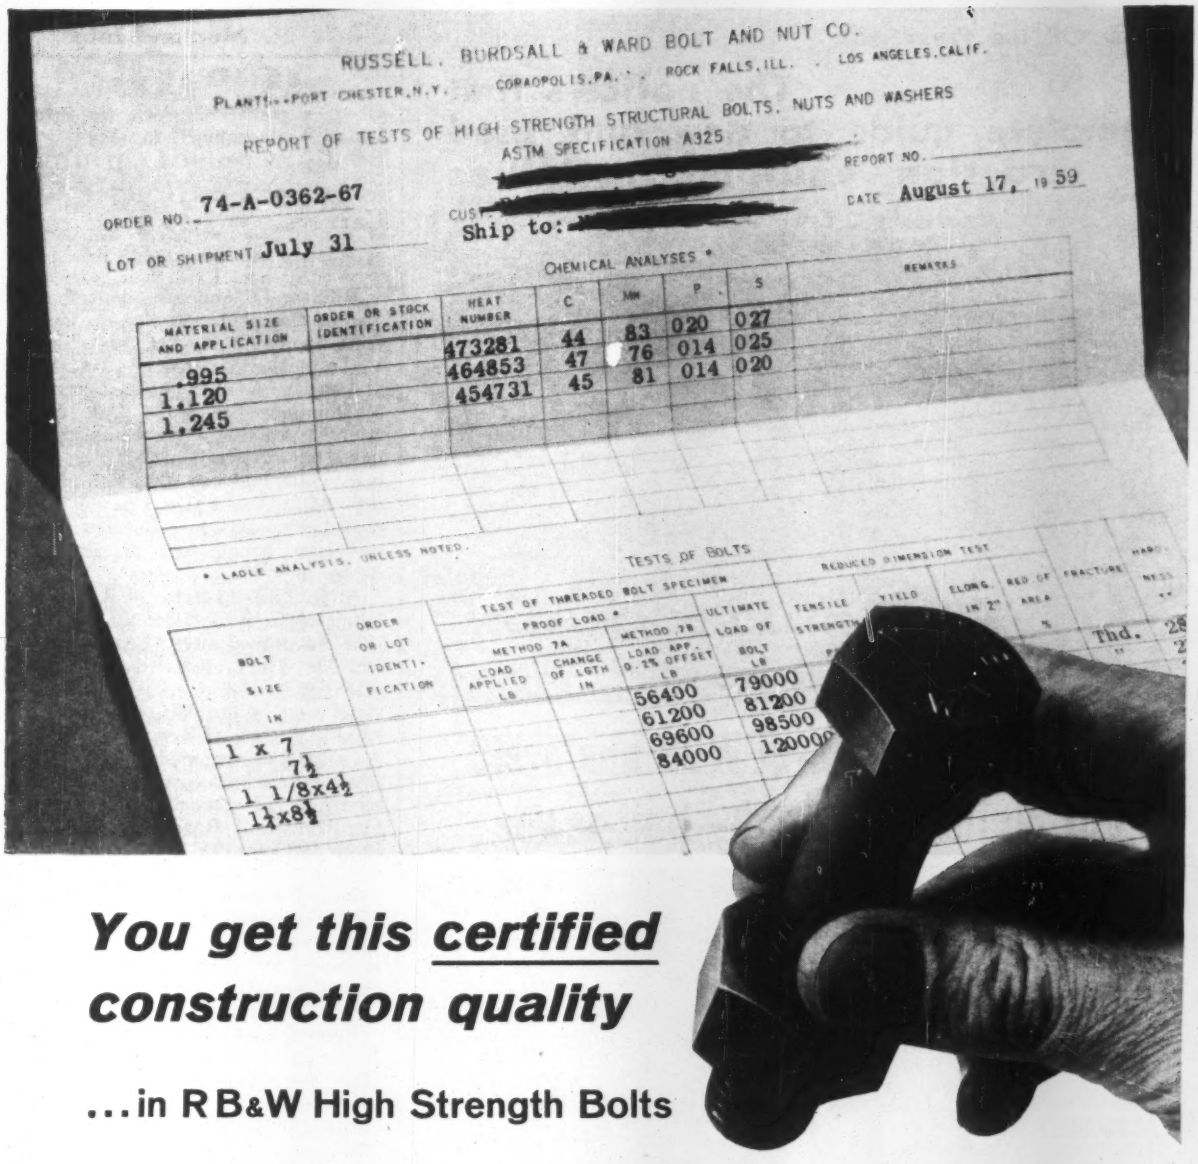

You get this certified construction quality

...in RB&W High Strength Bolts

Will your construction bolts measure up on all the load strength you're counting on? Will their physical properties and chemical analyses assure full conformance to ASTM A325 specification for fasteners used to connect structural steel? There's never any question about it when you use RB&W High Strength Bolts.

Each size has been tested for physical properties and each run has been chemically checked. You get certification with each shipment showing test results. As for RB&W heavy nuts, they're not only perfectly mated for easy assembly with high strength bolts, but they, too, are tested and certified for proof load.

For faster construction, lowest fastening cost per ton of steel erected, and for stronger and more reliable joints, you can't do better than with high strength bolts. And for the best of these bolts, look to RB&W... for certified quality, for finish, for service. Get details. Write Russell, Burdsall & Ward Bolt and Nut Company, Port Chester, N. Y.

RB&W
115th year

Plants at: Port Chester, N Y.; Coraopolis, Pa.; Rock Falls, Ill.; Los Angeles, Calif. Additional sales offices at: Ardmore (Phila.), Pa.; Pittsburgh; Detroit; Chicago; Dallas; San Francisco.

LARGEST INDEPENDENT PRODUCER OF HIGH STRENGTH BOLTS FOR CONSTRUCTION

Now Off the Press!

The nation's first complete guide to new and used construction equipment values



- Professional appraisals of more than 800 models of new and used construction equipment.
- Information on each equipment model includes *new replacement cost, average wholesale and average retail cost by year.*
- All equipment appraised by make, model, series and special attachments.
- Subscription includes supplemental reports on the national equipment market.
- Individual appraisals on equipment not itemized are supplied to subscribers at no cost.
- Developed by a staff whose *only* business is construction equipment appraisal.

Green Guide is now serving banks, contractors, insurance underwriters and adjusters, bonding companies, machinery dealers and others to whom accurate equipment appraisals are important.

ANNUAL RATES PER SUBSCRIPTION:

1 Book	$24.00
2-5 Books	$23.00
6-10 Books	$22.00
11-20 Books	$21.00
More than 20	$20.00

GREEN GUIDE

GREEN GUIDE IS AVAILABLE ONLY ON DIRECT ORDER FROM PACIFIC APPRAISAL COMPANY

SUBSCRIPTION TO GREEN GUIDE

*Name*_____

*Address*_____

*City*_____ *Zone*____ *State*_____

Please enter my subscription for ____ *copies of Green Guide.*

*Enclosed is my check for $*_____ *to*

PACIFIC APPRAISAL COMPANY
735 Industrial Road, San Carlos, California

UMECO

TRANSITS • LEVELS

Guaranteed **QUALITY**

Guaranteed **ACCURACY**

Guaranteed **PERFORMANCE**

Guaranteed **SERVICE**

LOW COST

REPLACEMENT PARTS READILY AVAILABLE

If your supplier has no stock of our instruments, ask him to write us.

•

Send for catalogs

UMECO OPTICAL DIVISION

465 California St. San Francisco 4, Calif.

Representatives:

West Coast:
A. LIETZ CO.
840 Post St.,
San Francisco,
224 S. Hope St.,
Los Angeles

East Coast
HOMER F. RICHARDS
54 Fairview Ave.,
Reading, Mass.

40th YEAR

Spencer White & Prentis INC.

FOUNDATIONS
UNDERPINNING
PILING

CATALOGUE ON REQUEST

10 E. 40th ST., NEW YORK 16
DETROIT: 2033 PARK AVE
CHICAGO: 221 NORTH LaSALLE ST
WASHINGTON, D. C.: TOWER BLDG
PITTSBURGH: EMPIRE BLDG

sional Engineers and Land Surveyors. He is a partner in Van Demark & Lynch, civil engineers in Wilmington, Del.

Careers

Retirements

William D. Anderson, general manager of Campbell and Kenton County Ohio Sanitation District, has resigned. He has held the post since 1954.

Allen S. Gentles, general manager of Dominion Bridge Co. Ltd., retired after 52 years with the company. He joined the company in 1907 as a draftsman while studying at McGill University. After World War 1 he started his own steel contracting business, which was later bought out by Dominion Bridge in 1927.

A. C. Tilley, director of Region VI, Office of Civil and Defense Mobilization, has retired after 42 years of service. Mr. Tilley organized civil defense activities in Hawaii, Alaska and many states west of the Missouri River. He became director of Region VI in 1951. A civil engineering graduate from Rensselaer Polytechnic Institute, Mr. Tilley served for 22 years with the Nebraska Department of Roads and Irrigation. From 1935 to 1941 he was state engineer.

Belle Courtney, an engineer with the Michigan State Highway Department for 31 years, has retired. She was responsible for much of the design on the 147-mile Interstate expressway between Detroit and Grand Rapids.

Randolph H. Barnard has resigned as president of Johns-Manville Fiber Glass, Inc., Toledo. He continues as a consultant for the firm.

E. O. Jewel, general manager of Toledo-Lucas County Port Authority, has retired. He is also former port director in New Orleans and Norfolk.

Burt L. Knowles has retired after 25 years with the Associated General Contractors. He continues to work as a consultant for the Association, handling special assignments. Before joining the Association he was president of the E. D. Ward Co., building and heavy construction contractors of Worcester, Mass.

John T. Morgan, superintendent of public works at Kernersville, N. C., has resigned to enter private business. Before taking the municipal job, he was engineer for the W. H. Weaver Construction Co., Greensboro, N. C.

John G. Butter has retired as chief engineer of the Iowa Highway Commission, a position he held since 1954. He continues as a consultant with the commission.

Obituaries

California Highway Chief Dies Soon After Promotion

John W. Vickery, 67, a veteran of 42 years with the California Division of Highways, died just two months after he was appointed state highway engineer and chief of the Division of Highways. He had been chief planner of the state's freeway program for 12 years, until Oct. 1, when he was named to succeed George T. McCoy as head of the division (ENR Nov. 12, p. 63).

Mr. Vickery joined the California Division of Highways in 1917, after study at Los Angeles Polytechnic Institute. He was appointed assistant state highway engineer in charge of planning in 1947 when California began its intensive highway modernization program. He was promoted to deputy state highway engineer in 1955.

George W. Lamb, 59, Topeka, consulting structural engineer, since early this year, and before that for four years bridge engineer with Howard, Needles Tammen & Bergendoff. A civil engineering graduate of the University of Kansas, he was with the Kansas State Highway Department from 1929 to 1945, first as a designer and then as chief bridge engineer. Subsequently, he was district engineer at Topeka for the American Institute of Steel Construction for nine years. He was a former national director of the American Society of Civil Engineers.

John Henry Zurn, 34, president of Zurn Industries, Inc., Erie, Pa., in an airline crash. He was director of sales and marketing for the plumbing products and fluid control division of Zurn, manufacturers of plumbing drainage controls and fluid handling devices. He was a graduate of the University of Pennsylvania's Wharton School of Finance.

Edward Necarsulmer, 85, retired architect and designer of many commercial, industrial, institutional and residental structures in New York City. With his design for the front of Franklin Simon & Co. specialty shop, he won the 1922 award of the Fifth Avenue Association. He was also the architect for the Kelley-Springfield Tire Co. plant at Cumberland, Ohio.

R. A. McMillan, 59, dean of the engineering school at Texas Institute of Technology in Dallas. Before joining the Institute's faculty he taught public school for 33 years.

Cleveland 80W lays pipe for 13-mile sewer line—does backfilling, too

G. C. McLeod Co. of Edmonton, Alberta made extensive use of its Cleveland 80W for laying 20" and 8" asbestos pipe on a 69,000-foot sanitary sewer line in Nanaimo, B. C. Even in the extremely wet and heavy mud of the salt water tidelands shown above, construction moved ahead 800—1,300 feet daily. As the line progressed into drier ground, the 80W was further employed in backfilling and cleanup operations.

THE ONE-MAN-OPERATED 80W

- **DOES SIDEBOOM WORK OF ALL KINDS,** unloads, strings, lays pipe, sets valves, hydrants, etc.
- **BACKFILLS SPOIL** clean and fast from *either* side of trench.
- **TAMPS SPOIL** simultaneously with pull-backfilling, or separately, as required.



Check with your distributor now—get the complete 80W story

The CLEVELAND TRENCHER Co.

20100 ST. CLAIR AVE. • CLEVELAND 17, OHIO

Good Everywhere

Labor and Materials Prices

Monthly Market Quotations by ENR Field Reporters

HOURLY WAGE RATES—Base rate + fringe benefits

	Common Labor: Building	Common Labor: Heavy Const	Bricklayers	Carpenters	Struct. Iron Workers	Hoisting Engineers	Plasterers	Electrical Workers	Steamfitters	Truck drivers: 1½ T	Truck drivers: under 4 cy	Truck drivers: over 4 cy
Atlanta	$1.825	$1.825	$3.85	$3.20	$3.45+7½¢	$3.325	$3.315*B*	$3.50+10¢	$3.80+20¢	$1.825	$1.925	$2.175*B*
Baltimore	2.20+7½¢	2.20+7½¢	4.10+10¢	3.30+7½¢*f*	3.90+7½¢	3.35/4.05+10¢*A*	3.80+10½¢	3.75+7½¢	3.74+9½¢	2.15+7½¢	2.15+7½¢	2.25+7½¢
Birmingham	1.85	1.95	3.95	3.15	3.45+10¢*mn*	3.18	3.27	3.65	3.47+10¢*p*	1.90	2.10	2.35
Boston	2.65+10¢	2.55+10¢	3.80+20¢	3.55+10¢	4.02+20¢	3.90+10¢	3.65+45¢	3.90+25¢	3.75+25¢	2.70+8¢	2.70+8¢	2.70+8¢
Chicago	3.02½+7½¢	3.02½+7½¢	4.07½+7½¢	3.75+20¢*o*	4.15+16¢*n*	3.75+5¢	3.95+23¢	4.10	3.95+24¢	2.48+15¢	.....	.....
Cincinnati	2.75	2.65	3.90+10¢	3.72½*D*	3.80+10¢	3.475/3.70*A*	3.725+.04	3.97+39½	3.95+9½¢	2.55+62½¢	2.65+6½¢	2.75+6½¢
Cleveland	3.25*b*	3.165*b*	3.965+10¢*b*	3.99*b*	3.89+10¢*b*	3.99*b*	3.99*a*	4.05*b*	3.70+20¢*b*	2.82+15¢*a*	2.82+15¢*a*	2.82+15¢*a*
Dallas	1.80	1.80	3.95	3.35*b*	3.425+7½¢	3.45*B*	3.75+13¢	3.50+7½¢	3.575+8½¢	1.80/2.625	1.80/2.625	1.80/2.625
Denver	2.25	2.25	3.90	3.50	3.41+7½¢	3.15	3.625+12¢	3.75+14¢	3.80+10¢	2.40*B*	2.65*B*	2.80*B*
Detroit	2.80+42¢	2.80+42¢	3.90+30¢	3.55+42¢	3.90+22½¢	3.55+36¢	3.66+34¢	3.90+44	3.835+17½¢	2.95	2.95	2.95
Kansas City	2.455	2.505	3.95	3.50	3.55	3.445	3.75	3.75+355¢*E*	3.70+9½¢	2.43	2.43	2.505
Los Angeles	2.88+10¢	2.88+10¢	4.00+25¢	3.60+20¢	4.07½+23½¢	3.61+15¢	4.125+42½¢	4.40+44	4.10+52¢	3.15½+10¢	3.15½+10¢	3.345+10¢
Minneapolis	2.70	2.70	3.875	3.45	3.62	3.45	3.50+33¢	3.55+39¢	3.62+20¢	2.70	2.70*d*	2.85
New Orleans	1.85¢	1.85¢	3.675+7½¢*ed*	3.20*d*	3.50+7½¢*ed*	3.325+7½¢*ed*	3.19+5¢*jk*	3.675+7½¢	3.60+15¢*dl*	2.675+7½¢*ed*	2.675+7½¢*ed*	2.675+7½¢*ed*
New York	3.30+26¢*c*	3.30+26¢*c*	4.80+44¢	4.40+35¢*k*	4.60+47¢*j*	4.65+37¢	4.50+62¢	3.90+1.272	4.50+54¢	2.35+22½¢	3.40+28½¢	3.40+28½¢
Philadelphia*R*	2.50	2.40+10¢	4.10+17¢	3.785	4.30+23¢	3.935/4.215+10¢*A*	4.15+15¢	4.37½+16¢	4.10+31½¢	2.45+15	2.45+15½¢	2.45+15
Pittsburgh	2.575+20¢	2.425+20¢	4.30+20¢	3.775+20¢	4.15+20¢	3.73+20¢	3.95+20¢	4.35+32½¢	4.00+20¢	2.50+20¢	2.635+20¢	2.735+20¢
St. Louis	2.775+10¢	2.775+10¢	4.05+32½¢	3.725+10¢*c*	3.75+7½¢	3.825	3.90+07½¢	4.11+31¢	4.07½+22½¢	2.80+12½¢	2.80+12½¢	2.80+12½¢
San Francisco	2.865+10¢	2.865+10¢	4.25+42½¢	3.55+30½¢	4.075+22½¢	3.405+10¢	3.79+63¢	4.22+29¢	4.14+54¢	2.81+20¢	2.75+20	2.89+20¢
Seattle	2.85+10¢	2.85+10¢	4.15+10¢	3.32+10¢	3.59+10¢	3.59+20¢	3.57+30¢	3.80+26¢	3.81+24¢	3.15+20¢	3.15+20¢	3.35+20¢
Montreal	1.65+4¢*q*	1.65+4¢*q*	2.45+5¢*q*	2.25+5¢*q*	2.45+5¢	2.35+5¢	2.45+5¢	2.35+5¢	2.47+5¢*s*	1.65+4¢	1.65+4¢	1.65+4¢
Toronto	1.80+7¢	1.80+7¢	3.00+12¢	2.80+12¢	2.90+12¢	3.05+12¢	3.00+20¢	3.30+13¢	3.20+13¢	1.90+14½¢	1.90+14½¢	1.90+14½¢

	Tractor Operators—Incl. bulldozers: 34-49 hp	70-100 hp	100 & over	Tractor scraper 15-16 cy	Power cranes & shovels: ½ cy	¾ cy	Motor grader oper	Air comp oper	Air tool oper
Atlanta	$2.925	$3.00	$3.00	$2.85	$3.375	$3.525	$2.85	$2.775	$1.925
Baltimore	3.65+10¢	3.65+10¢	3.65+10¢	3.65+10¢	4.05+10¢	4.05+10¢	3.65+10¢	3.25+10¢	2.25+7½¢
Birmingham	3.18	3.18	3.18	3.18	3.18	3.18	3.18	2.77	2.05
Boston	3.52½+20¢	3.52½+20¢	3.52½+20¢	3.52½+20¢	3.90+20¢	3.90+20¢	3.52½+20¢	3.45+20¢	2.80+10¢
Chicago	3.50+5¢	3.65+5¢	3.30+5¢	3.30+5¢	4.10+5¢	4.10+5¢	3.50+5¢	3.40+5¢	3.70+5¢
Cincinnati	3.475+10¢	3.475+10¢	3.475+10¢	3.475+10¢	3.475+10¢	3.70+10¢	3.70+10¢	3.70+10¢	3.70+10¢
Cleveland	3.74*b*	3.74*b*	3.74*b*	3.74*b*	3.99*b*	3.99*b*	3.74*b*	3.615*b*	3.615*b*
Dallas	1.80/2.625	1.80/2.625	1.80/2.625	1.80/2.625	3.175*AB*	3.175*kB*	1.80/2.625	1.95	1.95
Denver	2.40	3.00	3.00	3.00	3.15	3.15	3.00	3.00	2.53
Detroit	3.55+36¢	3.55+36¢	3.55+36¢	3.55+36¢	3.55+36¢	3.55+36¢	3.55+36¢	3.275+15¢	2.93+34¢
Kansas City	2.75	3.20	3.20	3.20	3.445	3.445	3.20	3.20	2.55
Los Angeles	3.91+15¢	3.91+15¢	3.91+15¢	4.01+15¢	4.01+15¢	4.01+15¢	4.01+15¢	3.13+15¢	3.09+10¢
Minneapolis	3.08	3.30	.....	3.30	3.52	3.78	3.08	2.97	2.85
New Orleans	3.325+7½¢*ed*	3.325+7½¢*ed*	3.325+7½¢*ed*	3.325+7½¢*ed*	3.325+7½¢*ca*	3.325+7½¢*ed*	3.325+7½¢*ed*	2.675+7½¢*ed*	1.95¢
New York	4.025+32¢	4.025+32¢	4.025+32¢	4.15+33¢	4.90+39¢	4.90+39¢*k*	4.15+33¢	4.15+33¢	4.15+21¢
Philadelphia	3.52+10	3.665+10	3.665+10	3.79+10	4.215+10	4.215+10	3.765+10	3.41+10	2.35
Pittsburgh	3.565+15¢	3.565+15¢	3.565+15¢	3.565+15¢	3.765+15¢	3.765+15¢	3.765+15¢	3.275+15¢	2.435+20¢
St. Louis	3.825	3.825	3.825	3.825	3.825	3.825	3.825	3.275	3.275
San Francisco	3.70+20¢	3.70+20¢	3.70+20¢	3.70+20¢	3.85+20¢	3.85+20¢	3.75+20¢	3.10+20¢	2.955+20¢
Seattle	3.56+20¢	3.56+20¢	3.56+20¢	3.56+20¢	3.93+20¢	3.93+20¢	3.65+20¢	3.29+20¢	3.05+10¢
Montreal	1.85+4¢	2.08+5¢	2.08+5¢	2.08+5¢	2.35+5¢	2.35+5¢	2.08+5¢	1.95+4¢	1.95+4¢
Toronto	2.30+10¢	2.40+10¢	2.40+10¢	2.40+10¢	2.90+12¢	3.05+12¢	2.70+11¢	2.40+10¢	2.40+10¢

ENR Skilled Average (Bricklayers, Carpenters, Iron Workers): $3.897. ENR Common Average $2.61

Description of fringe benefits last appeared Feb. 26; will next appear in Sept. 17 Cost Issue. *A 1-2 drum. *B revised eff. July 1 *E revised eff. Oct. 1

DEFERRED WAGE INCREASES UNDER PRESENT CONTRACTS: 1960: a May 1; 10¢ b May 1; 12¢ k May 1; 8¢ l May 1; 10¢ m Jan. 1; 15¢ n Jul. 1; 5¢ o Jun. 30; 22½¢ s Apr. 1; 15¢ 1959: c Dec. 1; 10¢ d Nov. 1; 10¢ e Nov. 1; 5¢.

BUILDING BOARD & LATH AND INSULATION—DELIVERED TRUCKLOAD LOTS

	GYPSUM PLASTER BOARD tapered edge per Msq ft ½"	⅝"	GYPSUM BOARD LATH plain or perf per Msq ft ⅜" x 16" x 48"	GYPSUM SHEATHING tongue & groove per Msq ft ½" x 2' x 8'	FIBER BOARD SHEATHING asph impreg & coat per Msq ft ½" sq ed	½" T&G	FIBER BOARD INSULATION sq edge, paint per Msq ft ½"	MINERAL WOOL INSULATION loose, per 40-lb bag a	3" batts per M sf	GLASS FIBER INSULATION loose, per 40-lb bag a	3" batts per M sf	ALUMINUM FOIL 60# Kraft 1 side foil per roll of 250 s. f.	Expansible Blanket 2 layers foil per Msq ft
Atlanta	$65.00*F*	$55.00*F*	$42.50*F*	$68.00*F*	$72.00*F*	$127.00*F*	$75.00*F*	1.59*z*	$70.00*F*	$2.00	$80.00*F*	$4.77*qi*	
Baltimore	52.80	46.10	34.50	55.35	65.00	108.50	69.00	1.30*F*	66.50*F*	1.50*F*	45.00*F*	4.00*F*	$33.50*F*
Birmingham	68.90*H*	57.00*H*	47.77*H*	75.00*H*	67.50*H*	140.50*H*	83.50*H*	1.40	70.00	1.60	75.00	3.77*gG*	.....
Boston	60.00*mH*	50.00*mH*	36.00*mH*	60.00*mH*	65.00*H*	120.00*H*	79.00*kmH*	1.40*bH*	75.00*H*	.....	75.00*H*	5.30*zHS*	53.50*qH*
Chicago	67.00	54.00	45.00	62.00	87.00	123.00	87.00	1.85	80.00	.....	63/65	5.25*j*	.....
Cincinnati	52.50*wH*	42.85*wH*	33.05*wH*	51.16*wH*	77.00*wH*	125.00*wH*	72.50*wH*	1.45*wH*	62.50*wH*	1.45*wH*	62.50*wH*	3.28*jwJ*	50.00*wJ*
Cleveland	62.00*CF*	56.50*CF*	41.50*CF*	65.00*CF*	80.00*CF*	129.00*CF*	80.00*CF*	1.35/1.50*H*	72.00*H*	.....	63.75	15.00*ioJ*	55.00*J*
Dallas	56.25	46.85	42.50	56.25	68.75	118.00	68.75	2.00	65.69	1.45	70.67	5.00*gAG*	45.00
Denver	66.50*H*	58.50*H*	45.00*H*	68.75*H*	84.00*H*	130.00*H*	84.00	1.50*b*	65.00*ub*	1.75*b*	65.00*a*	5.25	48.65
Detroit	66.00*K*	55.00*K*	43.00*K*	65.00*K*	62.50*DK*	103.50*DK*	62.50*DK*	1.30*b*	50.00	1.95*b*	88.00	.....	.....
Kansas City	72.00*H*	62.00*H*	45.00*H*	.....	75.00*H*	122.00*H*	80.00*H*	1.40*H*	75.00*H*	1.80*H*	75.00*H*	3.60*d*	53.98
Los Angeles	66.00*F*	60.50*F*	0.33*xF*	64.50*F*	75.00*F*	125.00*F*	80.00*F*	76.00*BeF*	83.00*F*	1.35*s*	64.00	4.40*g*	7.45*V*
Minneapolis	75.00*F*	65.00*F*	0.41*xL*	75.00*F*	95.00*F*	130.00*F*	78.00*F*	2.25*yF*	80.00*F*	2.10*F*	80.00*F*	4.25*F*	.....
Montreal	58.00*M*	49.30*M*	37/41.50*M*	53.00*M*	64.75*M*	.....	58.50*M*	1.50*M*	66.00*M*	1.50*M*	66.00*M*	9.00*qM*	56.00*M*
New Orleans	57.00*H*	52.00*H*	45.00*H*	60.00*H*	67.00*H*	140.00*H*	80.00*H*	2.00*L*	70.00*	.....	.....	.....	52.12*U*
New York	65.00*H*	55.00*H*	42.50*H*	65.50*H*	78.00	124.00	78.00	1.55*b*	68.50*k*	.....	.....	4.38*iH*	40.00*eH*
Philadelphia	*HR** 52.50	46.00	36.00	52.00	70.00	105.00	70.00	1.05	50.00	1.40	50.00	5.25	60.00
Pittsburgh	74.00*K*	65.00*K*	40.00*K*	63.00*K*	63.00*K*	103.35*K*	58.10*K*	1.10*xK*	55.00*K*	1.10*xK*	55.00*K*	4.20*iqK*	38.50*K*
St. Louis	65.00*HO*	55.00*HO*	40.00*HO*	70.00*HO*	76.00*HO*	120.00*HO*	80.00*HO*	1.35*yHO*	85.00*HO*	2.09*PHO*	74.00*HO*	4.50*iqHO*	.....
San Francisco	60.00*F*	49.00*F*	0.36*xF*	61.00*F*	68.00*F*	109.00*F*	67.00*F*	1.75*F*	66.50*F*	1.75*F*	66.50*F*	5.10	60.00*F*
Seattle	66.80*K*	57.65*K*	51.05*K*	65.00*K*	74.50*K*	125.00*K*	73.50*K*	1.15*tK*	58.00*K*	1.90**pK*	51.00**lKh*	4.25*K*	46.50*EK*
Toronto	58.00	50.00	38.00*L*	64.50	61.50*T*	.....	64.00*T*	1.65	65.50	.....	65.50	14.75*o*	46.00

** F.o.b. warehouse. *a Semi thick. *b 30# bag. *c 3 layers of foil: $54.50. *d 40# kraft paper, 5 Msf, 100 500 rolls. *e 20¢ sq ft bag, 4" thick. *f Full trailer loads. *g 80# kraft paper backing 400 rolls or over. *h LCL. *i 40#. *j 80#. *k 2-in. *l 2". *m 8 to 10 ton quantities. *n Distributor's siding. *o Per Msf roll. *p 32¢ bag. *q 500 sf. *s 35¢ bag. *t 26¢ bag *u Flame proof $75. *v 5000 sf quantity. *w F.o.b. city. *x Sq. yd. *y 30¢ bag. *z Spun rock wool. *A 650 sf. *B ton. *C F.o.b. plant, freight allowed. *D CL. *E 10 Msf. *F less 2% disc, 10th. *G ½ of 1%, 10 days. *H 2% disc, 10 days. *J 1% disc, 10 days. *K less 2% for cash. *L 5% disc, 10th mo. *M fed. tax incl. *N 1% disc, 10 days. *O add 2% sales tax. *P 50 lb. bags, *Q add 4% sales tax. *R revised. *S 45 lb. *T less 2%, 30 days. *U lots of 2606 sq. ft. *V 250 sf roll. * Philadelphia prices revised watch for analysis.

MEXICO CITY WAGES & PRICES

WAGES, av per week, 8 hr day (pesos)		Sept '59	Oct. '59
Common labor,	building (peons)	87.50	87.50
	heavy const (peons)	87.50	87.50
Skilled labor,	carpenters 1 cl	175.00	175.00
	bricklayers 1 cl	210.00	210.00
	struct. ironworkers	280.00	280.00

MATERIALS PRICES, F.o.b.City (pesos)		Sept '59	Oct. '59
Struct. steel shapes, fob Monterey			
I-beams, 3 x 3 x 4"	per metric ton	2400.00	2400.00
Reinf. steel, corrugated rods, per ton			
⅜"–½" x 11 meters		1900.00	1900.00
¾"–1" x 11 meters		1900.00	1900.00

	Sept '59	Oct. '59
Gravel, truckload, per cu meter		
Blue gravel	25.00	30.00
Cement, std. port. (Tolteca)	2.40	2.40
Lumber, 2"x4" 1st class pine..per M sq. ft.	2200.00	2100.00
2"x4" 2nd class pine..per M sq. ft.	1900.00	1800.00

Materials and Labor Prices

Monthly Market Quotations by ENR Field Reporters

CEMENT, AGGREGATE, READY-MIXED CONCRETE—F. O. B. CITY

	PORTLAND CEMENT* Per bbl. C/L lots cash, dis. not deducted			SAND AND GRAVEL Per ton, carload lots			CRUSHED STONE Per ton, carload lots		CRUSHED SLAG Per ton, carload lots, f.o.b. plant		CONCRETE BLOCK 8x8x16-in.,* truckload del.,* per block		CONCRETE Ready Mixed 1:2:4 del. per cy
	Paper	Bulk	Mortar	Gravel, 1½ In.	Gravel, ¾ In.	Sand	1½ In.	¾ In.	1½ In.	¾ In.	Sand grav.	Lt. wgt. agg.	50 cy & over
Atlanta	$4.38a‡	$3.88a‡	$3.68a‡	$3.10a‡	$3.10a‡	$1.85‡e	$2.18e	$2.33e	$1.65r	$1.75r	$0.175o	$0.21o	$13.75g
Baltimore	4.42a	3.91a	3.46a	2.80‡a	2.80‡a	2.25‡a	2.85‡a	2.90‡a	2.05‡a	2.00‡a	.18a	.18a	13.50ou
Birmingham	4.23c	3.30cf	..	2.53ns	2.53ns	2.13ns	2.75e	2.75e	1.65d	1.75d	.18	.18	14.66q
Boston	5.83ip	4.52ap	4.90imp	3.00qsz	3.00qsz	3.00qsz	1.75qsz	1.85qsz	..	..	.23o	275ao	15.00q
Chicago	4.40ag	4.02ag	4.15g	3.78‡e	3.78‡be	4.13‡be	3.95‡be	3.95‡be	2.25‡e	2.25‡e	.26‡e	26‡be	14.00e
Cincinnati	4.68c	4.16c	4.18c	2.29‡cu	2.34‡cu	2.44‡cu	2.51‡cu	2.74‡cu	1.80u	1.80u	.20o	25ao	14.00qr
Cleveland	1.30‡	..	3.89‡ae	2.25ae	2.10ae	1.75ae	2.80‡fy	2.80‡fy	2.20‡fR	2.20‡fR	..	23f	16.50u
Dallas	3.65a	3.25a	3.53a	2.65‡a	2.75‡a	1.90‡	2.43	2.63	..	..	..	27	12.50z
Denver	4.79a	4.29a	4.79	1.95‡	2.15‡	1.42‡b	..	3.00‡z	..	..	.25	27ao	11.90
Detroit	4.35s	3.89aqq	3.92a	4.50‡abm	4.50‡abm	4.25‡abm	3.75‡abm	3.75‡abm	2.47aqaa	2.47aqaa	.22u	25‡au	15.00eaa
Kansas City	4.52a	3.92a	4.30a	..	..	1.85‡a	2.00‡a	2.00‡a	..	..	22a	26c	14.00
Los Angeles#‡	5.12ch	4.68ch	5.60c	2.56‡af	2.76‡af	2.41‡af	2.41‡af	2.46‡af	..	..	19f	305	12.46hlz
Minneapolis	4.66a	4.15a	4.25a	2.70‡ae	2.70‡ae	1.60‡ae	3.95‡ae	3.95‡ae	..	..	20g	..	14.30f
Montreal	3.36‡det	3.11‡det	3.72‡det	1.90‡at	2.15‡at	2.40‡a	1.90††	2.15††	2.00†	2.00†	20†	.28††	10 80ak†
New Orleans	4.06b	3.65b	3.85b	2.61b	2.61b	2.16b†	..	..	1.65d	1.75d	29r	.29	14.00e
New York	4.58aR	4.18aR	3.65aR	..	3.20bk	2.40bkw	2.85blbb	2.85blbb	..	..	.265nwo	.32bwo	17.60ay
Philadelphia	4.39‡ae	3.99‡ae	3.51‡e	1.95‡a	1.95‡a	1.55‡a	2.00‡a	2.30‡a	2.25‡a	2.25‡a	..	.225	13.90z
Pittsburgh	5.65bjk	4.62bj	5.00bj	2.85‡aqr	2.85‡aqr	3.08‡aqr	2.00‡aqr	2.00‡aqr	2.10w	2.10w	.26rz	26rz	15.80o
St. Louis##	4.54a	4.04a	4.24a	3.40‡as	3.40‡as	2.40/3.40‡as	1.75‡s	1.75‡s	..	..	.255‡s	.315‡co	13.65/14.10g
San Francisco	4.34c	3.79c	4.78c	2.02	2.02	2.12	2.17	2.17	..	..	.24	28cl	13.00cw
Seattle	4.47‡a	3.75ag	4.65a	4.25‡bm	4.25‡bm	4.25‡bm	4.50‡bm	4.50‡bm	..	..	.324s	45cs	13.90j
Toronto	5.00i	4.00Rt	5.00i	2.40	2.40	2.05	2.40	2.40	2.40	2.40	.26	.275cu	13.75q

‡ Delivered. * Prices incl. dealers discount except as noted. # Add 4% sales tax. ## Add 2% intrastate sales tax. R Revised. † Plus 6% Mun & Prov tax.

CEMENT: •a Less 10¢ disc. 15 days. •b Less 2% disc. 15 days. •c Less 10¢ disc. 10 days. •d 10¢ disc. 20 days. •e Truckload lots. •f Fob mill, add $14.58 to $21.31 per car switching charges. •g fob mill + freight. •h LCL. •i Less 2% disc. 10 days. •j Truck lots, fob yard. •k 100 bag lots •l over 150 sacks. •m Sold in bags only. •n Less 5% disc. 30 days. •o Plus 50¢ for Sat. del. •p 5-8 ton truckload. •q F.o.b. mill •s In bags & bbl. Only •t min. 7 tons

SAND, GRAVEL, STONE & SLAG: •a Truck lots. •b Per cu. yd. •c 5 tons up. •d Less 5¢ disc. 10 days. •e Less 2% disc. 10th. •f Less 2% disc. 15th. •g Less 5% for cash. •h Less than 5 tons. •j F.o.b. quarry. •k Barge lots asd. •l F.o.b. scow Hudson river. •m Less 2% for cash. •n F.o.b. cars. •q F.o.b. yard. •r less 5% disc. 15th. •s Less 2% disc. 10 days. •t Less 10¢ disc. 10 days. •u Less 5¢ disc. 10 days. •v Less 2% disc. 15 days. •w Less 10¢ disc. 15 days. •x Incl. 35¢ switch. charge. •y F.o.b. dock. •z 5-8 tons. •aa Less 5% disc. 15 days. •bb Less 2% 25th of month

CONCRETE BLOCK: •a Cinder. •b Waylite. •c Haydite. •d Celocrete, •e 5¼ x 8 x 12 in. •f 8 x 4 x 16. •g F.o.b. truck at job. •l F.o.b. plant San Rafael. •m F.o.b. yard. •n 8 x 8 x 16. •o Less 2% disc. 10 days. •p Less 2% disc. 10th. •q Less 5% disc. 10th. •r Less 2% disc. 15 days. •s Less 2% disc. cash. •t Siporex, 7 x 8 x 16. •u Less 5% disc. 10 days. •v Less 12% disc. 15th. •w Eff. 1/1/57 •x Revised Oct. 1.

READY MIXED CONCRETE: •a 6 cu yd or over del. Man. •b 25 cu yds or more. •c 10-100 cy. •d 1-3 mi. zone add 15¢ for ea. add'l 1-mi. zone. •e 3,000 lb comp. •f 2,500 lb. comp., less 5% disc. 30 days. •g Less 25¢ disc. 15 days. •h Less 50¢ for cash. •i 5% off for cash. •j 2% off for cash. •k Federal tax included. Add 6% mun. & prov. tax. •l 1:2¼:3½ base price. •m F.o.b. yard. •n Plus escalator clause. •o Less 2% disc. 15 days. •p Less 50¢ disc. 15 days. •q Less 2% disc. 10 days. Add 50¢ per zone. •r 2000 wgt. •s Less 5% disc. 10 days. •t Incl. 50¢ heating. •u Less 2% disc. 15th. •v Sat. del.+50¢. •w 10-100 cy. •x Del in zone 20-B. •y less 25¢, 10 days. •z less 1% in 30 days. •aa 6 bag mix

CURRENT MAXIMUM PRICES AT CEMENT MILLS: Subject to 10¢ discount, 15 days. For paper bags add 40¢ per bbl., not refundable *Prices guaranteed through December 31, 1959*

	Bulk		Bulk		Bulk		Bulk		Bulk
Richard City, Tenn	$3.45	Buffington, Ind	$3.40	Steelton, Minn	$3.45	Muskegon, Mich	3.45	Toledo, O	$3.45
Clinchfield, Ga	3.45	Independence, Kan	3.25	Leeds, Ala	3.30	Saginaw, Mich	3.45	Milwaukee, Wis	3.50
Kingsport, Tenn	3.45	Hannibal, Mo	3.35	Duluth, Minn	3.45	Wyandotte, Mich	3.45	Green Bay, Wis	3.50
West Des Moines, Iowa	3.50	Northampton, Pa	3.50	Hudson, N. Y.	3.50	Buffalo, N. Y	3.55	Ironton, O	3.45
Nazareth, Pa	3.50	Universal, Pa	3.60	Alpena, Mich	3.35	Oswego, N. Y.	3.60	Montreal City	2.56
Bath, Pa	3.50	Waco, Tex. (+ 10¢ tax)	3.35	Detroit, Mich	3.45	Cleveland, O	3.50	W. Winfield, Pa	3.60
Lesley, Pa	3.50	Giant, S. C	3.45	Howes Cave, N. Y	3.50	Alsen, N. Y.	3.50	Security, Md	3.50

PAVING BRICK, BLOCK, ASPHALT, ROAD OILS—F. O. B. CITY

	PAVING BRICK AND BLOCK			PAVING ASPHALT Per ton, less than 80 penetration		ASPHALT BINDERS—FLUXES Per gal., 80-300 penetration		CUTBACK ASPHALT MC per ton		ROAD OIL Per gal.	ASPHALT EMULSION RSI Per gal.	
	Granite Per M lots of 50,000 4x4x8 in.	Brick per M 3x4x8½ in. carload lots	Wood per sq. yd. 3½ in. 16-lb. treat	Tank car	Drums	Tank car	Drums	Tank car	Drums	Tank car	Tank car	Drums
Atlanta	e	e	e	$28.70PS	$45.00PS	$0.2340PS	$0.2335S	$0.1308wS	$0.245wS	$0.1258S	$0.1325S	$0.245
Baltimore	e	e	e	21.00r	..	09r	0.18r	09weE	.18weE	.095	.10r	0.19r
Birmingham	..	66.00s	e	26.12	25.69O	.1069	0.1093O	1162w	.1188Ow	.1006O	.1069	0.1093O
Boston	..	..	..	22.00apS	46.00apS	22.00anS	46.00anS	.105aneP	.22aneP	.14aOR	.15OR	..
Chicago	150.00‡a	95.00‡ab	3.95/4.00‡aj	22.00b	32.00b	20.40bv	30.40bv	.10bweH	.18bweH	.08b	..	..
Cincinnati	..	..	..	26.00SU	..	26.00ff	..	.1165wSU	..	.109	.1265	..
Cleveland	..	89.50‡d	6.30	26.00tA	..	26.00tvA	..	.1165twAF	..	..	.1265tA	.21A
Dallas	e	40.80p	e	26.90	46.35	.1138	.1983	30.50	52.45	.1109	.1138	.1983
Denver	..	62.00s	..	..	..	..	..	..	..	..	..	..
Detroit	..	116.00	..	30.90R	..	31.00vR	..	.1342wIR	..	1000	..	28
Kansas City	e	e	e	13.00c	..	18.00cs	..	.0825cwJ	..	.079c	0.125c	..
Los Angeles#	e	e	e	21.50dmx	..	21.50dvx	..	23.00dKx	..	22.00dwaa	23.90jXv	26.30jXv
Minneapolis	..	..	3.73h	25.00	..	26.00v	..	115w	..	0.105	.1375bb	..
Montreal	e	e	e	30.50n	43.60n	.167n	.211n	17.80nuE	22.20nuE	.155n	.242n	27nX
New Orleans	e	e	e	20.00e	..	20.00ew	..	.095ew	..	.085eB	.095eBL	1905eB
New York	..	..	3.70f	23.99mO	45.94mO	23.99wtO	45.94wtO	10.61uF	20.01uF	..	10.68u	20.11u
Philadelphia	..	..	..	18/21U	..	18/21U	..	0.085/.10FU	..	0.085/.10U	..	..
Pittsburgh	60.00k	95.00n	6.35n	31.20ix	..	31.20ixr	..	.1403‡S	..	.14‡S	.1403i	..
St Louis##	..	..	..	19.74f	21.19	.1825f	.1825	.0890f	.0915fw	0.165f	.1825O	.30R
San Francisco	..	70.00	..	22.50gdd	41.00gdd	22.50gkvdd	41.00gkvdd	22.50gNdd	46.50gNdd	23.25nWdd	23.50nXdd	2023gXdd
Seattle	..	..	..	24.00z	47.00k	33.00nzcc	38.50	25.50KE	..	28.75hvY	25.80hvX	49.80hvX
Toronto	..	135.50f‡	4.50f	41.10	60.66ee	0.2075	0.2773ee	0.222w	0.2704wee	0.233	0.218Zee	273Zee

‡ Delivered. # Add 4% sales tax. ## Add 2% intrastate sales tax. R Revised.

PAVING BRICK & BLOCK: •a Less 2% disc. 10th. •b 3 x 3½ x 8. •c 2¼ x 8¼ x 4. •d Truckload lots. •e Not used. •f 2" interior 6 lb tr. •g Less $1/Mdisc. 15th. •h 2" tr, 8 lb. •i 3 x 3⅝ x 8½. •j 2½", 6 lb. tr. •k Used. •l Redshale. •m Pine: oak $6.57. •n Truck del. •o Less $1 M disc. 15 days. •p Used: >40: new: $80.

ASPHALTS: •a F.o.b. refinery, Everett, Mass. •b F.o.b. refinery, Lockport, Ill. •c F.o.b. Sugar Creek, Mo. •d F.o.b. refinery, El Segundo. •e F.o.b. Baton Rouge. •f F.o.b. Hartford, Ill. •g F.o.b. refinery, Richmond, Calif. •h F.o.b. Martinez. •i F.o.b. refinery, Baltimore. •j F.o.b. refinery, Inglewood, Calif. •k 50-110 penetr. •l Less than 100 penetr. •m 40/300 penetr. •n F.o.b. refinery, Montreal. Fed. tax included; add 6% for mun. & prov. •o Drums not avail. Shipped in steel bbl. •p 60-70 penetr. •r In customer's drums. •s Shipped in drums, per drum. •t 150-300 penetr. •u Per 100 gal. •v Per ton. •w Per gal. •x Also tank trucks •y F.o.b. Oakland. •z F.o.b. Edmonds. •A F.o.b. refinery, Cleveland, •B F.o.b. Destrehan, La. •E RC. •F Also RC. •G Also MS •H RC 0-5 incl. •I MC 4. •J MC, RC $0.095. •K MC 3, 4, & 5. •L MS. •M MC 1-5, RC 1-5, $0.0918. •N MC 3. •O Truck-load. •P F.o.b. refinery, Atlanta. •Q F.o.b. Eldorado, Ark. •R Delivered within 50 mi. •S Less 2% disc. 10 days, net 30. •T Less 1% disc. 10 days. •U F.o.b. refinery. •V Less 2% disc. 15 days. •W SC 2. •X RS 1. •Y SC 1. •Z Incl. 10% Sales Tax. •aa SC 3, 4, & 5. •bb RS 3. •cc In used drums. •ddl ess disc of $1 ton. ee 45 Imp. gal. drums •ff 60-150 penetration

See following ENR issues for OTHER PRICES:

- Wood Products, Glass, Explosives, Chemicals: Last, Dec. 24; Next, Jan. 21.
- Clay Products, Lime, Plaster, Paint, Roofing: Last, Dec. 17; Next, Jan. 14.
- Iron & Steel Products, Pipe: Last, Dec. 24; Next, Jan. 28.

3 WAYS BETTER
VOSS
BRIDGE and STRUCTURAL BEARING PADS
- LOW INITIAL COST
- EASY TO INSTALL
- FREEDOM FROM MAINTENANCE

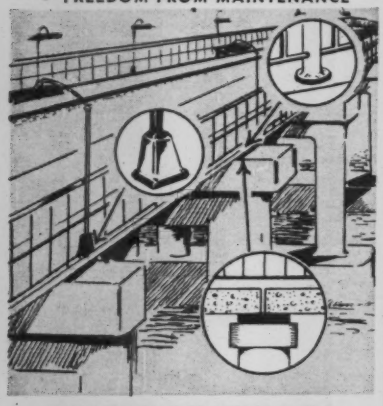

NEOSORB
NEOPRENE AND
SORBTEX
PREFORMED FABRIC

Meet All State and Federal Specifications

- For pre-cast, cast-in-place, pre-stressed and steel construction.
- Made to meet the shape, grade, skew conditions of your contract.
- Ideal for expansion joints, lighting standards, hand rail posts.

Join the many consulting engineers and contractors specifying VOSS Bridge and Structural Bearing Pads. Send us your job specifications, and we will promptly forward quotations, samples and engineering data.

VOSS ENGINEERING, INC.
5647 North Ravenswood Ave.
Chicago 26, Illinois

Please send samples and data on VOSS NEOSORB Neoprene and VOSS SORBTEX Preformed Fabric Bearing Pads.

Name_____

Company_____

Street_____

City_____ State_____

Construction Reports

Bids Asked—Low Bidders—Contracts Awarded—

Compiled by Business News Department—Engineering News-Record, 330 W. 42nd St., New York 36, N. Y., ELSIE EAVES, Manager

J. A. MAHONEY, M. WETZEL, M. E. SCIORRA, MARIE MORAVSIK, ELAINE CHOMYAK, ELIZABETH WERRA, ELEANOR QUERET, Reports, J. H. WEBBER, E. R. HUBER, Statistics.

MIDDLE ATLANTIC

BUILDINGS—SLC

▲ **N. J., Princeton**—LABORATORIES, etc.—American Cyanamid Corp., 30 Rockefeller Plaza, New York, N. Y., soon lets contract 2 laboratories, cafeteria, Quaker Bridge Rd., and Rte. 1, West Windsor Twp., $4,000,000-$5,000,000. Voorhees, Walker, Smith, Smith & Haines, 101 Park Ave., New York, N. Y., archts.-engrs.

HEAVY CONSTRUCTION—LB & CA

▲ **Constr. Aggregates Corp.,** 1 E. 42 St., New York 17, N. Y., LB **$5,000,000,** (7 bidders), fill for Elizabeth-Port Auth. piers, Contr. EP-110.002, ELIZABETH, N. J. Port of New York Auth., 111 Eighth Ave., New York 11, N. Y. Bids Dec. 22. CD 12/3.

† **Merando, Inc.,** 4098 Minnesota Ave. N.E., Wash., D. C., CA **$622,140,** two 40-man officers quarters, John Tower's Field, ENG-49-080-60-4(4), ANDREWS AIR FORCE BASE, MD. U. S. Eng., First and Douglas Sts. N.W., Wash. 25, D. C. Bids Nov. 24. CD 11/30, under LB.

Roy Ryan Sons Co., Inc., 5416 Boonville Highway, Evansville, Ind., LB **$886,642,** (6 bidders), Michigan Ave. storm drains between Bunker Hill Rd. and Perry St. N.E., WASH., D. C. D. C. Govt., Dpt. Sanitary Engineering, 499 Pa. Ave. N.W., Wash., D. C. Bids Dec. 22. CD 12/14.

BUILDINGS—LB & CA

Green Tree Manor Homes, c/o John J. Braglia, 169 Old Country Rd., Hicksville, N. Y., Owner Builds, **$750,000,** 50 HOUSES, 16th St. west of Broadway, HICKSVILLE, N. Y

SOUTH

BUILDINGS—BA

▲ **Va., Richmond**—TREATMENT CENTER—BA 1/13—Dpt. Mental Hygiene & Hospital, State Office Bldg., Va., treatment center for children. $1,000,000.

▲† **W. Va., Martinsburg**—POST OFFICE and COURTHOUSE—BA 1/26—General Services Admin., Regional Office Bldg., Room 7122, 7th and D Sts. S.W., Wash., D. C., 4 story, bsmnt., penthouse, concrete fdns., concrete frame post office and courthouse, appr. No. 47x1147, Proj. No. 46906, Contr. No. GS-R3-B-7838. Plans deposit $75. CD 1/30.

BUILDINGS—LB & CA

▲ **G. Lloyd Preacher Jr. & Co.,** Bona Allen Bldg., Atlanta, Ga., CA **$1,100,000,** 95,500 sq. ft. SHOPPING CENTER, MABLETON, GA. H. W. Dunn, Mableton, Ga.

Southern Constr. Co., Box 1307, Augusta, Ga., LB **$953,285,** (17 bidders), MEDICAL and SURGICAL BLDG., G. Pierce Wood Memorial Hospital Carlstrom Field, ARCADIA, FLA. Bd. Comrs. State Institutions, Tallahassee, Fla. Bids Dec. 17. CD 11/19.

Paul L. Beck Constr. Co., 4914 1 Ave. S., St. Petersburg, Fla., LB **$646,927,** concrete frame; alt. **$580,000** steel frame, North Fort Myers JUNIOR High SCHOOL, Orange Grove Blvd., North Fort Myers, FORT MYERS, FLA. Lee Co. Bd. P. Instruction, Fort Myers, Fla. Bid Dec. 15. CD 12/3.

▲ **Mills & Jones,** 400 23 St. S., St. Petersburg, Fla., CA **$1,000,000,** 120,000 sq. ft. SHOPPING CENTER, parking for 678 cars, ST. PETERSBURG, FLA. Grand Union Stores, 9 St. and 62 Ave. North (Eastern Shopping Centers, Inc.), 5301 NW 37 Ave., Miami, Fla. Awarded Dec. 18. CD 12/15.

Coastwide Constr. Co., 1005 Beach Dr. N., St. Petersburg, Fla., CA **$925,000,** 9 story, 44-unit APARTMENT, ST. PETERSBURG, FLA. Brightwaters Towers of Snell Isle, Inc., 1365 Snell Island Blvd., St. Petersburg, Fla. F. W. Schlotterlein, c/o J. H. Romoser, 1333 Snell I Blvd. N. E., St. Petersburg, Fla. CD 12/29.

▲ **Settecasi & Chillura,** 2101 5 Ave., Tampa, Fla., CA **$1,036,990,** est. $970,000. C. Leon King HIGH SCHOOL, 6815 56 St., TAMPA, FLA. Hillsborough Co. Bd. P. Instruction, County Courthouse, Tampa, Fla., Bids Dec. 1, awarded Dec. 15. CD 12/8, under LB.

A. D. Kendrick, Box 217, Zachary, La., CA **$654,500,** RECEIVING and REHABILITATION STATION, East Louisiana State Hospital, JACKSON, LA. State Div. of Administration, Baton Rouge, La. CD 12/1, under LB.

MIDDLE WEST

BUILDINGS—SLC

▲ **O., Cleveland**—SCIENCE CENTER—Western Reserve University, 2040 Adelbert Rd., Zone 6, soon lets contract science center, $5,494,770. Small, Smith, Reeb & Draz, 1010 Euclid, Zone 15, archts. CD 11/19/58.

HEAVY CONSTRUCTION—LB & CA

Consolidated Constr. Co., 221 N. LaSalle St., Chicago, 1, Ill., LB **$818,690,** terminal facilities, two 150 x 750 substructures, Chicago-O'Hare International Airport Park Ridge, CHICAGO, ILL. Dpt. Purchases, City Hall, Chicago 2, Ill. Bids Dec. 16. CD 12/4/58.

▲ **Santucci Constr. Co.,** 5115 Church St., Skokie, Ill., LB **$1,998,822,** (6 bidders), 144 in. main sewer in S. Pennsylvania Ave. from Puetz Rd. to Drexel Ave., Oak Creek, MILWAUKEE, WIS. Metropolitan Sewerage Comn. of the County of Milwaukee, P. O. Box 2079, Milwaukee, Wis. Bids Dec. 21. CD 11/24.

BUILDINGS—LB & CA

J. C. Breyfogle, 37 N. 3rd St., Columbus, O. CA Est. **$650,000,** design and construct BOWLING CENTER, OFFICES AND YOUTH HEADQUARTERS FOR CHURCH, CUYAHOGA FALLS, O. Temple Plaza, Inc., c/o Rev. Rex. Hymbard, Calvary Temple, Cuyahoga Falls, O. CD 6/4/57.

† **Maxon Constr. Co.,** 26 Far Hills Ave., Dayton 19, O. LB **$749,584,** Est. $777,777, (9 bidders), 2 story, 41 x 260 ft. SPECIAL LABORATORY ANALYSIS BLDG. 828 (ATIC) addn., 2nd story addn. to existing bldg. Wright Patterson Air Force Base, ENG-15-029-60-8, DAYTON, O. U. S. Eng., 237 4th Ave., Huntington, W. Va. Bids Dec. 15. CD 11/16.

MISSISSIPPI TO ROCKIES

HEAVY CONSTRUCTION—LB & CA

▲ **MISSOURI**—State Hy. Dpt., Jefferson City, Bids opened 12/17,

Mo.—J. A. Tobin Constr. Co., 3701 Rainbow Blvd., Kansas City, Kan., LB **$1,240,347,** (6 bidders), 2-24 ft. concrete pavts. 6.361 mi., Buchanan Co.; LB **$1,084,823,** (11 bidders), graded earth, culverts, two multi lanes concrete pavt. sep. by median 0.904 mi., Jackson Co.; LB **$1,274,991,** (5 bidders), 2-24 ft. concrete pavts. 6.82 mi., Buchanan Co.;

Mo.—Missouri Petroleum Products Co., 1620 Woodson Rd., Overland 14, Mo., LB **$256,198,** (9 bidders), 24 ft. b. conc. resurf. 20.309 mi., New Madrid Co.; LB **$185,741,** (9 bidders), 24 ft. b. conc. resurf. 9.846 mi., Butler Co. CD 11/18.

Crawford Electric Co., North Platte, Neb., CA **$886,920,** 161,000 volt transmission line between Omaha, Neb., and Salix, Iowa, NEBRASKA and IOWA, Omaha Public

PROJECTS COVERED

By Size

Construction projects here reported cover the United States and Canada, are of these minimum sizes or larger: water supply, earthwork, waterways $53,000, other public works $86,000, industrial buildings $110,000; other buildings $400,000. Also Foreign projects of $1,000,000 and more in size of Interest to American contractors.

By Regions & Classes of Construction
(In order of Listing)

BIDS ASKED
LOW BIDDERS
CONTRACTS AWARDED
New England — **Middle West**
Middle Atlantic — **Mississippi to Rockies**
South — **Far West**
PROPOSED WORK
Water Supply — **Public Buildings**
Sewers, Waste Disposal — **Mass Housing**
Bridges — **Commercial Buildings**
Streets & Roads — **Industrial Buildings**
Earthwork, Waterways — **Unclassified**

In These Stages

PROPOSED WORK: Before and including appointment of engineers or architects.

BIDS ASKED: BA (new announcements only). For full calendar, see also preceding issues.

SOON LETS CONTRACT: SLC

LOW BIDDERS: LB On jobs below $500,000 in value all low bidder news will be the final reports published on the projects involved except where award is not made to the low bidder. In this case, a supplementary contract award report will be published.

CONTRACTS AWARDED: CA Except awards to low bidders previously reported in low bidder stage.

CD dates shown are of Construction Daily issue in which last previous report was published.

OWNERS, ENGINEERS, ARCHITECTS, CONTRACTORS are invited to report their new jobs for listing in these reports when they meet or exceed the size minimums shown above. Address these news releases to J. A. Mahoney, REPORTS, ENGINEERING NEWS-RECORD, 330 W. 42 St., New York 36, N. Y.

Symbols and Abbreviations Include:

† Federal Government
▲ Project of $1,000,000 or over
ENR Engineering News-Record
CD Construction Daily

For additional reports see Construction Daily.

Power Dist., 803 Electric Bldg., Omaha, Neb. Bids Dec. 1, awarded Dec. 17. CD 12/18, under LB, Nebraska.

Clark Constr. Co., Eldon, Mo., CA **$868,689**, Sewerage Sys. Imprvs., Part I, lift station force main and primary treatment facilities, ATCHISON, KAN. City, City Hall, Atchison, Kan. Bids Nov. 25. CD 12/21, under LB.

BUILDINGS—LB & CA

▲ **Krebs Constr. Co.**, 3650 W. 11th St., Houston, Tex., LB **$2,199,500**, Base Bid, 4 ELEMENTARY SCHOOLS, 1 at Ringgold and Lawn and Banjo; 1 at Stancliff and Sims Drive; 1 at Bellfort Drive and Comal St., other at Telephone Rd. and Westover, HOUSTON, TEX. Houston Ind. School Dist., 1300 Capitol, Houston, Tex. Bids Dec. 17. CD 11/18.

FAR WEST

BUILDINGS—BA

▲† **Calif., Camp Irwin**—HOUSING—BA On Or About 1/28—U. S. Eng., 180 New Montgomery St., San Francisco, Calif., 140 units Capehart Housing, ENG-04-203-60-17B. Extended date. $2,000,000. CD 12/18.

HEAVY CONSTRUCTION—LB & CA

▲ **CALIFORNIA**—State Div. Hys., 1120 N. St., Sacramento,

Madonna Constr. Co., P.O. Box 910, San Luis Obispo, Calif., CA **$1,481,509**, grading, surf. 2.3 mi. 4 lane freeway US Hy. 101 through Pismo Beach, incl. traffic separation bridges and interchange facilities, bridges to carry Hinds Ave. traffic over freeway, bridge to take freeway over Wadsworth Ave. and pedestrian undercrossing at Pismo St., San Luis Obispo Co. Bids Dec. 9. CD 12/15.

▲ **Macco Constr. Co.**, 14409 South Paramount Blvd., Paramount, Calif., CA **$2,361,267**, bulkheads and sanitary sewers, Marine del Rey Small Boat Harbor, Spec. 1979-CSD, LOS ANGELES, CALIF. Bd. Supervs. Los Angeles County, 501 Hall of Records, Los Angeles, Calif. Bids Nov. 12. CD 11/17, under LB.

BUILDINGS—LB & CA

▲ **M & K Corp.**, 519 Calif., San Francisco, Calif., CA **$1,148,000**, general contract, 6 story LIBRARY addn., San Jose State College, SAN JOSE, CALIF. State Div. Architecture, 1120 N. St., Sacramento, Calif. Bids Dec. 15. CD 12/18, under LB.

Butte Development Co., 1315 S. Broadway Blvd., Santa Maria, Calif., CA **$885,111**, 65 frame, stucco DWELLINGS, S. Allston Way, W. Enos Ave., S. Thorbury St., SANTA MARIA, CALIF.

Pacific Coast Builders, 1 South Park, San Francisco, Calif., LB **$747,000**, Base Bid, 50,000 sq. ft. prestressed concrete, Mango Ave. SCHOOL, SUNNYVALE, CALIF. Sunnyvale Elementary School Dist., 2 S W. McKinley Ave., Sunnyvale, Calif. Bids Dec. 16. CD 12/3.

PROPOSED PROJECTS

WATER SUPPLY

▲ **Va., Norfolk**—Dpt. P. Wks. City, City Hall, reservoir and dam, Western Branch of Nansemond River, **$3,000,000**, CD 10/17/50; water distr. lines extension annexed area, **$3,150,000**; Moores Bridge Water Filtration Plant Unit, **$1,500,000**.

SEWERS, WASTE DISPOSAL

▲ **Va., Chesterfield**—Bd. Supervs. Chesterfield Co. bond election Feb. 2, sewerage system, **$11,775,000**. R. Stuart Royer & Assocs., 15 W. Cary St., Richmond, consult. engrs.

STREETS AND ROADS

▲ **Alta., Calgary**—City, City Hall, street constr. 1960, **$3,590,245**; four-lane Macleod Trail freeway, service roads along Macleod Trail from 58th to 82nd Aves., **$573,000**.

AIRPORTS

▲† **Mont., Glasgow**—DEFENSE AREA CLASSIFIED FACILITIES—U. S. Eng., 1519 S. Alaskan Way, Seattle 4, Wash., plans by Orr Pickering & Assocs., Fratt Bldg., Billings, classified facilities in Glasgow defense area. Over **$1,000,000**. Bids next March. CD 9/28.

▲† **Mont., Great Falls**—DEFENSE AREA CLASSIFIED FACILITIES—U. S. Eng., 1519 S. Alaskan Way, Seattle 4, Wash., plans by Brinkman & Leon, Strand Bldg., Kalispell, classified facilities in Malmstrom defense area. Over **$1,000,000**. Bids in February. CD 9/9/58.

▲ **B. C., Vancouver**—JET MAINTENANCE BASE—Trans-Canada Air Lines, 1080 University, Montreal, Que., plans by H. N. Semmens & Assocs., 1272 W. Pender, steel, concrete jet maintenance base, Millwright shop, stores, 2 story office block, hangars, Vancouver International Airport, $2,000,000. Phillips, Barratt & Partners, 2090 W. 4th St., engrs.

PUBLIC BUILDINGS

▲ **Ala., Tuscaloosa**—RESIDENCE HALL—University of Alabama, plans by Wilmot C. Douglas-Carl Moseley, Jr., 2922 7 Ave. S., Birmingham, men's residence hall, $2,000,000.

▲ **Calif., Berkeley**—EARL WARREN LEGAL CENTER—Regents of University of California, Admin. Bldg., Earl Warren Legal Center, incl. conference hall,

(Continued on page 56)

Process Trends from **DORR-OLIVER**

A SERVICE TO THE PROCESSING INDUSTRIES

WHAT'S NEXT IN SOLIDS FLUIDIZATION?

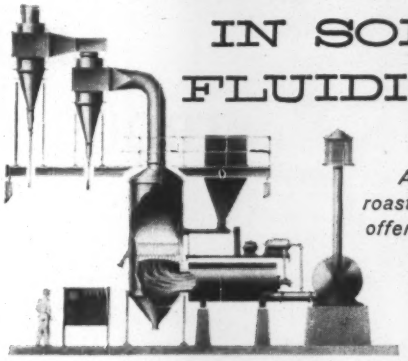

A versatile drying, roasting and calcining technique offers opportunities in chemical processing. Here's a report on developments.

Since Dorr-Oliver first introduced the fluidization technique for non-catalytic applications more than ten years ago, our engineers have been constantly investigating its wide potentialities. From such well established operations as the roasting of sulphide ores, SO_2 production for acid manufacture, drying of fine coal and drying and sizing of lime stone, development is now extending into many fields of chemical processing.

The advantages of FluoSolids®, Dorr-Oliver's system for fluidized bed techniques, are its essential simplicity, its compactness, its low operating and maintenance costs, its ability to take wide feed variations and its inherent adaptability to precise temperature control with simple instrumentation. It has proved particularly effective in drying wet, sticky or otherwise difficult-to-handle materials. In some drying operations, the added benefit of classification by particle size is possible.

At D-O's research and development center, Westport, Connecticut, hundreds of test runs covering many possible new applications have been completed. Typical of these are the drying of heat sensitive polymers, hydrochloric acid and sodium sulphate production by the Hargreaves Process, drying of sodium chlorate crystals and potassium silicon fluorides, drying of chemical precipitates, roasting of furfural residues, and low temperature calcination of phosphates. Opportunities for still further development are far from exhausted.

To sum it up: if you want a continuous, high capacity method of drying or heat treating materials . . . if precise and completely uniform temperatures are needed to prevent, induce, or control chemical or physical action . . . if intimate contact of gases with solids is a necessary part of your processing . . . maybe the Dorrco FluoSolids System is your answer.

Chances are that our engineers have already been working on just such a problem as yours. If they haven't, the information and experience now available should at least provide a good starting point for investigation and evaluation. An inquiry costs nothing — and it may open up mutually rewarding opportunities. Dorr-Oliver Incorporated, Stamford, Connecticut.

Dorr-Oliver offers a wide range of equipment, methods and complete systems for the processing industries. Operations include:

ROASTING • DRYING • CALCINATION • CLASSIFICATION • THICKENING • SCREENING • FILTRATION • CLARIFICATION • WASHING • AGITATION • CENTRIFUGATION • ION EXCHANGE • PUMPING

TRUSCON TUNNEL LINER PLATES ELIMINATE COSTLY, TROUBLESOME DETOURS

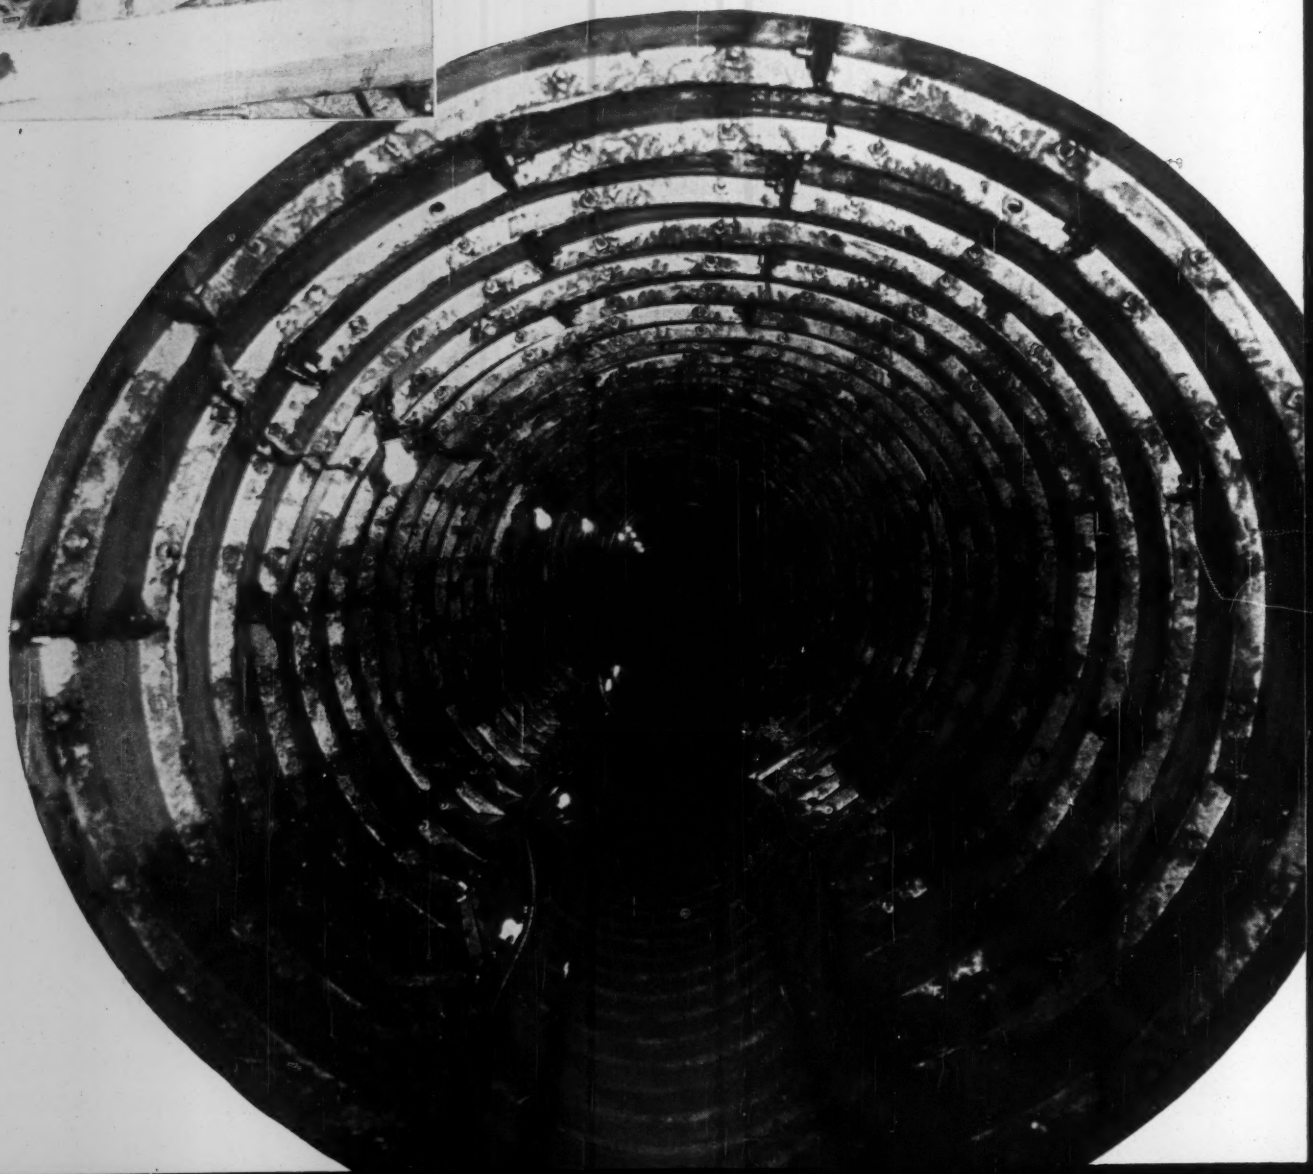

Truscon Tunnel Liner Plates are designed with economy, speed, and safety in mind. Widely used and accepted by leading engineers and contractors in railroad, sewer, water, and highway tunnels, as well as for caissons, shafts, mine entrances, and other underground installations.

Tunneling avoids the high cost of destroying and replacing expensive pavements and tract structure. Eliminates costly and troublesome detours. Keeps traffic flowing smoothly on busy streets and highways.

Truscon Tunnel Liner Plates meet all engineering requirements. Extra thick and strong. Four flange, plus four solid right angle corner construction. Easily handled and readily bolted in place. Universally used and accepted throughout the country.

Furnished in either black steel, or with a strong tight coat of hot dipped galvanizing. Also furnished asphalt coated, or galvanized and asphalt coated. Truscon Tunnel Liner Plates are engineered and fabricated to the specific requirements of your project. Call your Republic-Truscon representative, or write today for additional facts.

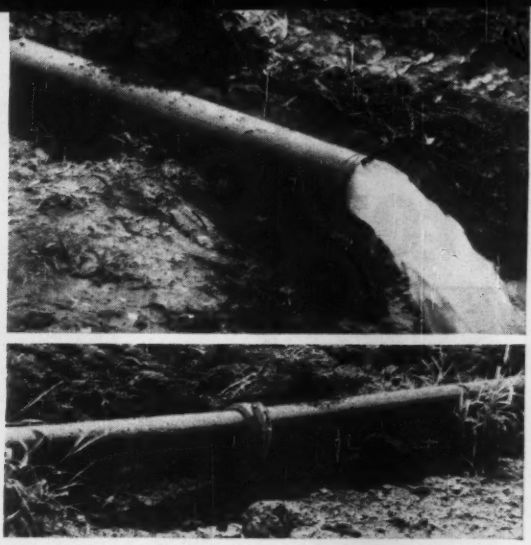

REPUBLIC ELECTRUNITE® GROOVED-END TUBING solves fluid handling problems, saves installation time, cuts operating costs. Joining is quick and easy. No threads to cut, no welds to make. The mill formed groove-end combines with a variety of available fittings and couplings to make up a piping system in minutes. Lightweight portable grooving tools are available for field forming grooves on field-cut tubing. Write for more information.

REPUBLIC ELECTRIC RESISTANCE WELD LINE PIPE eliminates danger of burn-throughs. Made from prime, flat-rolled carbon steel. Checked for defects as only flat-rolled steel can be checked. Absolute uniformity in wall thickness, roundness, and concentricity assures faster line-up of joints, better field welds. High ductility makes for trouble-free bending in field or shop. Send coupon for data.

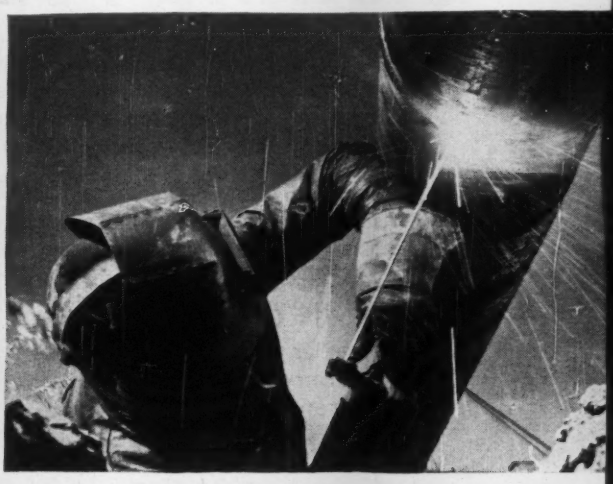

REPUBLIC SECTIONAL PLATE PIPE, another Republic Product used in underground installations. Fast, easy assembly saves time and money. Engineered and fabricated at the factory—is easily assembled on the job with a minimum of labor and equipment. That is why full round pipe of 12-gage plates, 84″ in diameter, was used to construct the above 90-foot cattle pass near Boise, Idaho. Note sloped ends to conform to embankment. For complete information, call or write today.

REPUBLIC STEEL

World's Widest Range of Standard Steels and Steel Products

REPUBLIC STEEL CORPORATION
DEPT. EN-8752
1441 REPUBLIC BUILDING • CLEVELAND 1, OHIO

Please send more information on the following products:

- ☐ Truscon Tunnel Liner Plates
- ☐ Republic Sectional Plate Pipe
- ☐ Republic ELECTRUNITE Grooved-End Tubing
- ☐ Republic Electric Resistance Weld Line Pipe

Name_____ Title_____

Firm_____

Address_____

City_____ Zone____ State_____

SOLVE YOUR

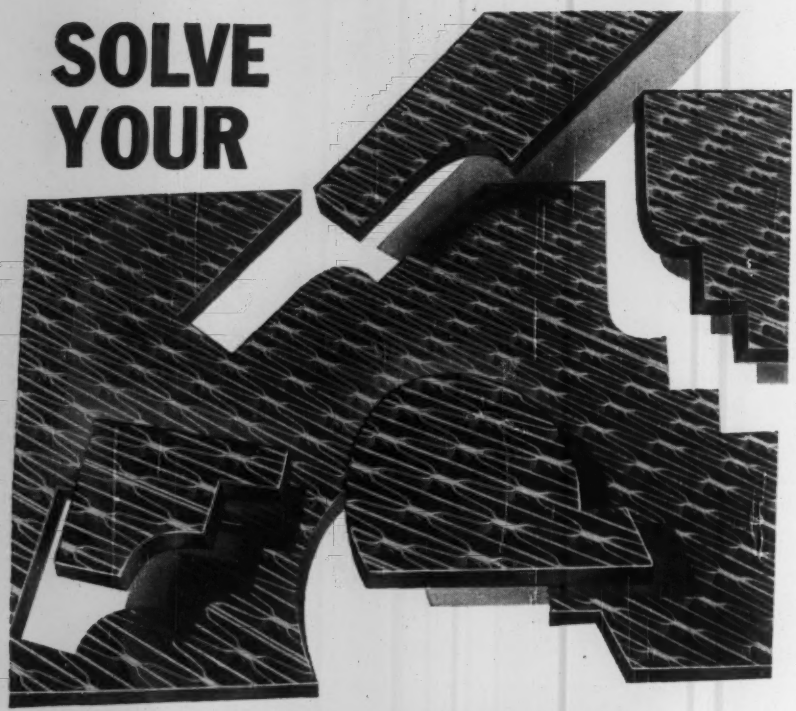

GRATING PUZZLE

If you need a grating that must fit around pipes and other objects, like a complicated jig-saw puzzle, there's one way you can be sure of getting panels that will fit perfectly into place—specify IRVICO.

IRVICO'S precise, custom fabrication eliminates costly field corrections and unnecessary handling of material. The grating is made in accordance with drawings approved by you. To assure easy installation, each panel is clearly marked to conform with erection drawings.

Whether your grating "puzzle" is simple or complex, you can depend on IRVICO to solve it so you can save time and money.

Write today for more information, or contact your Irving sales engineer, listed in the local phone directory.

Catalog on request

IRVICO **IRVING SUBWAY GRATING CO., Inc.**

The ***ORIGINATORS*** *OF THE GRATING INDUSTRY*
EST. 1902

Offices and Plants at: 5063 27th St., LONG ISLAND CITY 1, N. Y.
1863 10th St., OAKLAND 20, CALIFORNIA

(Continued from page 53)

auditorium, seminar rooms, research offices and rooms, law students dormitory, dining rooms, etc. **$1,350,000.**

▲ **Calif., Los Angeles**—SCHOOL—Bd. Educ., 1425 S. San Pedro St., plans by Austin Field & Fry, 2311 W. 3rd St., Carson High School. **$4,200,000.** CD 6/9/58.

▲ **Colo., Thornton**—SCHOOL—School Dist. No. **12,** 810 Eppinger Blvd., plans by Atchison & Kloverstrom, 257 Josephine, Denver, elementary school, high school. **$1,975,000.** CD 10/15.

▲† **Idaho, Arco**—EXPERIMENTAL ORGANIC COOLER REACTOR—Atomic Energy Comn., Idaho Operations Office, Idaho Falls, experimental organic cooler reactor, National Reactor Testing Station. **$6,000,000.** Fluor Corp. Ltd., 2500 Atlantic, Los Angeles, Calif., engrs. CD 7/29.

▲ **Ill., Moline**—SCHOOL—School Dist. of Moline, voted **$1,850,000** bonds Nov. **17, Junior High School.** Bids in summer. CD 11/11.

▲ **Md., Catonsville** — ACTIVE TREATMENT BLDG., etc.—State, Dpt. P. Imprvts., 506 Park Ave., Baltimore, Zone 1, active treatment bldg., **$1,400,000;** administrative services bldg., **$1,300,000;** infirmary, **$1,200,000,** Spring Grove Hospital, for Dpt. Mental Hygiene.

▲ **Mass., Woburn**—SCHOOL—City, City Hall, plans by Edward J. Tedesco, 15 Pleasant St., high school, off Salem St. **$3,500,000.** Constr. 1960. CD 10/23.

▲ **Mo., Ferguson (St. Louis 35 P.O.)**—SCHOOLS—Ferguson-Florissant School Dist. R-2, Bd. Educ., 655 January Ave., Zone 35, **$4,000,000** bond election Feb. 14, McCluer Junior High School addn., 1890 S. Florissant Rd., Florissant, **$1,900,000;** Junior High School adjacent to 2800 Parker Rd., **$1,900,000.** Charles W. Lorenz, 700 N. Ballas Rd., Kirkwood 22, Mo., archts.

▲ **Mont., Missoula**—HEALTH SCIENCE—Montana State University, plans by Witwer & Price, 107 E. Main St., 5 story health science. **$1,500,000.**

▲ **Neb., Omaha**—SCHOOLS—Bd. Educ., 3902 Davenport St., Junior High School, elementary school, Southeast area, **$1,500,000;** Bancroft School remodeling, 8th and Bancroft Sts., **$500,000;** school replacing Florence School, 36th and King Sts., **$500,000;** elementary school, 48th St. and Redick Ave., **$550,000;** elementary school, 112 and Leavenworth Sts., **$500,000.** CD 11/28/55.

▲ **N. Y., Massapequa**—SCHOOL—Bd. Educ. Union Free School Dist. 23, referendum vote Jan. 16, Alfred G. Berner Junior High School, Carmens Rd., Sunrise Hy. and Merrick Rd. **$5,545,000.** George J. Dippel, 187 Brooklyn Ave., archt.

▲ **N. Y., Mineola**—COURT HOUSE—County Executive, Nassau County, Old County Courthouse, courthouse addn. **$4,740,000.** To go ahead 1960.

▲ **N. Y., Mount Vernon**—SCHOOL—Bd. Educ., 257 Fourth Ave., voted bonds Dec. 16, A. P. Davis High School. **$7,200,000.** CD 11/27.

▲ **Tex., Fort Worth** — CRIMINAL COURTS — Tarrant County, Courthouse, plans by Easterwood & Easterwood, 522 N.P. Anderson Bldg., 5 story Criminal Courts, addns. and expansions, **$2,000,000.** CD 6/23.

▲ **Wash., Seattle**—CITY HALL-OFFICE—City, City-County Bldg., plans by Theo Damm, 516 James St., Seattle, and J. N. McCammon, Meadows Bldg., Dallas, Tex., city hall-office, 4th and Cherry St. **$4,000,000.** Previous plant for design-construct. Plan abandoned. CD 10/13, under LB.

▲ **Wis., New Berlin**—SCHOOL—New Berlin Union High School Dist. 5, 2125 Meadowmere Parkway, plans by R. N. LeVee & Assocs., 1000 W. College Ave., Appleton, high school. **$2,400,000.**

▲ **Wis., West Bend**—COURTHOUSE, etc.—Washington Co. plans by R. R. Gauger & Co., First Federal Bldg., St. Paul, courthouse and jail. **$1,500,000.** CD 5/13.

COMMERCIAL BUILDINGS

▲ **Calif., Oakland**—MOTOR-HOTEL—Linn C. Alexander & Assocs., Developer, Russ Bldg., San Francisco, Calif., plans by James D. Barrington, 305 North Santa Anita, Arcadia, "Oakland Edgewater Motor Hotel", incl. swimming pool, parking, Hegenberger Rd. **$1,500,000.** CD 4/24.

▲ **Conn., Hartford**—OFFICE—Connecticut Bank & Trust Co., 560 Main St., plans by Charles F. DuBose, 95 Woodland St., 16 story, 250,000 sq. ft. office, Front and Market Sts., Constitution Plaza. **$6,500,000.** Emery Roth & Sons, 575 Madison Ave., New York, N. Y., consult. archts. Kahn & Jacobs, 2 Park Ave., New York, N. Y., assoc. archts. CD 11/25.

▲ **Conn., Middletown**—DORMITORIES—Wesleyan University, University Drive, plans by Charles H. Warner, Jr., Castle Heights Ave., Upper Nyack, N. Y., dormitories, **$2,000,000.** Brown, Lawford & Forbes, 224 E. 46 St., New York, N. Y., assoc. archts. Clark & Rapuano, 830 Third Ave., New York, N. Y., landscape archts. CD 12/9.

▲ **Conn., New Haven**—APARTMENT—University Towers, Inc., 420 Lexington Ave., New York, N. Y., plans by Kahn & Jacobs, 2 Park Ave., New York, N. Y., 16 story apartment, George St., Oak St. Redevelopment Area. **$1,750,000.** Fred S. Dubin Assocs., 178 S. Whitney St., Hartford, consult. engrs. Garfinkle & Marenberg, 24 W. 45 St., New York, N. Y., structural engrs. CD 11/5.

▲ **Conn., Westport** — SHOPPING CENTER — Village Square, Main St., shopping center. **$2,000,000.**

▲ **Ky., Louisville**—RESIDENTIAL DEVELOPMENT—Edgar W. Archer, 489 Roberts Ave., 100 unit subdivision residential development. **$1,500,000.**

KERN INSTRUMENTS

RIGHT for the JOB

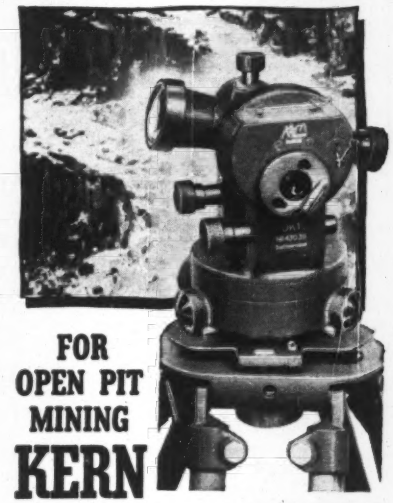

FOR OPEN PIT MINING KERN DKI THEODOLITE

Down-to-fundamentals design ... made for portability, rugged use ... Precision results in simplest, quickest way.

Only 6 lbs. in weight, 7" high, including carrying case.

READINGS at a GLANCE

- Fast, effortless operation.
- Direct to 10', Estimation to 1'.
- Automatically gives arithmetic mean of two readings at opposite circle points

FOR UNDERGROUND OPERATION

- Illuminated Traverse Targets easily interchanged with instrument.
- Water and dust-proof.
- Exceptional clarity of optical system—50% brighter image through Kern AR coating.

★

Write for Brochure DK 518-1

PROMPT, RELIABLE SERVICE
FACTORY TRAINED PERSONNEL

KERN and ONLY KERN OFFERS YOU the LATEST DESIGNS of

Dr. Henry Wild

Kern SWISS

The FINEST in SURVEYING EQUIPMENT

KERN INSTRUMENTS INC.
120 Grand St., White Plains, N.Y.

▲ **Mass., Boston**—HOSPITAL—Beth Israel Hospital, 330 Brookline Ave., plans by Ellerbe & Co., 333 Sibley St., St. Paul, Minn., hospital addn., alterations. $2,000,000. Constr. 1960.

▲ **Mass., Medford** — DORMITORIES, etc. — Tufts University Bd. Trustees, Admin. Bldg., plans by Perry, Shaw, Hepburn & Dean, 31 St. James Ave., Boston, women's dormitory, men's dormitory addn., dining hall, $3,000,000; biology bldg. addn., Campus, $400,000. Constr. 1960.

▲ **Minn., Maplewood**—HEADQUARTERS—Minnesota Mining & Mfg. Co., 900 Bush Ave., St. Paul, plans by Ellerbe & Co., 333 Sibley St., St. Paul, 14 story headquarters. $10,000,000. Constr. to begin soon, completion 1962.

▲ **Minn., St. Anthony** — SHOPPING CENTER — Apache Realty Co., 523 Marquette Ave., Minneapolis, plans by W. Thorsen, 124 South Fourth St., Minneapolis, 400,000 sq. ft. shopping center, N.E. 37th Ave. between Silver Lake Rd. and Stinson Blvd. $7,000,000. Constr. early 1960.

▲ **Mo., Columbia**—HOME, etc.—St. Louis Christian Home, 3033 N. Euclid Ave., St. Louis, Zone 15, plans by P. John Hoener, 4227 Watson Rd., St. Louis, Zone 9, home for 200 mentally and physically retarded children, incl. chapel, administration and diagnosis bldg. and school, Hy. 63, adjacent to Lenoir Home. $1,500,000.

▲ **N. J., Trenton**—STORE—Lit Bros., Broad and Front Sts., plans by Thalheimer & Weitz, 1315 Walnut St., Phila., Pa., department store, supermarket, shops, office and mall, South Broad, South Warren Sts. and Assunpiuk Way. $3,000,000.

▲ **N. Y., Amherst**—HOMES—Juette Builders, 20 Coronation Dr., 100-home Hartford Estates addn. $2,000,000.

▲ **N. Y., Niagara Falls**—HOSPITAL—Mt. St. Mary's Hospital, Sixth St., hospital. $5,000,000.

▲ **Pa., Jenkintown**—APARTMENTS and OFFICE—Foxcroft Bldg. Corp., Benson Apartments, Jenkintown, apartments and office, Meetinghouse Rd. $10,000,000.

▲ **Tex., Fort Worth**—RESIDENCES—W. P. Martin, Euless, 125 brick veneer residences, Oak Crest Estates No. 2, $2,000,000. J. R. Dunaway, 1220 W. Drew, consult. engr.

▲ **Tex., Houston**—OFFICE—L. & R. Bldg. Co., c/o Century Bldg., plans by Lloyd & Morgan, 4605 Montrose Blvd., 13 story masonry office, Travis and Gray Sts. $2,500,000. Constr. in Spring. CD 10/22.

▲ **Tex., Houston**—APARTMENT—James A. McBride & Wilfred P. Bonin, 3831 N. Braeswood Blvd., plans by MacKie & Kamrath, 2713 Ferndale St., and James A. McBride, Proj. Assocs., 2713 Ferndale St., 24 story, 150-unit masonry apartment, Smith St. and Polk Ave. $2,750,000. Walter P. Moore, No. 2 Pinedale Pl., consult. engr. CD 12/15.

▲ **Va., Roanoke and Salem**—SHOPPING CENTER—Lee-Hi Shopping Center, Inc., 3318 Brandon Rd., Roanoke, shopping center between Roanoke and Salem. $2,500,000.

▲ **Newfoundland, St. John's**—HOSPITAL—Roman Catholic Episcopal Corp., St. Claire's Mercy Hospital, 6 story hospital wing addn. $1,250,000.

INDUSTRIAL BUILDINGS

▲ **Ind., Jeffersonville**—PLANT—Hooker Chemical Corp., Phosphorous Div., Box 344, Niagara Falls, N. Y., potassium phosphate plant.

▲ **N. Y., Macedon**—RESEARCH AND TECHNICAL SERVICE CENTER—Kordite Corp., 3848 Richard St., 2 story, 50,000 sq. ft. research and technical service center. $2,000,000. United States Industrial Chemicals Div., Natl. Distillers Chemical Corp., 1217 Section Rd., Cincinnati, O., engrs. Bids in March. CD 12/15.

▲ **O., Dayton**—OFFICES—Governors Hill Corp., 3300 S. Dixie, 14 offices, northbound US 25. $7,000,000.

▲ **Tex., Big Spring**—PLANT—Cosden Petroleum Corp., polybutene production plant. $1,750,000.

▲ **Va., Carbo**—POWER PLANT—Appalachian Electric Power Co., 40 Franklin Rd., Roanoke, third unit Clinch River Power Plant, incl. 225,000 kw. generator. $28,000,000.

▲ **Wyo., Cody**—REFINERY—Husky Oil Co., Cody, refinery addn. $8,000,000-$14,000,000. Universal Oil Products Co., 30 E. Algonquin Rd., Des Plaines, Ill., consult. engr. CD 10/28/58.

▲ **B. C., Trail**—PLANT—Consolidated Mining & Smelting Co. of Canada Ltd., Trail, alkali-chlorine plant, Warfield, near here. $2,600,000. CD 10/16/51, under B. C., Kimberly.

UNCLASSIFIED

▲ **Ill., Waukegan**—DOCK, etc.—Waukegan Port Dist., S. Genesee St., harbor work, incl. dock, terminal warehouse, concrete silo. $2,000,000. Bids in Spring.

▲ **Kan., Salina**—PARKING LOTS—City, City Hall, six parking lots. $1,430,000. Bucher & Willis, 629 E. Crawford St., consult. engrs.

▲ **N. J., Elizabeth**—VESSEL BERTHS, etc.—Port of New York Auth., 111 8th Ave., New York 11, N. Y., First stage of Elizabeth-Port Auth. Pier to incl.: 5 vessel berths, 2 transit sheds, 2,200,000 sq. ft. paved area and 8 cargo distribution bldgs., $20,000,000; other phases incl. 24 deep water berths, transit and open storage, transit sheds, cargo distribution bldgs. Total cost $100,000,000.

▲ **Tex., Houston**—WORLD TRADE CENTER—Port Comn., Navigation Dist., c/o Wharf No. 3 or 1519 Capitol Ave., plans by Wilson, Morris, Crain & Anderson, 3330 Graustark St., World Trade Center. $2,500,000. CD 8/28/58.

SOLVE YOUR GRATING PUZZLE



Every shipment of IRVICO grating is carefully checked and inspected to see that cutouts and sizes of panels are exactly in accordance with approved drawings.

When the job is delivered to you, the panels will fit into place easily and quickly, even where the application must be made like a jig-saw puzzle.

For more than half a century, the name Irving has meant grating fabrication under the rigid discipline of quality standards. Every job is treated individually, with considerable attention given to exact fit.

specify IRVICO

and you'll get

"A FITTING GRATING for EVERY PURPOSE!"

★

RIVETED
WELDED
PRESSURE-LOCKED

in steel, aluminum and other metals.

Catalog on request

IRVICO

IRVING SUBWAY GRATING CO., Inc.
Originators of The Grating Industry Est. 1902

Offices and Plants at:
5063 27th St., LONG ISLAND CITY 1, N.Y.
1863 10th St., OAKLAND 20, CALIFORNIA

Bids—Low Bids—Contracts—Second Section

NEW ENGLAND

BUILDINGS—LB & CA

▲ **Koch & Kehoe**, 7815 Old Georgetown Rd., Bethesda, Md., Separate Contracts, Approx. **$2,000,000**, 20 unit APARTMENTS, Gemmal Estate, Franklin St., BRAINTREE, MASS.

▲ **Abraham Bennett**, 115 French St., Bristol, Conn., Owner Builds, **$5,510,000**, 551 HOUSES, Witches Rock Rd., BRISTOL, CONN.

MIDDLE ATLANTIC

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

BRIDGES

January 15 Pennsylvania
January 28 New York
January 28 New York and Pennsylvania

STREETS AND ROADS

January 5 Pennsylvania
January 12 Maryland
January 13, 20 New Jersey
January 28 New York

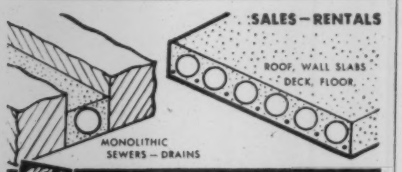

NEW! VOIDS IN CONCRETE with ELGOOD INFLATABLE VOID FORMS

REUSABLE RUBBER VOID FORMS FOR SEWERS, SLABS, DRAINS & DUCTS. SUPERSEDES ALL VOID FORMING TECHNIQUES.

- ALL DIAMETERS ¾" TO 120"
- GUARANTEE MINIMUM OF 100 USES Field experience, 250-3000 uses
- STAFF AVAILABLE FOR SPECIALIZED PROBLEMS

ELGOOD CONCRETE FORMS CORP.
378 TEN EYCK ST., BROOKLYN, N.Y. HY 7-5445

BUILDINGS—LB & CA

▲ **Henry A. Cohen**, dir. Bureau Contracts, State Office Bldg., Albany, N. Y., cancelled bids to have been opened Nov. 18, general contract, sanitary, electric, elevator, moving stairway and conveyor work for BUILDING No. 9, State Office Bldg., Campus site on behalf of New York State Employees' Retirement System, ALBANY, N. Y. CD 10/8.

▲ **Bergen Engineering Co.**, 131 Washington St., Lodi, N. J., CA **$1,750,000**, TERMINAL, Delancy St., NEWARK, N. J. Branch Motor Express Co., 455 W. 16 St., New York, N. Y. Frank S. Parker Asso., 625 8th Ave., New York, N. Y., engrs.-archts.

▲ **Arthur G. McKee & Co.**, 2300 Chester, Cleveland, O., CA, coal tar distillation equipment, Clairton PLANT, CLAIRTON, PA. U.S. Steel Corp., 325 W. William Penn Place, Pittsburgh, Pa.

▲ **E. Eyring & Sons**, 808 S. Conkling St., Baltimore 24, Md., CA **$2,164,875**, Holabird JUNIOR HIGH SCHOOL, Delvale Ave., TOWSON, MD. Baltimore Co. Bd. Educ., Aigburth Rd., Towson 4, Md. Bids Dec. 10. CD 12/15, under LB.

SOUTH

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

STREETS AND ROADS

January 27 Louisiana

HEAVY CONSTRUCTION—LB & CA

▲ **VIRGINIA**—State Dpt. Hys., 1221 E. Broad, Richmond,

Va.—**Sam Finlay, Inc.**, 1615 Cleveland Ave. S.W., Roanoke, Va., CA **$1,623,046**, 8.48 mi, two 24 ft. graded roadway on divided interstate highway from intersection U.S. 29-211 east of Gainsville to 0.39 mi. west of U.S. 29-211 Interstate Rte. 66 at Centerville Prince William and Fairfax Counties;

Va.—**Nello L. Teer Co., Inc.**, Trust Bldg., Durham, N. C., CA **$1,767,519**, paving two 24 ft. graded roadway, 4.6 mi. on divided Washington circumferential highway from Back Lick Rd. Rte. 617 to 0.85 mi. north of Rte. 236, Fairfax Co.;

Va.—**Lee Hy. Paving Corp.**, Roanoke, Va., CA **$975,802**, paving two 24 ft. graded roadways 3.28 mi. on divided interstate highway from 2.48 mi. west of Marshall to approx. 2½ mi. east of Markham, Fauquier Co. Bids Dec. 16, awarded Dec. 23. Grand total $5,989,413. CD 12/21, under LB.

▲† **Perini Corp.**, 73 Montwait Ave., Framingham, Mass., LB **$11,767,697**, est. $12,908,444 (9 bidders), lock on Georgia side Chattahoochee R., Walter F. George Lock and Dam, ALABAMA and GEORGIA. U. S. Eng., 2301 Grant St., Mobile, Ala. Bids Dec. 17. CD 11/11.

▲ **TENNESSEE**—State Rds. Dpt., Nashville,

Tenn.—**Anderson-Gregory Co.**, 407½ Union St., Nashville, Tenn., CA **$487,799**, grading, drainage entire project, 1 box type bridge and surf. 3.5 mi. with gravel or chert 9.246 mi. on section State Rte. No. 13 beginning at point approx. 9 mi. south of Linden near Flatwoods and extending to State Rte. No. 100 at Linden, Proj. No. F-013-1 (12), Perry Co.;

Tenn.—**Oman Constr. Co.**, Acklen Park, Nashville, Tenn., CA **$2,717,572**, grading, drainage and 5 concrete deck girder bridges, (3 sets of twin structures and 2 single structures) 6.959 mi. section Interstate Rte. No. 40, beginning at point just south of French Broad River in Jefferson Co. and extending to Carson Springs Rd. in Cocke Co., Proj. No. I-40-8 (9) 427, Jefferson and Cocke Counties.

BUILDINGS—LB & CA

▲ **A. C. Sanford, Inc.**, Box 1229, Albany, Ga., CA **$2,276,476**, single students men's dormitory RESIDENCE HALLS, University of Florida, GAINESVILLE, FLA. Florida State Bd. Control, Admin. Bldg., University of Florida, Gainesville, Fla. Bids Dec. 10, awarded Dec. 22. CD 12/18, under LB.

▲ **Bd. Comrs. Dade Co.**, 10 Floor, Courthouse, Miami, Fla., rejected bids Nov. 24, CRIMINAL COURTS BLDG., MIAMI, FLA. Will re-advertise. LB **$5,439,000**. CD 12/2, under LB.

▲ **Abraham Constr. Co.**, Box 2870, Baton Rouge, La., CA **$2,060,000**, steel frame, brick, concrete block McKinley HIGH SCHOOL (7 bldgs.), BATON ROUGE, LA. East Baton Rouge Parish School Bd., 805 St. Louis St., Baton Rouge, La. Bids Dec. 15, awarded Dec. 18. CD 12/18, under LB.

MIDDLE WEST

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

BRIDGES

January 12 Wisconsin

STREETS AND ROADS

January 12 Wisconsin

BUILDINGS—BA

▲† **Ill., Danville**—ADMISSION AND TREATMENT—BA 1/12—Veterans Admin., Munitions Bldg., Wash., D. C., Admission and Treatment Bldg. No. 98, at Veterans Administration Hospital. Extended date. CD 10/28.

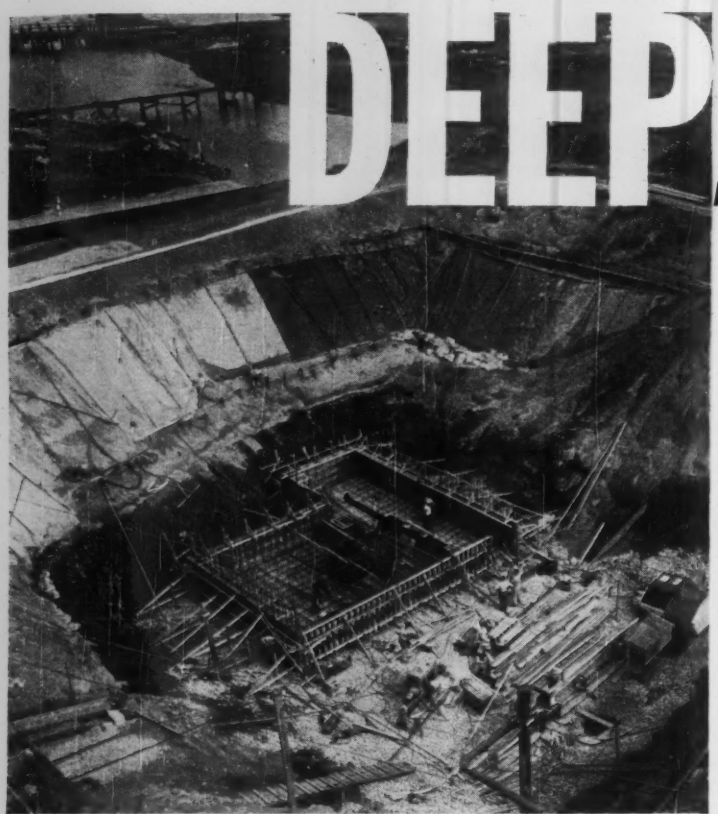

DEEP AND DRY

A Stang wellpoint system is predraining and stabilizing this pump station jobsite quickly, economically and efficiently. The site is clear, conditions are very workable. This is typical of Stang jobs.

JOHN W. STANG CORPORATION
Engineers and Manufacturers of Dewatering Equipment
8221 Atlantic Avenue, Bell, Calif.
Omaha • Tulsa • Minneapolis • St. Petersburg
Mobile • Tacoma



CATHODIC PROTECTION

Just Published. Here are the principles and practical methods of cathodic protection that enable the engineer to lessen metals corrosion economically and with a minimum of instruction and experience. This simply-written book gives you all the facts on protecting underground and submerged pipelines, tanks, and other structures from the costly ravages of corrosion. Covers the necessary instruments, field surveys and tests, interpretation of results, the design of adequate systems, and practical examples of typical installations from a wide range of localities. **By Lindsay M. Applegate, Lt. Col., U.S. Army, Retired. 221 pp., 6 x 9, 69 illus., $9.00**

FRAMES and ARCHES

Just Published. Shows how to save time in analyzing complex structures by using a new concept in solutions of frames and arches of constant or variable cross section. Gives over 400 condensed solutions for twenty principal types of statically indeterminate frames and arches—usable in steel, concrete, and wood design. Includes comprehensive charts and tables to facilitate analysis of haunched frames and arches. **By Valerian Leontovich, Civil Engineer. 494 pp., 523 illus., $20.00**

AERIAL PHOTOGRAPHIC INTERPRETATION

Just Published. This outstanding book blends the practical and theoretical aspects of aerial-photographic interpretation into a single, comprehensive reference. It explains and illustrates how practical information about the earth's surface and its physical phenomena can be rapidly, economically, and reliably obtained. A chapter is devoted to each of the major elements in the photographic pattern—landform, surface drainage, erosion, gray tones, etc., and detailed consideration is given to their importance and interpretation. **By D. R. Lueder, President, Geotechnics and Resources, Inc., 452 pages, illus. $17.50**

CIVIL ENGINEERING HANDBOOK

This updated fourth edition presents a wealth of essential theory and standards, practice and data, to meet the needs of civil engineers in solving specific problems. Experts give you hundreds of rules, principles, working methods, and other modern engineering pointers on: surveying—railway, highway, and airport engineering — mechanics of materials — hydraulics — stresses in framed structures—steel design—cement and concrete—foundations—sewage and sewage disposal—and water supply and purification. **Prepared by a Staff of Specialists, Edited by Leonard C. Urquhart, Consulting Engineer. 1174 pp., 814 illus., $17.50**

SEE THESE BOOKS 10 DAYS FREE

McGRAW-HILL BOOK CO., Inc. Dept. NR-1-7
327 W. 41st St., New York 36, N. Y.

Send me book(s) checked below for 10 days' examination on approval. In 10 days I will remit for book(s) I keep plus few cents for delivery costs, and return unwanted book(s) postpaid. (We pay delivery costs if you remit with this coupon—same return privilege.)

☐ Applegate—**Cathodic Protection**—$9.00
☐ Leontovich—**Frames and Arches**—$20.00
☐ Lueder—**Aerial Photog. Interp'n**—$17.50
☐ Urquhart—**Civil Eng. Handbook**—$17.50

(PRINT)

Name .....

Address .....

City ..... Zone.... State.....

Company .....

Position .....

For price and terms outside U. S. write McGraw-Hill Int'l., N.Y.C. NR-1-7

HEAVY CONSTRUCTION—LB & CA

▲ **OHIO**—State Hy. Dpt., State Dept. Bldg., Columbus, Zone 15, Bids opened 12/18,

O.—**The Horvitz Co.**, 4375 E. 146th St., Cleveland, O. LB **$3,869,883**, est. $4,432,500 (4 bidders) Type T-71 and structures 1.969 mi. SR 2-22.97, ACI 90-1 (18) 10 new, I-329 (12) old, City of Cleveland, Village of Bratenahl, Proj. 572, Cuyahoga Co.;

O.—**V. N. Holderman & Sons Co.**, 890 Oakland Park Ave., Columbus, O., LB **$2,116,856**, est. $2,283,900 (15 bidders), Type T-71 and structure 0.099 mi. SR 1-23.78 I-71-3 (21) 110, City of Columbus, Proj. 573, Franklin Co.;

O.—**A. J. Baltes, Inc.**, 11 Olive St., Norwalk, O., LB **$3,998,231**, est. $4,484,800 (12 bidders), Type T-71 structures 4.348 mi. USR 25-4.17, ACI 75.1 (33) 44 S-SG-308 (4) Village of West Carrollton, Proj. 574, Montgomery Co.

MISSISSIPPI TO ROCKIES

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

BRIDGES

January 12 Iowa
January 19, 22 Kansas
January 22 Oklahoma
January 26 Texas

STREETS AND ROADS

January 12 Iowa
January 19, 22 Kansas
January 22 Oklahoma
January 26 Texas

▲ **Okla., Tulsa**—AIRPORT TERMINAL—BA 2/2—City, City Hall, airport terminal, facilities, Tulsa Airport, $4,000,000. Plans deposit $100. Murray-Jones & Murray, 4238 S. Peoria St., archts. CD 6/2/58.

BUILDINGS—SLC

▲ **Tex., Houston** — OFFICE — Melvin A. Silverman & Assocs., 2923 Shenandoah St., soon lets contract 10 story, 212,000 sq. ft. tower office. $2,500,000-$5,000,000. Walter P. Moore, 2 Pinedale Pl. and T. A. Naman & Assocs., 2126 Welch St., engrs. CD 10/24/58.

FAR WEST

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

BRIDGES

January 20, 21 California

STREETS AND ROADS

January 15, 20 February 4, 11 California

▲† **Idaho, Mountain Home**—TECHNICAL FACILITIES—BA 2/24—U. S. Eng., City-County Airport, Walla Walla, Wash., technical facilities (Titan missile base) Mountain Home Air Force Base, WS107A-2, ENG-45-164-60-1, $30,000,000. Plans deposit $200. CD 12/23.

BUILDINGS—BA

▲ **Ariz., Phoenix**—HOTEL—BA 1/20—Arizona Opportunities, Inc., 1828 N. Central Ave., 8 story, Charterhouse Alez-Zon Hotel, SW corner of Central Ave. and Palm Lane, $3,500,000. Charles G. Polacek, 3424 N. Central archt. Hotel Corp. of America, lessee. CD 5/14.

HEAVY CONSTRUCTION—LB & CA

▲ **Williams & Burrows, Inc.**, 500 Harbor Blvd., Belmont, Calif., CA **$2,278,882**, reconstr. Central Reservoir near 23rd Ave. and MacArthur Blvd. involving 11,000 cu. yd. excav., 19,000 cu. yd. embankment, 2,200 cu. yd. concrete, etc. OAKLAND, CALIF. East Bay Municipal Utility Dist., 2130 Adeline St., Oakland, Calif. Bids Dec. 11. CD 12/18, under LB.

CANADA

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

STREETS AND ROADS

January 13 Ontario

▲ **Saskatchewan**—BA 1/26—Saskatchewan Power Corp., 1739 Cornwall St., Regina, 13,000 tons reinforcing steel and 47,000 tons portland cement, Hydro-Electric Project, Squaw Rapids. Crippen Wright Engineering Ltd., 207 W. Hastings St., Vancouver, B. C., engrs. CD 9/8.

BUILDINGS—LB & CA

▲ **J. L. Guay & Frere Ltd.**, 6900 Cote des Neiges Rd., Montreal, Que., CA Est. **$5,000,000**, 3 story WING, 5 story OUTPATIENTS DEPARTMENT, 331-bed HOSPITAL addn., HALIFAX, N. S. Sisters of Charity, Mount St. Stephen, Halifax, N. S. Bids Dec. 10. CD 11/24.

▲ **Perini Ltd.**, 49 Jackes Ave., Toronto, Ont., CA Est. **$2,500,000**, 12 story OFFICE, TORONTO, ONT. 48 Yonge St. Ltd., c/o Page & Steele, archts., 72 St. Clair Ave. W., Toronto, Ont.

LATIN AMERICA

BUILDINGS—BA

▲ **Argentina**—LUBRICATING PLANT, etc.—BA 3/31—Yacimientos Petroliferos Fiscales, Govt. Argentina, Av. R. S. Pena 777, Buenos Aires, lubricating and gasoline processing plant, Campo Duran, Salta. $15,000,000. CD 12/4.

HEAVY CONSTRUCTION—LB & CA

▲ **ARGENTINA**—Gobernacion, Resistencia, Chaco, **Gemarca S.A.**, Caracas, Venezuela, CA Est. **$11,000,000**, 260 mi. highway and country roads, Resistencia, Chaco.

Proved Cost Saver

CURE and SEAL CONCRETE WITH 1 PRODUCT

THOMPSON'S WATER SEAL

Eliminates wet sacks, papers, hosing and spraying

Spray deep penetrating, colorless Thompson's Water Seal on fresh concrete to cure and seal in one operation. Save time . . . save labor.

Effectively controls moisture loss for 28 days and beyond.

Assures uniform curing even in hot, dry weather.

Helps reduce checking, cracking, spalling.

Produces harder, dust-free surface.

Eliminates waterproofing concrete floors.

Permits adequate time for smooth troweling.

Send for technical bulletin and Contractors Case History file.

A proved bond breaker for pre-cast, tilt up and lift slab construction. Permits easy, clean separation of slabs, walls, pre-cast members.

Available in 5 and 55 gallon drums from building supply stores, paint and hardware dealers.

4932

Thompson's

MANUFACTURERS OF FINE PROTECTIVE CHEMICALS SINCE 1929

E. A. Thompson Co., Inc., Merchandise Mart, San Francisco 3, California

San Francisco • Los Angeles • San Diego • Portland • Chicago • Seattle • Denver • Dallas Houston • St. Louis • St. Paul • Detroit • Philadelphia • New York City • Memphis • Cleveland • Factory: King City, California

Construction Scoreboard

CONTRACTS ...

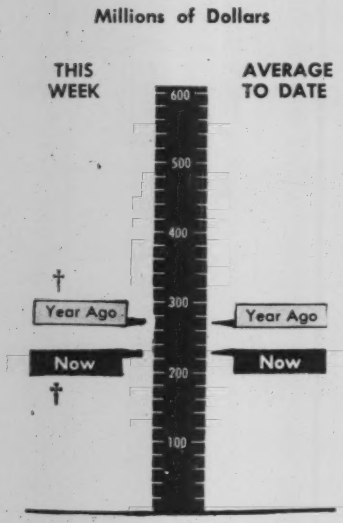

AMOUNT OF CONTRACTS LET

	†This Week	Cum. 1 wk # 1960	Chge '59-'60
	millions		%
All Heavy Constr....	$231.4	$231.4	−15
By Ownership			
PRIVATE	101.2	101.2	+62
PUBLIC	130.2	130.2	−38
State & Municipal..	88.9	88.9	−40
Federal	41.3	41.3	−36
By Type of Work			
PUBLIC			
Waterworks	7.5	7.5	+134
Sewerage	12.6	12.6	−49
Bridges*	8.4	8.4	−30
Highways	29.8	29.8	−47
Earthworks, Dams & Waterways	19.8	19.8	+19
Buildings:			
Excl. Housing	18.1	18.1	−60
Housing	9.0	9.0	+18
Unclassified	25.1	25.1	−46
PRIVATE			
Buildings:			
Mass Housing	34.7	34.7	+30
Commercial	15.2	15.2	−40
Industrial	46.4	46.4	+572
Unclassified	4.8	4.8	+37

* Includes private bridges
† 4 day week
# Revised to include Alaska and Hawaii, (For 1959, '58 totals for Continental U. S. see pp. 18, 64)
NOTE: Minimum size projects included are: Waterworks and waterways, $53,000; other public works, $88,000; industrial buildings, $110,000; other buildings, $400,000.

CAPITAL . . .

New Capital For Construction	Week of Dec. 31	Cum. 53 wks 1959	Chge '58-'59
	millions		%
Corporate Securities..	$0.8	$4,164.6	−17
State and Municipal:			
All Except Housing	9.9	5,882.1	− 6
Housing	....	119.7	+ 1
Federal Loans	....	140.2	−30
Federal Aid	....	3,343.4	+29
Total Nonfederal.....	$10.7	$13,650.3	− 4
Federal Appropriations:			
Projects in U. S....	....	$3,564.1	−16
Outside U. S.....	....	22.4	−50
Total New Capital...	$10.7	$17,236.8	− 7

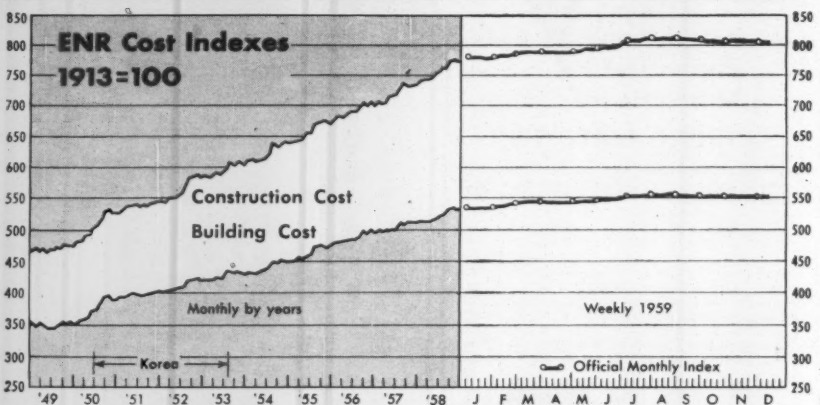

CURRENT COST INDEXES

ENR INDEXES (1913=100), 20-cities' average	Week of Dec. 31 1959	% Change from Dec. 3 1959	% Change from Jan. 1 1959
Construction Cost	811.98*	+0.4	+4.3
Building Cost	554.34*	+0.3	+3.4

* Official Monthly Index for January 1960

To convert above indexes to 1926 = 100: Divide Construction Cost by 2.080; Building Cost by 1.850.
1949 = 100: Divide Construction Cost by 4.770; Building Cost by 3.518.

WAGE RATES, 20-cities' average	Jan. 1960	% Change from Dec. 1959	% Change from Jan. 1959
Common	$2.638	+0.4	+5.4
Skilled (average 3 trades)	3.948	+0.2	+4.3
Bricklayers	4.175	+0.1	+3.7
Structural Ironworkers	3.979	+0.1	+4.6
Carpenters	3.69	+0.3	+5.0
Equipment operators (average three types)	3.563	+0.1	+4.3

MATERIAL PRICES, 20-cities' average			
Structural Steel (average 3 mills), per cwt	5.50	0	0
Lumber, 2x4 Fir, per M fbm	121.62	+0.9	+6.0
Lumber, 2x4 Pine, per M fbm	108.92	+0.8	+6.0
Cement, bulk, per bbl	3.982	+0.911	−0.02
Sand, per ton	2.472	0	−3.1
Ready-mixed concrete, per cu yd	14.147	+0.1	+1.2
Gypsum sheathing, ½"x2'x8', per Msf*	63.290	0	+0.7
Fiber board sheathing, ½" sq. ed., per Msf*	73.512	0	+2.7
Mineral wool insulation, 3' batts, per Msf*	68.38	0	−2.8
Crushed stone, 1½", per ton, CL	2.700	0	−2.1
Concrete blocks, sand/gravel, 8"x8"x16", each* ..	.2495	0	+11.4
	Jan. 1960	Dec. 1959	Jan. 1959
Brick, common per M	39.618	0	+5.6
Lime, hydrated finishing, per ton, CL	39.301	0	+4.0
Structural clay tile, 3x12x12", per M, 2,000 up*	185.95	0	+2.6
Vitrified clay sewer pipe, std 12", per ft	1.429	−3.7	+6.6
Concrete sewer pipe, 12", per ft	1.367	+1	+4.2

* Delivered, trucklots

ENR INDEX REVIEW

	Construction Cost 1913=100	Construction Cost 1949=100	Building Cost 1913=100	Building Cost 1949=100	Volume 1913=100	Volume 1949=100
1958 Average	**759.16**	**159.15**	**524.68**	**149.15**	**531**	**153**
1959						
Jan	778.28	163.15	536.23	152.43	460	133
Feb	778.75	163.25	537.25	152.72	472	136
Mar	781.35	163.80	540.32	153.59	586	169
Apr	784.41	164.44	542.93	154.33	532	154
May	790.37	165.69	544.44	154.76	700	202
Jun	795.16	166.69	548.35	155.87	650	188
July	806.69	169.11	551.74	156.84	671	194
Aug	811.15	170.04	554.31	157.60	509	147
Sept	812.56	170.33	555.88	158.01	545	158
Oct	811.40	170.09	555.40	157.88	415	120
Nov	809.78	169.75	554.19	157.53	509	147
Dec	808.63	169.52	552.80R	157.10	436	126
1959 Average	**797.39**	**167.17**	**547.82**	**155.72**	**540**	**156**
1960						
Jan	811.98	170.23	554.34	157.57	....	....

R: revised

What Price Steel Settlement?

- **A steady steel supply is assured by the agreement reached early this week, but prices will probably go up.**

- **How much is not yet known. Until the uncertainty is cleared up, estimating and bidding will continue difficult.**

Relief over an assured steel supply is tempered this week with uncertainty over what steel is going to cost.

Roger M. Blough, board chairman of U. S. Steel Corp. and spokesman for the steel industry, hinted broadly that the steel producers would not hold the cost line.

In a nationally televised speech, he described the steel settlement as "hardly non-inflationary," although conceding the increases won by the steelworkers are smaller this year than in any other postwar contract.

(The contract will cost steel companies about 40 cents an hour over 30 months for wages and benefits, with the first of two seven-cent hourly wage boosts payable on Dec. 1, 1960. The agreement, however, is dated back to last June 30. Work rules are to be worked out as questions arise.)

It seemed unlikely early this week that steel prices would rise as much as they did in '57, and it seemed probable that the steel producers would try to hold the line at least on some items.

Mr. Blough, in his statement, alluded the price competition from foreign producers. (Bars and nails are among the items that have become particularly competitive through the entry of foreign producers in the U. S. market.)

Because of the uncertainty over future steel prices, estimating and bidding for jobs is difficult, contractors and fabricators emphasize.

Many, if not all, would like to obtain escalator clauses in their contracts. But few can—the construction market is too competitive. Competition appears to be most marked in Boston, Seattle, Detroit, San Francisco, Denver, Dallas, Cleveland and New York City.

An industry source in Dallas says commercial contract volume there dropped 15% in the final quarter of last year. The decline is attributed to "uncertainty," and one of the big question marks has been price, he says.

Until agreement was announced, the outlook was rather grim. The steel industry's swift post-injunction return to weekly production levels of 90% to 96% has kept the construction industry rolling relatively smoothly. But that's all.

After 60 days or so of production, only enough steel has been provided to continue going jobs and restart projects halted just before the Taft-Hartley injunction on November 7.

There has been little, if any, building of inventories. Finished steel is being rushed immediately into production at construction sites, in fabricators' shops and in plants of construction equipment and materials manufacturers.

Despite the rapid recovery of production, shortages of key materials exist to some extent in all 12 cities checked by ENR.

The condition of steel stocks can be measured generally by a recent report of the Steel Service Center Institute (formerly American Steel Warehouse Association).

When the strike started last July warehouses held 3.7 million tons of steel. On December 25 they had 925,000 tons, or just 12.1% more than the warehouse low point of 825,000 tons, recorded shortly after the steel mills reopened. However, a large but unknown quantity of steel is "in transit," reports Robert Welch, executive secretary of the warehouse group.

The greatest shortage of construction steel appears to be in the Midwest. Coastal areas are generally better off, although there are spot shortages in some products.

Construction machinery manufactures say at least 90% of the steel now being delivered is going right to the production line.

Contractors in Houston and Dallas are still in pretty good condition. Full impact of the strike generally was not felt in those areas, according to a spokesman for the Dallas Chapter of Associated General Contractors.

In Houston foreign steel played a major part in easing the pinch. Imported steel reportedly accounts for half the Houston supply. The ratio is not as large in Dallas, where rail freight rates reduce the price advantage.

Supplies in Dallas were not depleted as much as expected because there were no contracts for large structures let during the final quarter of 1959, according to Julian Capers of the AGC in Dallas.

Fabricators in the area say they are quoting normal delivery time although they are now noticing some tightening of supplies in wide flange sections and some types of plate.

They also report fairly general use of imported steel.

Steel imports during the first nine months of 1959 totaled slightly more than 3 million tons, according to government figures. Of that amount, about 71%, or 2.1 million tons, was for construction.

Steel imports for all of 1959 are expected to be about 3.6 million tons, according to Robert M. Buddington, vice president of sales, Inland Steel Co. That would be equal to 5.4% of domestic steel shipments. In 1957, imports equaled only 1.5% of 1957 domestic shipments, he said.

Florida cities have barely felt the strike. Most construction in the state is reinforced concrete—and bars and mesh have been, and still are, in plentiful supply. Those steel materials were so heavily imported that Truscon Steel Division of Republic Steel Corp. no longer supplies rebars in the state. However, new purchases of foreign steel are declining because of climbing prices. To make foreign steel attractive, some jobbers say, there has to be a price advantage over the domestic product of $10 or more a ton.

In New York City, some fabricators are only now starting to feel the pinch. They have finished jobs for which they had steel, and are waiting to get their full orders, or at least 90% of them. One company could not maintain its shipments and has cut its work force to one-third normal size.

Albert Alpern of Grand Iron Works says mills are quoting four to five months delivery, compared to two or three in pre-strike days.

(Turn the page)

Another New York City fabricator, Jack Holland of Simon Holland & Son, Inc., is starting to receive all material ordered before the strike, plus 20% of orders since July.

In Chicago, supplies are spotty, with inventories of structural products out of balance. As in most cities, wide flange beams are tightest.

Improved inventories are not expected for about six months.

Chicago is the only city forecasting a price increase no matter what happens to the price of steel at the mills. The prediction of higher prices, however, applied only to warehouses.

Los Angeles contractors say that until now, the steel supply has not been too bad. But now some shortages are showing up. Steel now being produced is not filling the gap because mills are turning out only certain sizes, they report.

Standard structurals are booked through February and shortages in various sizes are expected to appear in the next 30 to 60 days.

The shortage of wide flange beams is particularly critical.

Halt to Bid Shopping Sought by School Board

Subcontractors in the Nashville area may get some help from the community in their attempts to eliminate bid shopping on local school construction.

Davidson County School Board is seeking greater control over the choice of subcontractors on school construction jobs. A report by the board's chairman accuses general contractors of forcing subs to pare their bids after the general contractor wins a school construction contract.

Manhattan Builders Keep Area's Boom Moving

The postwar office building boom in Manhattan Island continued to show zip last year.

Nineteen office buildings containing 6.4 million sq ft were completed last year, the Real Estate Board of New York reports. That brings the total of postwar structures completed to 116, containing 33.6 million sq ft.

An additional 16 buildings that will supply 11.1 million sq ft were under way when the year ended. And plans are on file with the city's Department of Buildings for 15 more structures to contain 6.6 million sq ft.

The three categories—completed, under way and on file—brings the city's postwar total to 147 buildings with 51.3 million sq ft.

Lumber Grade Pact Coming

Chances are good the Federal Housing Administration and Canadian lumber producers will reach some agreement this month on framing lumber grade marks. An accord would ease the threat of a lumber shortage and higher prices in this country for house-framing materials.

A storm broke in Canada soon after FHA ordered that grade-marked framing lumber be used in all houses built under FHA inspection after April 1. (ENR Nov. 19, 1959, p. 41). It meant that lumber shipments from British Columbia valued between $60 million and $80 million were threatened with cancellation.

Only 10 out of over 600 mills in the region could supply a recognized grade stamp, Canadian officials said. The nearest recognized grading agency, Pacific Coast Lumber Inspection Bureau, would need 50 more inspectors to cover all the mills. It would take at least one year to train that many men, the Inspection Bureau said.

The lumber market apparently sensed the possibilities inherent in the FHA order. Prices rose in four major cities two weeks ago and since then the market has been firm despite lower demand for lumber caused by the housing downturn. The situation was described by a major New York City dealer as "very bullish."

Meanwhile, the FHA action brought J. H. Jenkins to Washington from Ottawa. He is chief of the Forest Products Laboratories, Division of Northern Affairs and National Resources.

With approval of W. Beverley Mason, Jr., Assistant FHA Commissioner for Technical Standards, Mr. Jenkins took back a plan that will now have to be carried out by regional associations of Canadian lumber producers.

The associations must work up standards, grade markings and a seal that will meet with the approval of FHA and the American Lumber Standards Committee. The committee is a U.S. Commerce Department-lumber industry group appointed by the Secretary of Commerce.

Mr. Jenkins expects to be in Washington next week with the information. And he told ENR that he expects that most of British Columbia's lumber production capacity will be operating in three months with the approved grade markings.

Public Works 'Bank' Suggested

New York State's Gov. Nelson A. Rockefeller will push for a public works "bank" during the current state legislative session.

His plan would create a planned stockpile of public works to be used in times of recession (see editorial, p. 84). Governor Rockefeller compares the proposal to the federal Public Works Authority (PWA), a depression-born child of the late President Franklin D. Roosevelt.

Big difference, however, is that the PWA was a continuing "crash program" providing for public works construction to create work.

Mr. Rockefeller's plan would only be used in the future to provide employment when "pockets of recession" bring unemployment in the state.

To some extent, Governor Rockefeller's plan runs counter to recent thinking in Washington on the efficacy of using massive public works programs as a weapon against economic downturns. Top economists testifying before the Joint Economic Committee of Congress on national economic health and growth played this basic theme: The day of pump-priming is past. It is a crude and inevitably poorly timed device to use against recessions, and it should be removed from the nation's political arena (ENR Nov. 5, 1959, p. 21).

The governor's proposal, carrying no price tag, is linked to two other recommendations involving public works. The package is part of a major reorganization of state government recommended by Mr. Rockefeller.

The other proposals submitted last week in a memorandum to key legislators are:

- Centralize control and responsibility for public works in the office of the governor and provide the governor with information from state departments on the need for public works projects.
- Amend the State Constitution to allow the governor to ask voters for approval of a package of public works bond spending. Now, referendums must be on specific projects.

Centralization would eliminate responsibilities of the present Division of Public Works. Currently, the state is split up into reporting or administrative districts by the Departments of Public Works, Commerce and Labor.

(B&F continued p. 64)

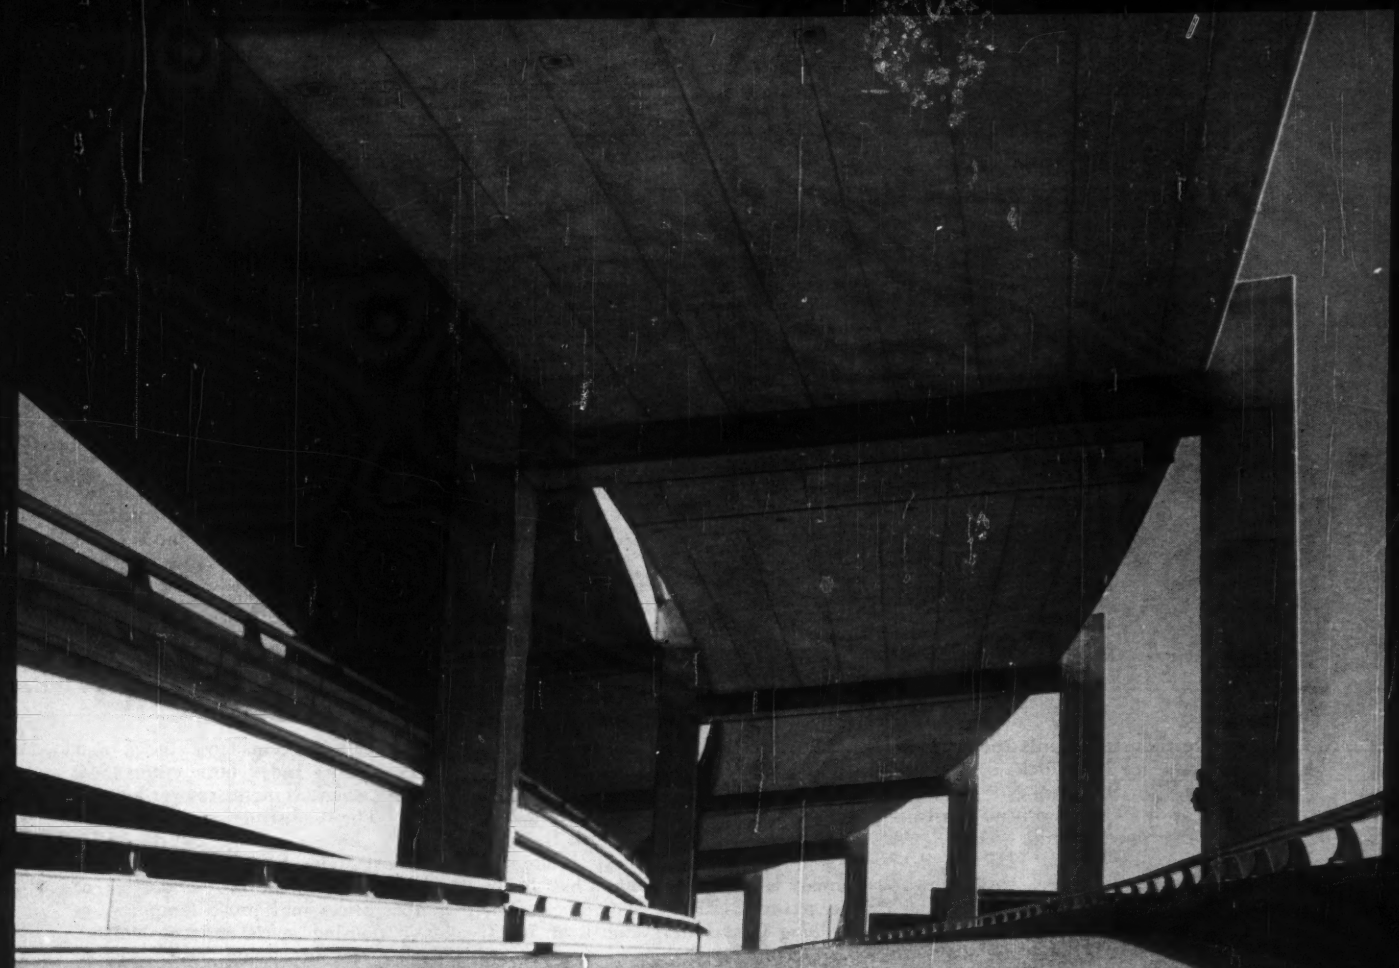

GPX® HIGH DENSITY

Overlaid plywood for smoother finish, faster stripping, longer life!

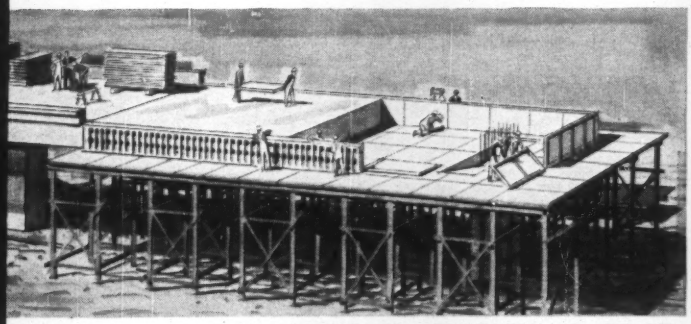

FOR A BETTER JOB, SPECIFY GPX HIGH DENSITY

Whether it's a skyway, or a skyscraper, this high density overlaid plywood is the ideal concrete form.

Smoother surface. You get a handsome concrete face, unmarred by grain, checks or patches. In buildings, ceiling slabs can be quickly prepared for painting.

Faster stripping. Smooth waterproof panels won't cling to concrete, are immediately available for re-use.

Longer form life. Form life is limited only by the number of cuts, and handling care. Available in all standard sizes and can be custom-sized. Write today for sample, specifications, and local source. Address Georgia-Pacific, Dept. ENR 160, Equitable Bldg., Portland, Oregon.

GP GEORGIA-PACIFIC

Plywood & Redwood • Lumber & Hardboard • Pulp & Paper

December Awards Put '59 Ahead of '58

Construction contractors signed up $1.6 billion worth of new business in the final month of 1959. That's 13% less than the weekly rate of November and 6% short of December 1958.

The year-end dip, however, did not prevent a gain for all of 1959, so it goes into ENR's books as the second biggest year on record with a contract award total of $20.3 billion (see p. 17). A 4% gain over 1958, according to ENR data.

Three large missile base installation awards, plus two major dam-site projects in Ohio-West Virginia and Oregon-Washington, pushed federal contracts in December 21% ahead of the weekly rate of both November 1959 and December 1958. But the federal total for the year still was 5% short of 1958.

Private industry awards topped public activity for the fifth consecutive month and for the year. Not since the boom year of 1956 has private construction outstripped public works. At $10.4 billion, 1959 was 32% ahead of 1958, despite the steel strike and a tight money market. That makes 1959 the third best year on record.

For the month, private contracts totaled $869 million, a 12% drop from November, but 24% ahead of one year ago.

Behind 1959's resurgence in private construction was the phenomenal recovery in industrial building. Close to $3 billion worth of new plants went to contractors last year, a 67% increase over 1958. December contracts dropped sharply, due in part to the uncertainties over the availability of steel. The setback, however, is temporary.

Private mass housing was also a star performer in 1959. It chalked up $4.7 billion in new contracts for a 23% gain over 1958—and that in the face of higher interest rates. Although December was 11% below the November pace, it was 8% ahead of December 1958.

Shopping centers and office buildings put commercial building at a new peak. For the full year, commercial contracts of $2.2 billion are 5% above the previous record, established in 1956. December contracts were 9% below November but 35% above December 1958. And, the commercial category is slated for further gains and a new record this year.

Considering the roadblocks confronting public works in 1959—particularly reduced federal aid for highways—the $9.9 billion of new projects awarded in 1959 was a respectable total. It was second to record 1958, and highway work was roaring.

Cost Indexes Renew Their Climb

Sudden firmness in the lumber market, higher prices for cement and a number of deferred wage boosts, combined to halt the three-month downtrend in ENR's 20-Cities Cost Indexes.

The Construction Cost Index for January is up to 812, only a hair below the record 812.6 in September. The Building Cost Index value is at 554.3. The record for that index was also recorded in September when the value was 555.9. Both indexes are based on 1913 = 100.

The Construction Cost Index and Building Cost Index both enter 1960 showing generous increases over January 1959. The Construction Cost Index is 4.4% above a year ago and the building Cost Index is up 3.4%.

The sudden halt in the decline of lumber prices may prove temporary as lower housing starts reduce demand. Also, threat of a shortage of lumber and higher prices stemming from an FHA lumber grading requirement has been eased (see p. 62).

Engineering Construction Contracts for December

Five Weeks—Thousands of Dollars (000 Omitted)

	December, 1959								Twelve Months Continental U. S. Cumulative			
	New England	Middle Atlantic	South	Mid-West	Mississippi to Rockies	Far West	Total Continental U. S.	% Change Dec. (Av wk)	1959 (53 wks)	1958 (52 wks)	% Change '58 to '59 (Av wk)	Canada Dec. 1959
Public Works, Total	21,628	143,114	129,077	79,780	174,044	173,189	720,832	−27	9,891,023†	11,434,452	−15	83,489
Waterworks	69	3,895	5,400	2,264	2,889	1,903	16,480	−40	373,241	306,256	+20	1,396
Sewerage	561	8,183	8,643	11,875	12,230	5,325	46,817	−32	653,219	617,830	+ 4	5,539
Bridges	400	2,170	12,914	4,310	10,224	8,059	38,077	−37	556,570†	702,737	−22	2,870
Earthwork, waterways	275	5,397	17,970	12,407	8,787	42,712	87,548	+19	910,830	1,044,648	−14	11,332
Streets and roads	3,889	45,130	38,050	26,375	47,530	25,914	186,888	−51	2,886,921	3,729,217	−24	10,906
Buildings: Residential	3,405	.....	4,894	1,507	3,588	1,301	14,695	−74	570,957	1,054,904	−47	6,384
Other	11,265	58,735	29,063	17,494	22,054	45,563	184,174	−13	2,575,296	2,609,571	− 3	19,138
Unclassified	1,764	19,604	12,083	3,548	66,742	42,412	146,153	+38	1,363,989	1,369,289	− 2	25,924
State and Municipal	17,904	131,096	93,092	63,070	99,926	85,243	490,331	−39	7,142,529	8,608,411	−19	49,152
Federal	3,724	12,018	35,985	16,710	74,118	87,946	230,501	+21	2,748,494	2,826,041	− 5	34,377
Private, Total	48,037	203,404	177,885	91,282	237,064	111,522	869,194	+24	10,387,952	7,730,182	+32	37,364
Bridges	.....	.....	480	.....	.....	700	1,180	+75	12,353	10,685	+14	.....
Buildings: Industrial	3,680	37,270	71,128	48,169	27,455	31,280	218,982	+39	2,980,585	1,755,973	+67	7,508
Mass housing	35,471	145,955	50,881	16,993	93,135	49,961	392,396	+ 8	4,693,833	3,739,213	+23	15,950
Commercial	8,786	17,579	47,910	22,530	44,575	25,461	166,841	+35	2,152,064	1,795,080	+18	7,481
Unclassified	100	2,600	7,486	3,590	71,899	4,120	89,795	+52	549,117	429,222	+22	6,425
Total Dec. 1959—5 weeks	69,665	346,518	306,962	171,062	411,108	284,711	1,590,026*	− 6	.....	.....	....	120,853
Total Nov. 1959—4 weeks	85,950	317,687	289,881	256,589	275,849	232,080	1,458,036*	....	.....	.....	....	95,205
Total Dec. 1958—4 weeks	91,206	337,730	244,179	239,123	280,355	159,244	1,351,840*	....	.....	.....	....	67,037
Twelve Months—1959	1,270,440	4,381,873	3,592,652†	3,506,548	4,244,807	3,282,655	.....	....	20,278,975*†	.....	+ 4	1,479,358
Twelve Months—1958	1,288,788	4,776,553	2,732,936	3,457,695	3,921,565	2,987,097	.....	....	.....	19,164,634*	....	1,557,191
% Ch'ge '58 to '59 (Av wk)	− 3	−10	+29	− 1	+ 6	+ 8	.....	....	.....	.....	....	− 7

* Not including Alaska & Hawaii:
Add: Alaska Dec. '59: 1,365 Nov. '59: 2,300 12 Mos. '59: 87,170 12 Mos. '58: 90,116
Hawaii Dec. '59: 9,201 Nov. '59: 1,897 12 Mos. '59: 56,363 12 Mos. '58: 99,896

† Does not include $126 million Chesapeake Bay Bridge-Tunnel contract which has been removed from these statistics until the bonds are sold.

ENGINEERING NEWS-RECORD *reports continental U. S. construction projects of the following minimum costs—Waterworks, excavation, drainage and irrigation,* $53,000; *other public works,* $88,000; *industrial buildings,* $110,000; *other buildings,* $400,000.

Special Introductory Offer

To new members of the CIVIL ENGINEER'S BOOK CLUB

ANY ONE FOR ONLY $1.00

YOURS WITH A CHARTER MEMBERSHIP AND SENT WITH YOUR FIRST SELECTION

VALUES FROM $6.50 TO $17.50



Publisher's Price, $11.50 Club Price, $9.80

Design and Construction of Asphalt Pavements by J. R. Martin and H. A. Wallace. Modern methods and technology.



Publisher's Price, $7.50 Club Price, $6.40

Composite Construction in Steel and Concrete by I. M. Viest, R. S. Fountain, and R. C. Singleton. Basic and practical.



Publisher's Price, $7.75 Club Price, $6.60

Soil Mechanics, Foundations, and Earth Structures by G. P. Tschebotarioff. Gives principles and practices.



Publisher's Price, $8.75 Club Price, $7.45

Surveying for Civil Engineers by Philip Kissam. Fundamentals, instruments, and methods for more accurate surveys.



Publisher's Price, $8.50 Club Price, $7.25

Design of Steel Structures by E. H. and C. N. Gaylord. Covers both steel and aluminum structural members.



Publisher's Price, $17.50 Club Price, $14.95

Handbook of Applied Hydraulics edited by C. V. Davis. A wealth of reference facts on all phases of hydraulics.

Publisher's Price, $8.75 Club Price, $7.45

Design of Concrete Structures, 6th Ed. by L. C. Urquhart, C. E. O'Rourke, and G. Winter. How to use new methods of design.



Publisher's Price, $10.75 Club Price, $9.15

Estimating Construction Costs, 2nd Ed. by R. L. Peurifoy. Techniques and data to help you make accurate forecasts.



Publisher's Price, $9.00 Club Price, $7.65

Construction Planning, Equipment, and Methods by R. L. Peurifoy. How to plan and carry out a project.



Publisher's Price, $6.50 Club Price, $5.50

Legal Guide for Contractors, Architects, and Engineers by I. Vernon Werbin. Legal points of 83 typical situations.

How many of the books shown here do you wish you had immediately at hand

Select one for JUST A DOLLAR! Choose from *Design and Construction of Asphalt Pavements, Surveying for Civil Engineers, Design of Steel Structures,* and seven other valuable books . . . your introduction to membership in *The Civil Engineers' Book Club.*

If you're missing out on important technical literature—if today's high cost of reading curbs the growth of your library—here's the solution to your problem. *The Civil Engineers' Book Club was organized for you,* to provide an economical technical reading program that cannot fail to be of value to you.

All books are chosen by qualified editors and consultants. Their thoroughgoing understanding of the standards and values of the literature in your field guarantees the authoritativeness of the selections.

How the Club operates. Every second month you receive free of charge *The Civil Engineers' Book Bulletin* (issued six times a year). This gives complete advance notice of the next main selection, as well as a number of alternate selections. If you want the main selection you do nothing; the book will be mailed to you. If you want an alternate selection . . . or if you want no book at all for that two-month period . . . notify the Club by returning the form and postage-paid envelope enclosed with your *Bulletin.*

We ask you to agree only to the purchase of three books in a year. Certainly out of the large number of books in your field offered in any twelve months there will be at least three you would buy anyway. By joining the Club you save yourself the bother of searching and shopping, and save in cost about 15 per cent from publishers' prices.

Send no money now. Just check any two books you want—one for only $1.00 and one as your first Club selection—in the coupon below. Take advantage of this offer *now,* and get two books for less than the regular price of one.

THIS COUPON IS WORTH UP TO $16.50

The CIVIL ENGINEERS' BOOK CLUB, Dept. ENR-1-7
330 West 42nd Street, New York 36, N. Y.

Please enroll me as a member of the Civil Engineers' Book Club. I am to receive the two books I have indicated at the right. You will bill me for my first selection at the special club price and $1 for my membership book, plus a few additional cents for delivery costs. (The Club assumes this charge on prepaid orders.) Forthcoming selections will be described to me in advance and I may decline any book. I need take only 3 selections or alternates in 12 months of membership. ***(This offer good in U.S. only.)***

PLEASE PRINT

Name .....

Address .....

City ..... Zone..... State.....

Company .....

NO RISK GUARANTEE If not completely satisfied, you may return your first shipment within 10 days and your membership will be canceled.

Check 2 Books: We will send the higher priced book for only $1.00, and the other as your Club Selection:

- ☐ **Design and Construction of Asphalt Pavements, $9.80**
- ☐ **Composite Construction in Steel and Concrete, $6.40**
- ☐ **Soil Mechanics, Foundations, and Earth Structures, $6.60**
- ☐ **Surveying for Civil Engineers, $7.45**
- ☐ **Design of Steel Structures, $7.25**
- ☐ **Handbook of Applied Hydraulics, $14.95**
- ☐ **Design of Concrete Structures, $7.45**
- ☐ **Estimating Construction Costs, $9.15**
- ☐ **Construction Planning, Equipment, and Methods, $7.65**
- ☐ **Legal Guide for Contractors, Architects, and Engineers, $5.50**

ENR-1-7

"Look...the Steering Levers are Gone!"

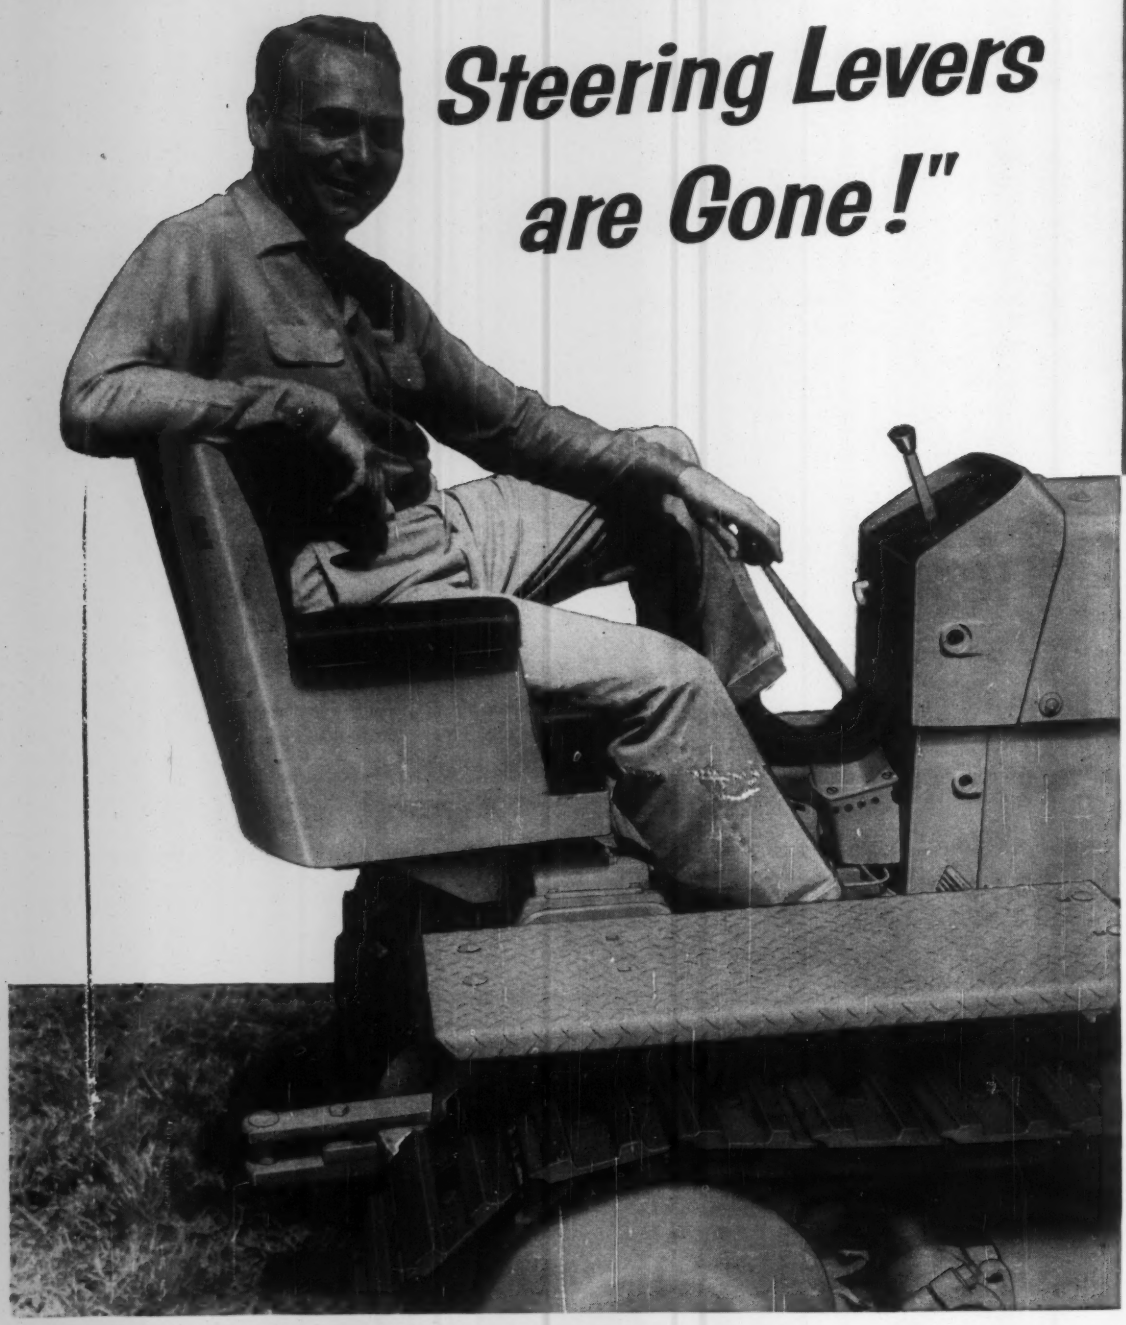

now you STEER, STOP, and REVERSE
with the NEW JOHN DEERE

PILOT *touch*

the only Single Stick crawler control

Ease the stick forward, back, left or right—the way you want to go—and the John Deere Crawler obeys! Clutching is automatic—braking, too—so no footwork is required.

One-hand driving with hydraulic-powered Pilot-Touch keeps the operator fresh and alert—frees a hand for full-time control of loader, dozer, or other equipment. Payoff—a better job, and higher daily work production.

Pilot-Touch is an exclusive John Deere development, yours optionally on both Diesel and gasoline "440" crawlers. Your nearby John Deere Industrial Dealer soon will be demonstrating crawlers with this new hydraulic-powered control. See him or write us for complete details.

John Deere Industrial Division, Dept. 2045, Moline, Ill.

JOHN DEERE *"Specialists in Low-Cost Power with a Heavyweight Punch"*

JOHN DEERE

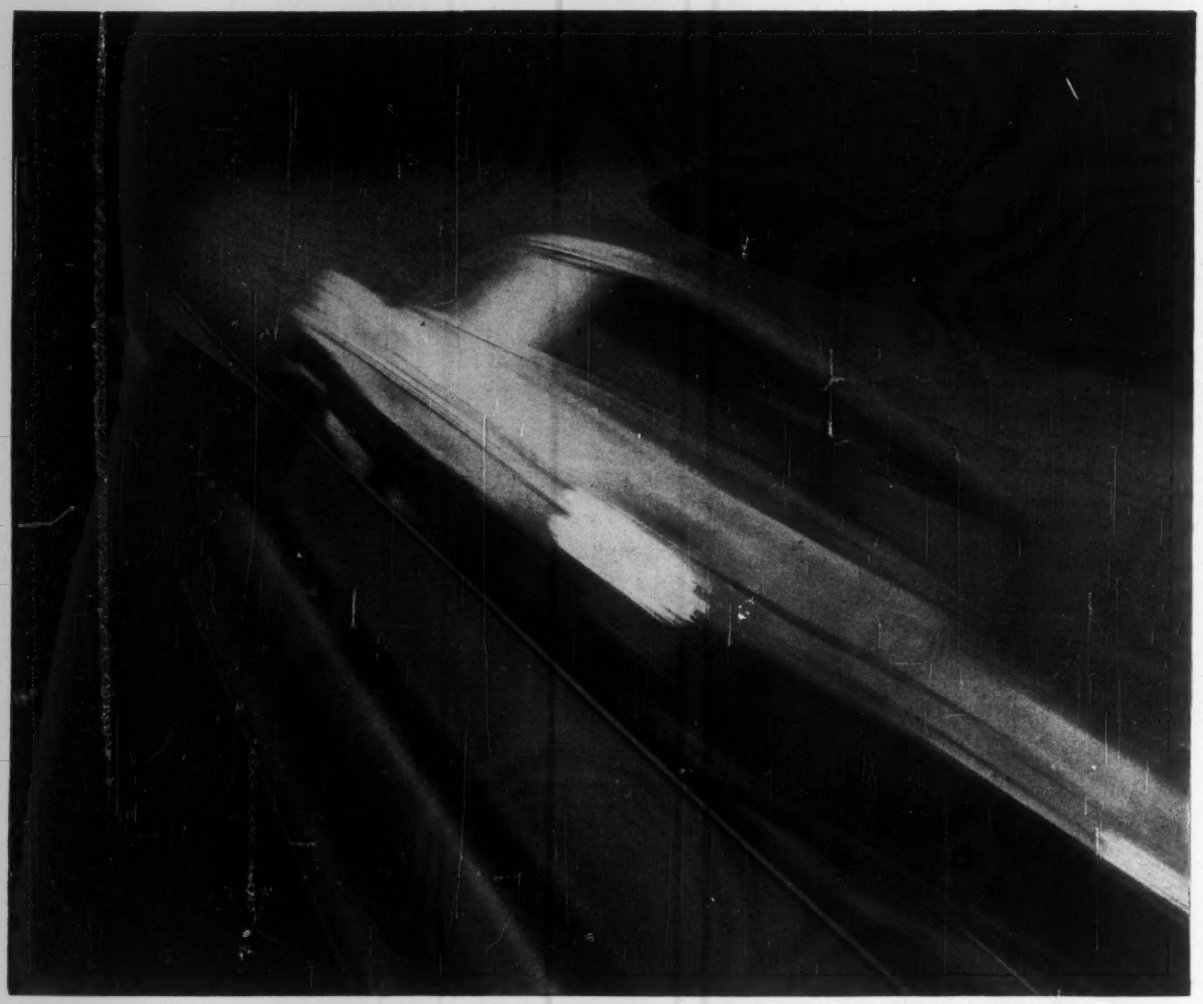

Bethlehem Beam Guard Rails-
Strong Steel Barriers off the Highway

Builders of off-highway automotive installations, like this new car test track at Chrysler Engineering Proving Grounds, are finding Bethlehem steel guard rails ideal as protective barriers.

Other non-highway applications include parking lots, parking garages, driveways and other traffic control areas, and pedestrian walk-ways.

The same advantages of steel beam guard rail that make it so vital a part of modern highway construction apply to uses off the highway: strength, pleasing appearance, low maintenance, good visibility, and safety.

New Bethlehem Booklet Available

Just off the press is a new Bethlehem booklet describing the uses of both Bethlehem Safety-Beam and Bethlehem Beam Guard Rail off the highway. Test and assembly data and specifications are included.

A free copy of this informative booklet is yours for the asking. Just address your card or letter to the nearest Bethlehem Sales office, or direct to Publications Department, Bethlehem, Pa.

BETHLEHEM STEEL COMPANY, BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by
Bethlehem Pacific Coast Steel Corporation
Export Distributor: Bethlehem Steel Export Corporation

BETHLEHEM STEEL

BETHLEHEM STEEL

Wage Increases Are Tapering Off

- **Average increase in hourly wage scales dropped to 13.8 cents last year. Long-term pacts will tend to perpetuate the downward trend.**

- **Fringe benefits appear to be taking up the slack. Some segments of the industry experiment with improvements in bargaining.**

With comparatively little fanfare, the construction industry has slowed down the rapid climb of its hourly wage scales. It has set a more moderate pace for the years immediately ahead and has taken positive steps in several instances to reaffirm the proposition that collective bargaining will work if management and labor give that proposition half a chance.

In its 1959 collective bargaining sessions, the industry negotiated increases ranging from two to 40 cents an hour, but it kept the average of its current wage increases for union workers down to 13.8 cents an hour. That is the lowest in several years. And, through use of long-term contracts, it set its sights on a further drop in 1960 negotiations.

While the resulting outlook is for 1960 wage increases averaging in the vicinity of 13.4 cents an hour, this does not mean that total labor costs are finally moving toward a plateau. The reasons, according to settlement reports received by ENR throughout the year, are twofold:

• **Elimination of wasteful work practices has not become a bargaining factor of any significance.** Efforts in that direction during 1959 were spotty—with results such as these: A flexible lunch hour for Essex County, N. J., cement masons; docking of Chicago sheet metal workers for late arrivals and early quittings; lifting of restrictions on use of power tools and equipment by Chicago plumbers, and of rollers by Pittsburgh painters, and more flexible, less expensive overtime pay provisions for Sacramento glaziers.

• **Fringe benefit activity, relatively brisk in 1959, promises to remain an increasingly costly factor** as building tradesmen seek to catch up with workers in other industries. The continuing trend toward new or improved pension, vacation, holiday, health and welfare benefits is apt to more than offset any apparent savings in basic rate increases. Last year's low wage increase average of 13.8 cents an hour was accounted for, at least in part, by substituting fringe benefits for pay increases, with or without a wage freeze.

This over-all picture, however, is not as gloomy as it may sound to those made pessimistic by a year of general labor strife.

Despite the fanfare of the big industrial strikes and the long construction disputes in Alaska and Glen Canyon, 1959 construction settlements were reached with proportionately fewer strikes than the year before. Strikes occurred in only 17% of last year's bargaining situations reported to ENR, compared to 28% in 1958. Most frequent of the non-wage stumbling blocks were hiring clauses and travel pay provisions.

Two collateral developments of greater significance were these:

• Running counter to the steel-inspired tenets of the National Association of Manufacturers, there was a good deal of uncoordinated groping by contractors and unions alike for realignment of collective bargaining situations on a larger scale, including consolidation of small, and administratively costly fringe benefit funds.

The '58 Wage Picture

1. Basic wage hikes were smaller

Type of contract	Average increase in 1959	1958
One-year contract	13.7¢	15.5¢
Long-term contract		
First year	13.8¢	14.5¢
Second year	13.4¢	13.7¢
Third year	13.4¢	12.6¢

2. The slowdown is built in because of long-term contracts

In 1958, 54% of contracts were long term.
In 1959, 65% of contracts were long term.

3. 15¢ hike was most popular

Amount of increase	% of contracts
15¢	27%
10¢	25%
12½¢	8%
20¢	8%
25¢	5%
All other (2¢ to 40¢)	27%

• Along with this interest in more order was a notable desire to settle disputes and to find solutions to mutual problems voluntarily and within the family—a principle reflected in such 1959 developments as the Kaiser Steel settlement, formation of the Construction Industry Joint Conference and George Meany's proposal for a labor-management-White House conference on labor problems.

Biggest indication of the industry's drive for stability in both labor costs and labor relations, however, continued to appear in the increasing prevalence of long-term contracts.

Nearly two-thirds of the 1959 agreements were negotiated for terms longer than one-year (see table), with a two-year term the favorite. Number of contracts with longer than three-year duration was negligible. One year contracts were particularly popular with roofers, boilermakers and iron workers.

In contrast to the 1958 situation, long-term contracts no longer proved cheaper for the first year, and the size of deferred wage increases no longer showed an appreciable decline over the contract term.

Average of the deferred wage increases due this year under the 1959 long-term contract is 13.4 cents, which sets a floor of sorts for this year's settlements. It has proved a reliable indicator in the past. Average 1959 deferred increase under 1958 contracts, for example, was 13.7 cents. In last year's negotiations, 13.7 cents was the ENR average settlement figure in one-year contracts, while 13.8 cents was the average 1959 increase in long-term contracts.

As expected in a heterogeneous industry embracing many hundreds of bargaining situations, wage increases for 1959 ran everywhere from two to 40 cents an hour, pushing the average union construction wage scale up to $3.50 an hour. This compares to a U. S. Labor Department figure of $3.52, which is based on seven trades only.

Highest average 1959 increases were won by the boilermakers, lathers and

AURORA® Split Case

CENTRIFUGAL PUMPS

with

• SMOOTH PERFORMANCE
• EASY MAINTENANCE
• HIGH CAPACITIES

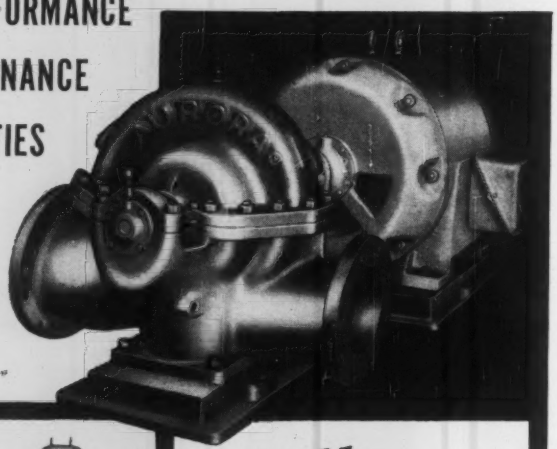

Type OJ Horizontally Split Single Stage Double Suction. Bulletin 105-B.



Type AJ Horizontally Split Two Stage Opposed Suction. Bulletin 106-B.



Type AJ Diagonally Split Two Stage

Bulletin 106-DS

• Capacities to 6000 GPM—heads to 600 feet—continuous operation.

• Both suction and discharge on bottom half of case . . . piping or motor-pump alignment never disturbed . . . lugs on top half of case for easy removal . . . by-pass in lantern ring exposed in lower half of case . . . fast, easy to inspect, clean and maintain . . . lines are back in operation fast!

• Streamlined liquid flow . . . hydraulically and dynamically balanced impellers . . . perfect alignment with in-line boring with top half of case in position . . . large standardized shaft sizes for maximum strength . . . short bearing centers for maximum rigidity and balance . . . low NPSH . . . smooth, long-term top performance . . . long life!

IDEAL FOR: Water Service • Boiler Feed • Circulating • Cooling Tower • Pressure Build-Up • Fuel Transfer • Boosting to Pressure or Elevated Tanks • Many General Applications.

FOR COMPLETE INFORMATION WRITE—OR CALL

AURORA Always PUMPS

AURORA PUMP DIVISION
THE NEW YORK AIR BRAKE COMPANY
680 LOUCKS • AURORA, ILLINOIS

LOCAL DISTRIBUTOR IS LISTED IN THE YELLOW PAGES OF YOUR PHONE BOOK

operating engineers. These trades, incidentally, were the only ones that hit an average above 15 cents. The rest, ranged from 12 to 14.9 cents an hour.

Hourly wage increases expressed in flat sums (such as 12½ cents) instead of in a percentage of the existing rate (6%, for example) were the general rule, although the more costly percentage system continued to be used in some cases for fringe benefits. Cost-of-living escalator clauses, however, all but disappeared.

Payment of annual increases in two or more installments continued to be a popular trend, but the arrangement of installments showed no discernible pattern.

Wage freezes did not occur in any significant quantity. Except in the case of Nashville bricklayers, who accepted a wage freeze for two years, most moratoriums were scheduled for the tag end of long-term contracts.

Negotiation of a wage increase or a fringe benefit, but not both, was prevalent in 1959 bargaining, and diversion of present or prospective wage increases to fringe benefits was fairly common.

Construction workers continued to seek longer vacations and more paid holidays instead of a shorter workweek, and accelerated their drive for pension coverage. Apprentice training (perhaps spurred by the Landrum-Griffin change in the law), health and welfare and severance pay received considerable attention.

Interest in travel and subsistence pay was high, but mixed, with some unions accepting less, others getting more. This was the stumbling block in the Glen Canyon Dam dispute, which was settled late last month when the unions dropped a demand for $6 a day subsistence and accepted premium pay of 50 cents an hour (see p. 19).

One of the upshots of this 1959 squeeze on wages, with its resulting bulge in fringe benefits, is apt to be increasing legislative interest during 1960 in prevailing wages. As Washington, D. C., union contractors have already noted, higher fringe costs add to the competitive advantage of non-union contractors bidding on public works projects covered by the present Davis-Bacon formula.

In retrospect, 1959 collective bargaining in the construction industry has some of the aspects of a shake-down cruise. Wage settlements were tempered and efforts were made to obtain greater uniformity in wages and working conditions.

But perhaps more importantly, bargaining structures and practices were re-examined and, in some cases, improved, to meet the mounting and com-

plex demands of contract negotiation and administration. This, incidentally, is a trend that may be accelerated in 1960 by efforts to ease the reporting and bonding burdens imposed by the Landrum-Griffin law.

Here's a glimpse at some of the groping that occurred in 1959:

Five West Coast builders' associations established a new multi-employer group for joint bargaining purposes. Later, a California chapter of the Associated General Contractors proposed formation of a joint labor committee, with the new group to negotiate and administer labor contracts.

The Wisconsin Road Builders' Association laid the groundwork for statewide negotiations with four basic trades; the Western Conference of Teamsters began to explore area-wide construction contracts for its 262 locals in 13 states; some progress was made in New Jersey toward a state-wide pension fund for carpenters; area wage equalization received attention, and some success, in a few bargaining situations.

Coupled with this type of exploration were some notable efforts to preserve and promote free collective bargaining by giving it a chance to work. They contrast sharply with the bargaining atmosphere created by the steel companies that refused to go along with the Kaiser formula.

In several construction bargaining situations, for example, striking unions went back to work under skeleton contracts while negotiations continued on the knottier problems. Pittsburgh boilermakers subscribed to a back-to-work, voluntary, 90-day cooling off period; Alaska carpenters agreed to arbitrate their travel pay dispute with the AGC; New England iron workers and their employers submitted a show-up time dispute to a joint study committee; Detroit painters and contractors set up a joint committee to study industry problems; industry promotion funds were agreed to by Indianapolis bricklayers and Philadelphia carpenters, who, incidentally, experimented successfully with bargaining months in advance of their contract expiration date.

And out of Pennsylvania came some indication that construction labor and management can agree on a formula to simplify bargaining. There, the Keystone Building Contractors Association (AGC) and millwrights in a 17-county area applied for the first time last year an automatic wage formula that uses millwright rates in 12 jointly selected cities. The rest of the contract, unless reopened for negotiation on proper notice, automatically continues from year to year. The device is described as "simple, sensible and workable" and enables contractors to know what the future rate will be months ahead of its effectiveness.

Whether the '59 bargaining sessions raised more problems than they solved remains to be seen. But at least they demonstrated again to the industry that bargaining is not a casual affair and that the complex economic and legislative aspects of the industry's labor problems are closely related.

How to Use U. S. Training Funds

National defense education funds should not be used exclusively for training technicians, who compete for jobs that construction workers could do. But its up to construction industry members at the local level to make sure at least some of those funds are used for their own training, says Peter T. Schoemann, president of the plumbers union.

Mr. Schoemann said industry members at the national level have "opened the door" for use of the funds to help supplement and improve construction industry apprentice and journeymen training programs. It is now up to those at the local level, he warned, to turn this to their "own advantage."

Ever since the passage of the National Defense Education Act last year, the problem has plagued the construction industry.

The law, which amended the George-Barden Act, is designed to promote development of area vocational education programs to train "highly skilled technicians in recognized occupations requiring scientific knowledge in fields necessary for the national defense."

The U. S. Office of Education took the position that such workers as "electrical technicians" and "refrigeration technicians" could be trained under programs partly financed by the funds the law made available to states, but its initial approach excluded the construction industry and its workers as neither essential to national defense nor highly skilled.

Several large national union and contractor groups interceded and persuaded federal officials to take a broader and more realistic view. The revised regulations that resulted no longer limit use of the funds to technicians to the exclusion of apprentices and journeymen and recognize the existence of construction skills and projects essential to national defense.

OFFICIAL PROPOSALS

Bids: February 16, 1960

Northwest Interceptor
River Rouge Section

ADVERTISEMENT
DEPARTMENT OF PUBLIC WORKS
CITY OF DETROIT, MICHIGAN
CONTRACT PW-3023R

Sealed proposals for the construction of a sewer and alterations to an existing pumping station will be received at the Office of the City Engineer, 528 City-County Building, Detroit 26, Michigan, until 2:00 P.M., Detroit time, Feb. 16, 1960, and then at such place and time publicly opened and read aloud.

The work included in this Contract consists of 1.29 miles of 6'-3" diameter sanitary sewer, to be constructed in tunnel, with the use of compressed air, in Evergreen Road and Warren Avenue, from Ford Road to Pierson; and of alterations to a small existing sanitary pumping station at Pierson and Warren Avenue, converting the structure from a pumping station to an automatically controlled regulating structure.

The Bidding Documents may be examined at the Office of the City Engineer during business hours, and copies may be obtained upon deposit of $25.00 per set which deposit will be refunded upon the return of the Bidding Documents in good condition within 10 days after the date for opening of bids.

Each proposal must be accompanied by a certified check, bank draft, or a satisfactory surety bid bond in an amount not less than 5 percent of the total bid price as guarantee and security for the acceptance of the Contract.

Checks shall be made payable to the Treasurer, City of Detroit.

No proposal once submitted may be withdrawn for at least 45 days after the actual opening of the bids. The City of Detroit reserves the right to waive any irregularity in any bid, or to reject any or all bids should it be deemed for its best interest.

CITY OF DETROIT
GLENN C. RICHARDS
Commissioner of Public Works

M. F. WAGNITZ
City Engineer

Sealed bids for the air conditioning of four buildings in the Panama Canal Zone will be received until January 15, 1960, in the office of the Engineering and Construction Director, Panama Canal Company, Balboa Heights, Canal Zone, and will be publicly opened at that time. The work consists of architectural remodeling, electrical work, and air conditioning the first, second, and third floors of Building 28 in Balboa; first floor and mezzanine of Building 365 in Ancon; first floor of Building 100 in Coco Solo; first, second, and third floors of Building 1010, Cristobal, and performing other appurtenant work. Drawings and specifications are available for examination in Procurement Office, Panama Canal Company, 21 West Street, New York 6, N. Y., and may be obtained free of charge by any interested party from this office. For further information call BOwling Green 9-5380, extension 73.

Sealed bids will be received in the office of Engineering and Construction Director, Balboa Heights, Canal Zone, until February 29, 1960, and will at that time be publicly opened, for dry excavation and drilling and blasting work at Empire Reach, Canal Zone. The work consists of excavation in the dry of 7,000,000 cubic yards of material, drilling 1,000,000 linear feet of blast holes, and the use of 2,000,000 pounds of explosives to break up material which will be excavated and disposed of by Panama Canal Company. Plans and specifications are available for examination and may be obtained from Procurement Office, Panama Canal Company, 21 West Street, New York 6, N. Y. Deposit of $50.00 is required for each set. For further information contact this office or call BOwling Green 9-5380, extension 73. Reference PC 60-41.

OFFICIAL PROPOSALS

Bids: January 28, 1960.

New York State Road Work

NOTICE TO CONTRACTORS: STATE DEPARTMENT OF PUBLIC WORKS, ALBANY, N. Y.—Pursuant to the provisions of the Highway Law, Public Buildings Law, and Article 2, Title 9 of the Public Authorities Law, and special provisions for projects financed with Federal Aid Funds, sealed proposals will be received until ten-thirty o'clock A. M., eastern standard time on the 28th day of January 1960, by Henry A. Cohen, Director, Bureau of Contracts, 12th Floor, The Governor Alfred E. Smith State Office Building, Albany, N. Y., for the following projects:

County	Contract No.	Name	Miles	Type	Deposit	Estimated Cost of Work
DISTRICT No. 1, G. L. NICKERSON, District Engineer, 353 Broadway, Albany 1, New York						
Rensselaer (Rte. 40)	FARC 60-4	Schaghticoke-Schaghticoke Hill, S.H. 477 Melrose-Schaghticoke Hill, S.H. 1425A Project F-504(10)	0.52	8" Cem. Conc. Pavt. 24' Wide = 0.49 Mi. Misc. Work = 0.03 Mi. Prestressed Conc. Beam Br. 125'	$21,000 Plans $5	$376,000
Schenectady (Rte. 159)	FARC 60-6	Mariaville-Montgomery Co. Line, S.H. 789 Project F-1024(2)	0.03	Asph. Conc. Pavt. = 0.02 Mi.; Misc. Work = 0.01 Mi. Corr. Multiplate Arch Br. 20.8' Span	$4,800 Plans $5	87,000
Warren	M60-1	Brayton Ave: Canal Bridge over Glens Falls Feeder	....	Strengthening Exist. I-Beam Bridge	$500 Plans $10	8,700
DISTRICT No. 2, L. KETCHUM, District Engineer, 109 No. Genesee Street, Utica 1, New York						
Oneida	M60-2	Roberts Bridge over Erie Canal Br. E-61, Verona, New York	...	Clean. & Paint. 1 Bridge	$200 Plans $10	3,400
DISTRICT No. 3, EARLE E. TOWLSON, Acting District Engineer, 333 E. Washington Street, Syracuse, New York						
Oswego	U. S. 104	Lock 0-7, Oswego Canal City of Oswego	....	New Gates, Lowering Upper Sills and Misc. Work	5% of Bid Plans $10	(Confidential
Oswego	U. S. 103	Lock 0-6, Oswego Canal City of Oswego	....	New Gates, Lowering Lower Sills and Misc. Work	5% of Bid Plans $10	(Confidential
DISTRICT No. 4, B. F. PERRY, District Engineer, Barge Canal Terminal, Rochester 1, New York						
Monroe (Rte. 104)	FAC 60-1	Rochester City-Ridge Road West (Kodak Bridge and Approaches) Project UG-402(9)	0.10	Asph. Conc. Type 2A Pavt. = 0.09 Mi. Misc. Work = 0.01 Mi. R.R.G.S., Comp. I-Beam 60.74'	$10,000 Plans $5	188,000
DISTRICT No. 5, E. G. H. YOUNGMANN, District Engineer, State Office Bldg., 65 Court Street, Buffalo 2, New York						
Cattaraugus (Rte. 18)	FARC 60-25	Bradford-Carrollton, Pt. 1, S.H. 8007 Bradford-Carrollton, Pt. 2, S.H. 8018 & 8018A Bradford-Carrollton, Pt. 3, S.H. 8144 Project F-30(5)	6.78 (2.75 Acc.)	9" Cem. Conc. Pavt. 24' Wide = 6.04 Mi. Asph. Conc. Pavt. = 0.74 Mi. (Access Rds. = 2.75 Mi. Asph. Conc. Pavt.)	$145,000 Plans $5	2,653,000
Cattaraugus (Rte. 242)	FARC 60-9	Little Valley-Randolph, Pts. 1 & 2, S.H. 8149 Little Valley-Randolph, Pt. 3, S.H. 5258A Project F-603(9)	4.67	Asph. Conc. Pavt. = 4.65 Mi. Misc. Work = 0.02 Mi. Corrug. Plate Twin Arch Bridge 36'	$47,000 Plans $5	851,000
Niagara	FAC 60-14	City of Niagara Falls: Hyde Park Boulevard (B Street to Jerauld Avenue) Project U-1128(2)	1.95	Asph. Conc. Pavt. = 1.88 Mi. Misc. Work = 0.07 Mi. Extension of R. C. Twin Box Br. 24'	$100,000 Plans $5	1,837,000
Niagara	FASS 60-1	Lockport Road (County Road No. 132) Project S-528(2)	3.05	9" Unreinf. Cem. Conc. Pave. 24' Wide = 2.96 Mi. Misc. Work = 0.09 Mi.	$35,600 Plans $5	629,000
DISTRICT No. 6, J. H. THOMAS, District Engineer, State Office Bldg., 30 West Main Street, Hornell, New York						
Steuben (Rte. 17)	FARC 60-7	Painted Post-Addison, Pt. 2, S.H. 5094 Painted Post-Addison, Pt. 3, S.H. 5349 Project F-593(11)	3.97	Asphalt Concrete Pavement	$28,000 Plans $5	509,000
DISTRICT No. 7, R. W. SWEET, District Engineer, 444 Van Duzee Street, Watertown, New York						
Jefferson & Lewis (Rte. 12)	FARC 60-3	Burrs Mills-South Champion, S.H. 626 Lewis Co. Line-South Champion, S.H. 1129 Copenhagen, S.H. 937 Project F-1043(4)	1.50	Asph. Conc. Type 1A Pavt. = 1.38 Mi. Misc. Work = 0.12 Mi.	$20,000 Plans $5	397,000
St. Lawrence (Rte. 345)	FARC 60-5	Madrid-Waddington, Pt. 1, S.H. 1262 Madrid-Waddington, Pt. 2, S.H. 966 Waddington Village, S.H. 1125 Project S-110(2)	8.30	Asph. Conc. Type 1A Pavt. = 8.26 Mi. Misc. Work = 0.04 Mi.	$75,000 Plans $5	1,364,000
DISTRICT No. 8, K. G. RAUER, District Engineer, Pleasant Valley Road, Poughkeepsie, New York						
ORANGE (Rte. 17K)	RC 60-8	Bloomingburg-Bullville, S. H. 8166	0.35	Asph. Conc. Pavt.	$3,600 Plans $5	65,000
DISTRICT No. 9, J. C. FREDERICK, District Engineer, 71 Frederick Street, Binghamton, New York						
Broome (Rte. 369)	FARC 60-10	Chenango Towpath, S.H. 175 Port Crane-North Fenton, S.H. 963 Project S-815(2)	6.48 (0.21 Acc.)	Asph. Conc. Pavt. Repair Exist. Br. No. 1 Corrug. Plate Twin Arch Br. 25' Comp. W.F. Beam Br. 104.5'	$85,000 Plans $5	1,497,000
Delaware, N. Y. & Wayne, Penn.	I. Br. 60-1	Lordville Interstate Suspension Bridge (Ch. 360 Laws 1936)	0.08	Repairs & Alterations (4" Timber Deck)	$800 Plans $5	15,000
DISTRICT No. 10, M. E. GOUL, District Engineer, 325 W. Main Street, Babylon, L. I., New York						
Kings (Int. Tour. Rte. 278)	FIGE 60-1	Interstate Route Connection 512, Gowanus Expressway (36th Street to 53rd St.) Project I-U-278-1(46)	0.84 (1.48 Acc.)	Reinf. Conc. Roadway (on Viaduct) = 0.82 Miles Misc. Work = 0.02 Mi. Sheet Asph. Pavt. (Streets and Ramps) = 1.42 Miles; Cem. Conc. Pavt. (Ramps) = 0.06 Mile; Steel Elevated (Viaduct) Struct. 82 Sp. 4,322.5'	$700,000 Plans $10	12,667,000
Nassau & Suffolk	FARC 60-2	Mineola Village-Jericho Turnpike, S.H. 1785 Wantagh-Central Park, Pt. 3, S.H. 42-3, Massapequa-Glen Cove, S.H. 9017; Coram-Middle Island East, S.H. 8291 Project F-1000(8); F-488(5); S-212(3); S-377(4)	2.54	Drainage & Misc. Work	$50,000 Plans $5	912,000
Nassau (Rte. 25)	FASH 60-20 FARC 60-12	Jericho Turnpike-Floral Park Village Jericho Turnpike, S.H. 9020 Project U-1000(3)	0.76	Demolition of Buildings	$16,000 Plans $5	297,000
New York	FAHRD 60-1	Harlem River Drive (Contract No. 139A) (143rd Street to 145th Street and 153rd Street to 155th Street) Project U-1133(6)	0.35	9" Cem. Conc. Pavt. with Carb. Black = 0.13 Mile Asph. Mac. Pavt. = 0.15 Mi.; Asph. Conc. Pavt. = 0.07 Mi. Rehabilitating Macombs Dam Bridge	$50,000 Plans $5	896,000
New York (Int. Tour. Rte. 95	FICBE 60-1	Interstate Route Connection 511 (Cont. 3) Cross Bronx Expressway (Highbridge Interchange) Project I-95-1(36)	0.13	9" Cem. Conc. Pavt. 26' Var. Wide = 0.09 Mi.; Misc. Work = 0.04 Mi. Highbridge Interchange Ramps: 3 Hy. Sps. Plate Girders 385', 411 'and 317"; Rehabilitating Struct. No. 20 Plate Girder; Misc. Work on Alexander Hamilton Bridge	$180,000 Plans $10	3,313,000

Any projects in this letting that are on the Federal Aid highway systems are subject to the provisions of the "Federal-Aid Highway Act of 1956", being Public Law 627, 84th Congress, approved June 29, 1956, and are also subject to the applicable New York State statutes.

In compliance with the provisions of Section 115 (Prevailing Rate of Wage), Public Law 627, the minimum wages to be paid laborers and mechanics are included in wage schedules that are set out in the bid proposal.

Maps, plans, specifications and proposal forms may be seen and obtained at the office of the State Department of Public Works, Bureau of Contracts, Albany, N. Y., and at the office of the District Engineers noted above, and may also be seen at the office of the State Department of Public Works, 270 Broadway, New York City.

The deposit for Plans and Proposal Forms for each contract is indicated above. A refund will be made in full to bidders for return of one set, in good condition, within 30 days of award, or rejection of bids; refund for all other sets in good condition, similar period, will be 50% of deposit.

Special attention of bidders is called to "Information for Bidders" in the Public Works Specifications, and to the special provisions applying to projects financed with federal funds. Award of a contract is subject to priorities and allocations under the Defense Production Act of 1959, as Amended, and all regulations issued thereunder.

Proposal for each contract must be submitted in a separate sealed envelope with the name and number of the contract plainly endorsed on the outside of the envelope. Each proposal must be accompanied by draft or certified check payable to the order of the "State of New York, Commissioner of Taxation and Finance" for the sum as specified in the advertisement and the proposal. The retention and disposal of the bidding check, the execution of the contract and bond shall conform to the provisions of the Highway Laws, as set forth in "Information for Bidders".

The right is reserved to reject any or all bids.

J. BURCH McMORRAN
SUPT. OF PUBLIC WORKS

OFFICIAL PROPOSALS

Bids: January 20, 1960

Construction of So. Capitol St. Underpass at "M" St.

District of Columbia—Highway Construction—Department of Highways & Traffic, Dec. 16, 1959. CONSTRUCTION OF SOUTH CAPITOL ST. UNDERPASS AT "M" ST., FEDERAL AID PROJECT NO. F-316), consisting of approx. 39,800 cu. yds. Unclassified Excavation; 20,000 cu. yds. reinf. Portland Cement Concrete Pavement, 10"; 1,720 cu. yds. Class BB wall concrete; and 20,300 cu. ft. Class B stone masonry (Invitation No. C-6078-H). Bid forms, plans and specifications are now available from Supervisor, Bid & Contract Division, Procurement Office, D. C.; Rm. 404, 499 Pa. Ave., N.W., upon deposit of a certified check for $50.00 per set, payable to D. C. Treasurer. (Phone NA 8-6000, Ext. 2378). SEALED BIDS to be opened 3:00 PM, EST, January 20, 1960, in Room 424, 499 Pa. Ave., N.W. "On January 5, 1960, at 2:00 PM (EST) in Room 500, District Building, 14th and E Streets N.W., Wash., D. C., pre-bid meeting will be held with prospective bidders to answer questions bidders may have on this project."

Bids: February 16, 1960

Main Sewage Treatment Plant Additions

NOTICE IS HEREBY GIVEN that sealed proposals for "Main Sewage Treatment Plant Additions, Stage 3—Sludge Digestion, Grit and Screenings Handling Facilities" will be received by the City of Rochester Purchasing Agent at his office, Room 36, City Hall, No. 20 South Fitzhugh Street, Rochester 14, New York, until 11:00 o'clock A.M. Eastern Standard Time on February 16, 1960, at which place and time they will be publicly opened and read aloud. The proposals shall be for furnishing all material, equipment and labor for the construction and erection of structures and appurtenances, in accordance with the Plans, Specifications and other Contract Documents, prepared by Nussbaumer, Clarke & Velzy, Consulting Engineers for the City of Rochester.

The work is subdivided into four separate Contracts, as follows:

Contract 3A—General Construction
Contract 3B—Piping Equipment and Plumbing
Contract 3C—Electrical Construction
Contract 3D—Heating and Ventilating

Contractors may submit proposals for any one, all four, or any combination of the Contracts.

These Plans, Specifications and other Contract Documents may be examined at the office of Nussbaumer, Clarke & Velzy, 327 Franklin Street, Buffalo 2, New York, and 500 Fifth Avenue, New York 36, N. Y., and may be examined and copies thereof may be obtained at the office of the Purchasing Agent. One copy of the said documents may be obtained upon payment of $100.00 deposit; any bidder returning such copy in good condition within thirty (30) days following the opening of proposals will be refunded $100.00 and any non-bidder so returning such copy will be refunded $50.00.

The City of Rochester reserves the right to reject any or all proposals, and to waive any informalities, and to make an award to other than the low bidder, should the best interest of the City thereby be promoted.

Proposals shall be made on the form provided in the Contract Documents, and each proposal shall be accompanied by a certified check made payable to the City of Rochester, N. Y., in an amount not less than five percent (5%) of the total amount of the proposal, conditioned that the bidder will execute the Contract and deliver the required Performance Bond for the proposed work within ten (10) calendar days after the date of written notice that his proposal has been accepted. For proposals with total amounts in excess of $200,000, or proposals for work financed or aided by any Federal or State agency, a bid bond in the amount of five (5) percent of the amount of the proposal, in proper form, executed by a surety company acceptable to the City, will be accepted in lieu of the aforesaid certified check.

A bidder may not withdraw his proposal within forty-five (45) calendar days after the opening of proposals, but may withdraw his proposal at any time prior to the scheduled time for the opening of proposals.

KENNETH E. PUNNETT
Purchasing Agent
City of Rochester, N. Y.

Dated: Dec. 31, 1959.

OFFICIAL PROPOSALS

Bids: January 14, 1960

Construction of Two General Cargo Vessels

The Iraqi Maritime Transport Company, Baghdad, invites Consulting Engineers and Naval Architects, to submit their offers for preparing drawings, technical specifications, tender conditions, the study of Tenders obtained based on their designs, and if necessary the supervision of the construction of Two numbers 5000 to 6080 tons dead weight general cargo vessel.

Offers shall be sent in a closed sealed envelope by registered mail, or delivered by Hand against receipt, and marked:—

"Tender for design and Supervision of building of Two general Cargo Vessels"., to

The Director,
The Iraqi Maritime Transport Company
Shara El-Saadoun,
Baghdad,
Iraq.

Outline Specifications, conditions and other information can be obtained from:

a. The Iraqi Maritime Transport Co., Baghdad or Basrah
b. Iraqi Republic Representatives abroad.

All offers shall be submitted and must reach The Iraqi Maritime Transport Company, Baghdad, before 12 Noon Thursday 14th January 1960.

The specifications are also available at the Embassy of Iraq, 2135 Wyoming Avenue N.W., Washington, D. C.

THE DIRECTOR
IRAQI MARITIME TRANSPORT CO., LTD.

Bids: February 16, 1960

Philadelphia, Penna. Procurement Department Water Department

Sealed bids will be received in Room 313, City Hall Annex, until 2:30 P.M. (E.S.T.) on Tuesday, February 16, 1960, and opened at that time, for Bid No. 2464—Work No. SD-243-SW.

Intercepting Sewer in Vare Avenue, Delaware River Port Authority R/W, Private Property and 26th Street between Mifflin Street and Drainage R/W (former Shunk Street) South of Passyunk Avenue (LOWER SCHUYLKILL EAST SIDE INTERCEPTING SYSTEM).

PRINCIPAL ITEMS OF WORK	
Excavation in Tunnel	6,450 cu. yds.
Vacuum Processing in Tunnel	19,210 sq. ft.
5'3" dia. Concrete Sewer in Tunnel	4,193 lin. ft.
Manholes (on Tunnel or in Shafts)	8

Proposal forms, questionnaires and specifications may be obtained from the Water Department, in Room 1132, City Hall Annex, Juniper Street and Filbert Street, Philadelphia 7, Penn. Blueprints of plans may be purchased at bidder's expense, directly from the Keystone Blue Paper Company, 1230 Arch Street, Philadelphia 3, Penna.

No bids will be received unless bidder is qualified by the Procurement Commissioner. The questionnaire form with all questions fully answered must be filed with the Water Commissioner, 1113 City Hall Annex, at least one (1) week prior to the date of opening bids.

Each proposal must be accompanied by security in form and amount as set forth in the proposal form.

CONTRACTORS
WATCH
THIS SECTION
for New Projects

Publish your announcements thru the "Proposal Section" of Engineering News-Record and get their bids.

OFFICIAL PROPOSALS

Bids: See Advertisement

The Port of New York Authority

Sealed proposals for the following work will be received at the Office of the Chief Engineer, Room 1100, 111 Eighth Avenue, New York 11, N. Y., until 2:30 P.M. on date indicated, at which time said proposals will be opened and read in Room 1108.

Contract BT-120.021—Port Authority Bus Terminal—Alterations to Rooms 1301-1303, Main Concourse—No deposit required—Bids will be received until 2:30 P.M. on Tuesday, January 26, 1960.

Contract BT-120.022—Port Authority Bus Terminal—Alterations to Room 2226, Suburban Concourse—No deposit required—Bids will be received until 2:30 P.M. on Tuesday, January 26, 1960.

Contract PN-560.007—Port Newark—Buildings 263 & 264—Deposit $30.00 per set of documents—Bids will be received until 2:30 P.M. on Tuesday, February 2, 1960.

Contract documents may be seen at the Office of the Assistant Chief Engineer for Design, Room 1115, 111 Eighth Avenue, New York 11, N. Y. Documents will be furnished upon receipt of the above deposit (each set including one copy of the Contract Drawings) for not more than three sets to any one company. Additional sets will be furnished upon payment of an amount for each set equal to the deposit indicated above, which payment is not returnable. Deposits and payments shall be delivered to the Treasury Department, Room 1001, where a receipt will be issued. The receipt shall be delivered to Room 1115, where the documents will be furnished.

Those who have submitted a bid on the contract directly to the Authority will receive a refund of the deposit for each set of documents, not exceeding three, returned within forty days after the opening of proposals. Those who have not submitted a bid will receive a refund of one-half of the deposit for each set of documents, not exceeding three, returned within forty days after the opening of proposals.

THE PORT OF NEW YORK AUTHORITY
S. Sloan Colt, Chairman

New York, January 7, 1960.

Bids: February 2, 1960

Road Work Warren County, New York

Notice is hereby given that the Warren County Board of Supervisors will receive sealed bids until 10:30 A.M. Eastern Standard time on February 2, 1960 by Leslie Hayes, Clerk of the Board of Supervisors, Warren County, Lake George, New York for:

GLENS FALLS EAST-WEST BYPASS
COUNTY ROAD 70

Maps, plans, specifications and proposal forms may be seen and obtained at the office of Herrick Osborne, County Superintendent of Highways, Warrensburg, New York.

The deposit for plans and proposal forms for the Contract is $20.00. A refund will be made in full to bidders with the return of each set in good condition, within 30 days of award, or rejection of bids.

Special attention of bidders is called to the New York State Department of Public Works, Division of Construction Specifications dated January 2, 1957, which may be obtained from the Department of Public Works, Alfred E. Smith Building, Albany, New York.

Proposal must be submitted in a sealed envelope with the name of the project plainly endorsed on the outside of the envelope. Each proposal must be accompanied by draft or certified check payable to the order of Romney C. Patterson, Warren County Treasurer for the sum of $18,000.00. The retention and disposal of the bidding check, execution of Contract and bond shall conform to the provisions of the Highway Laws as set forth in "Information for Bidders."

The right is reserved to reject any or all bids.

Herrick Osborne
Superintendent of Highways
Warren County, New York

EMPLOYMENT NATIONAL COVERAGE OPPORTUNITIES

DISPLAYED RATE:

The advertising rate is $39.20 per inch for all advertising appearing on other than a contract basis. Frequency rates quoted on request.

An advertising inch is measured 7/8" vertically on a column—3 columns—30 inches to a page.

Subject to Agency Commission.

UNDISPLAYED RATE:

$2.40 per line, minimum 3 lines. To figure advance payment count 5 average words as a line.

Position Wanted ads take ½ of above rate.

Box numbers—count as 1 line.

Discount of 10% if full payment is made in advance for 4 consecutive insertions.

Not subject to agency Commission.

Send NEW Ads and Inquiries to Classified Advertising Division or ENGINEERING NEWS-RECORD, P. O. Box 12, N. Y. 36.

ENGINEER
OVERSEAS
on
Multi-Purpose Dam in Thailand

24-Month Contract

Graduate Civil Engineer with five or more years first order survey experience. Prefer engineer with previous concrete dam experience. Ability to supervise and instruct. English speaking Thailand graduate Civil Engineers. Prefer mature man willing to go in bachelor status. Must pass physical examination and security investigation.

- EXCELLENT SALARY
- OVERSEAS BONUS
- COMPLETION INCENTIVE
- EXTRA VACATION ALLOWANCE
- MEDICAL CARE & INSURANCE

Write fully, include complete salary information to:

SVERDRUP & PARCEL ENGINEERING CO.
915 Olive Street St. Louis 1, Mo.

CITY OF PALO ALTO
Public Works Executive
$690 to $965 Per Month

City of Palo Alto is accepting applications from qualified persons for position of Asst. Supt. of Public Works. Position has administration of Street and Park Maintenance Divs. Park maintenance and construction experience desired; knowledge of street repair and maintenance necessary. Age to 45. Citizen. Desire college grad with CE degree as background. Must have 5 yrs. responsible administrative or supervisory experience. Starting salary dependent on qualifications. Liberal benefits. **Contact Personnel Office, City Hall, 1313 Newell Rd., Palo Alto, California.**

DESIGNERS — ENGINEERS
McKEE

continues to expand and offers permanent opportunities to designers qualified by experience, and who have continued interest, in design and or checking in:

STRUCTURAL
PIPING
MACHINE DESIGN
CONVEYOR DESIGN
INSTRUMENTATION
PRESSURE VESSELS

as applicable in the design of Steel Plants • Blast Furnaces • Open Hearths Sintering Plants • Oil Refineries • Chemical Plants and Heavy Industry.

Send detailed resume and photo to
G. VICTOR HOPKINS
ARTHUR G. McKEE & CO.
2300 Chester Ave., Cleveland 1, Ohio

MECHANICAL and ELECTRICAL ENGINEERS

Challenging assignments open with U. S. Government technical assistance power projects in newly-developing countries.

Require engineering degree, 15 years progressive experience, plus ability to draw up and evaluate programming proposals and advise foreign technicians and U. S. contractors.

Foreign assignments broaden professional experience, offer personal advantages, may lead to career service with Agency. Salaries to $12,980 plus variable benefits.

Write: Chief of Employment, Box ENR-1, International Cooperation Administration, Washington 25, D. C.

SALESMAN

Excellent opportunity with one of Philadelphias' oldest and largest distributors of Construction equipment.

SERVICE SUPPLY CORPORATION
20th and Erie Avenue Phila. 32, Pa.

ENGINEERS

Civil engineers for design of hydroelectric projects. Minimum six years of experience in powerplants, dams, spillways, and gates. Send complete resume of experience and qualifications to Personnel Department.

HARZA ENGINEERING COMPANY
400 W. Madison St. Chicago 6, Illinois

CONSTRUCTION MANAGER

With heavy experience background in dams, tunnels and hydroelectric projects. Work domestic or foreign. Salary commensurate with experience. Write:

P-3097, Engineering News-Record
Class. Adv. Div., P.O. Box 12, N.Y. 36, N.Y.

ADDRESS BOX NO. REPLIES TO: Box No. Classified Adv. Div. of this publication. Send to office nearest you.
NEW YORK 36: P. O. Box 12
CHICAGO 11: 520 N. Michigan Ave.
SAN FRANCISCO 4: 68 Post St.

• POSITIONS VACANT

Engineers And Draftsmen—experienced in water supply, water distribution, sewerage or sewage treatment plant design. Excellent opportunity with growing firm. Salary commensurate with ability. Paid vacations, holidays, hospitilization. Address reply with resume to: O'Brien & Gere, Consulting Engineers, 400 East Genesee Street, Syracuse 2, New York.

Construction Superintendent—Qualified to assume full responsibility for direction of lump-sum multi-million dollar freeway project in downtown area of Southern city. Project includes grade separations of all types, drainage and sewer systems. Degree in Civil Engineering preferred, but not mandatory. Salary open with good future assured. Mail complete resume to P-3284, Engineering News-Record.

Chief Engineer—Medium sized steel fabricating plant located Mid West. Sales, Estimating and engineering. Excellent opportunity, salary open, give full particulars and salary requirements, all replies confidential. P-3294, Engineering News-Record.

Industrial Engineer—Western Penna. Fabricator—Prefer man under 40—Starting salary approx. $725—State shop experience, etc. in first letter to P-3292, Engineering News-Record.

Production Manager—Structural steel—Mid-Atlantic area—State salary requirements—Shop experience in first letter to P-3287, Engineering News-Record.

Civil Engineers (2); prefer 1 M.S. in Soils and 1 B.S. Experience not necessary. U.S. Citizen. Reply in full giving availability and salary desired. Arizona Testing Laboratories, Box 1888, Phoenix, Arizona.

Wanted experienced superintendent on high rise building construction by New England contractor with a national operation. Applicant must have proven record. Send all information to P-3307, Engineering News-Record.

Have opening for several recent Civil Engineer Graduates with military obligations completed who desire to learn the construction business. Ambitious, aggressive, dependable, use no intoxicants, willing to start in the field on industrial building and heavy construction, and willing to move. Must be single. We operate throughout Kansas and adjacent states; offer excellent opportunity for advancement. Top wages. Martin K. Eby Construction Co., Inc., P. O. Box 1679, Wichita, Kansas.

Bridge Design Engineer, who is able to take charge of project from inception to completion. Salary open. Apply Ivan R. Bray, Director Personnel, City Hall, Sioux City, Iowa.

Senior Sanitary Engineer to act as consultant to public and private officials in the state on matters of sewage treatment and disposal, water supplies and treatment plants. Requires engineering degree and 3 years' experience in the above or equivalent combination of experience and training. Send complete resume to B. Dearington, Connecticut State Department of Health, State Office Building, Hartford, Connecticut.

(Continued on opposite page)

ASSISTANT PUBLIC WORKS DIRECTOR

ROCKVILLE, MARYLAND

Rockville, Maryland, a rapidly expanding residential suburb of Washington, D.C., with a population of 27,000, has an opening for an Assistant Public Works Director to supervise its Engineering Division and to assist in directing its overall public works operation, which includes water and sewer utilities.

Qualifications: degree in engineering, several years' municipal experience and some supervisory experience in public works design, construction and maintenance. **Position available February 1, 1960. Salary range $8,112—$9,152, in yearly increments, with generous fringe benefits.** Submit complete resume, including personal history, education, experience and references, to the **City Manager, 120 South Washington Street, Rockville, Maryland.**

• POSITIONS VACANT
(Continued from opposite page)

Wanted—Estimator for General Construction. Excellent opportunity for one who can qualify. Must be familiar with takeoff, pricing, purchasing, sub-contracts. For more details send complete resume to Sollitt Construction Company, Inc., 301 Columbia Street, South Bend (24), Indiana.

Civil Engineer wanted. Qualified civil engineer to head Engineering Department of City of New Berlin, Waukesha County, Wisconsin. Make application in writing before January 18th, 1960, to Joseph Rausch, City Clerk, 15445 W. Grange Road, New Berlin, Wisconsin, showing experience and qualifications and references.

Graduate Civil Engineer under 40. Salary open, depending on experience. Submit resume to Henry F. Beisner, City Engineer, Cedar Falls, Iowa.

Municipal Engineer—Civil Engineer with municipal experience, particularly in street, sewerage and drainage work. Must be able to qualify as Chief of Party. Salary range $5600.00 to $6400.00. Board of Public Works, George R. Winters, Director, Town of Wakefield, Mass.

Layout Engineer. For Chicago General Office Engineering Department of leading national food processing company. Board work on plant and equipment projects. Career opportunity for man with Mechanical or Civil Engineering degree and 3-5 years' experience in food or related fields. Excellent salary and liberal company benefits. In reply give complete personal data, experience and education. P-3356, Engineering News-Record.

Wanted—Experienced first class estimator to take-off quantities on piping, ductwork, etc., for large insulation contractor in North Jersey. Apply The Trybee Co., 381 North Midland Avenue, Saddle Brook, N. J. or call SW 1-1170.

Cartographer Urgently Needed in Guam. Salary—$5980.00 to $7475.00 per annum. Two-year contract offered. Furnished housing provided at reasonable rental rate 26 days leave per year. Transportation for employee and dependent furnished to and from Guam. Experience: (a) Bachelor's degree from engineering school or college with major study in surveying; or (b) Graduation from high school, plus four years progressively responsible experience, including cartography, cadastration, geodesy, engineering, and photogrammetry; or (c) Any equivalent combination of experience and training. Travel and processing take about 3 to 4 months. For further information, write via air mail to: R. W. Galloway, Director, Department of Labor and Personnel, Government of Guam, Agana, Guam.

National General Contractor desires top flight building construction executive to head up branch office in Chicago area. Only fully qualified persons need apply. Send complete resume of experience and qualifications to: P-3382, Engineering News-Record.

City Engineer—Able to register as a Civil Engineer in the State of Florida—Salary Maximum $7,500.00. Kindly send resume to G. F. Althouse, City Auditor and Clerk, City of Ormond Beach, Florida, P. O. Box 695. All replies confidential.

• POSITIONS WANTED

Project Management, Contract Negotiations, Administration. 23 yrs. exp. hvy. constr. highways, bridges, harbors, etc., U.S.&O.S. PW-3253, Engineering News-Record.

Superintendent Construction 20 yrs Institutional Groups, Industrial, Commercial Engineer. PW-3275, Engineering News-Record.

CIVIL or SANITARY ENGINEERS — TWO —

- **Starting Salary Open**
- **Career Opportunity**
- **Consulting Firm of National Reputation**
- **Advancement potential Unlimited**
- **Work Varied**

Qualifications Desired: Top caliber men having engineering degree with minimum 8 years practical experience in planning, report writing, design and operation of sewage and industrial waste collection, treatment, and disposal facilities. Limited travel; location Pennsylvania area.

P-3239, Engineering News-Record
Class. Adv. Div., P.O. Box 12, N.Y. 36, N.Y.

CONSTRUCTION SUPERINTENDENT

With heavy experience background in tunnel lining and concrete spillway. Salary commensurate with experience.

Write: P.O. Box 7695, Lakewood, Colorado

POSITION: Supervising Engineer, Transportation Planning and Engineering.
REQUIREMENTS: Civil Engineer who can assume responsibility for preliminary design and cost analysis for metropolitan highway system. Position requires imagination and ability to deal with urban highway location problems.
SALARY: $10,000 to $12,000 per annum, depending on qualifications.
PENN-JERSEY TRANSPORTATION STUDY
51st St. and Parkside Ave., Philadelphia 31, Penn.
(Attn: Robert S. Winchester, Administrative Officer)

PURCHASING AGENT

Construction engineering and fabricating company with new plant in northeastern Virginia needs Purchasing Agent with some construction and steel fabricating experience. Both technical and administrative ability required. Excellent housing and living conditions available. Salary $8,000-$10,000 per year. Send resume.

P-3331, Engineering News-Record
Class. Adv. Div., P.O. Box 12, N.Y. 36, N.Y.

• POSITIONS WANTED

Construction Supt. 32 years of construction experience in Commercial, Public and Industrial. Will assume responsibility with integrity. Location preference Southeast—best references. PW-3144, Engineering News-Record.

Construction Supt. General Construction. PW-8896, Engineering News-Record.

Executive, broad experience in all phases of Building and Heavy Construction, seeks contacts with large volume contractors requiring top man to assume full responsibility. C. O. Sutherland, 47 Rich Avenue, Mount Vernon, N.Y. Telephone MO 4-7927.

Construction Supt. Bonafide producer at job or general superintendent level. Engineering background. Eighteen years experience on medium heavy industrial, commercial and institutional work. Available immediately. PW-3308, Engineering News-Record, or phone Akron, Ohio, Walnut 3-9698.

Project Manager, B.S.C.E., 16 yrs. exp. Hvy. Const., Hwys., Flood Control, Earthwork, Bldgs., Govt. Contracts. Field & Office. E. Eiswirth, P.O. Box 48, Clayton 5, Mo.

Project Manager experienced public works Penna. or New York area. PW-3283, Engineering News-Record.

Construction Foreman or Rigging Supt. 25 yrs. experience. Available now. Hydro work a specialty. Speak Portuguese and understand Spanish. PW-3224, Engineering News-Record.

Hydraulic engineer, broadly experienced (some foreign) in river developments, including hydroelectric, storage, irrigation, pumping, supply, control, channels, drainage. Fluent Spanish. PW-3227, Engineering News-Record.

Executive—Contracts Manager, Attorney, Administrator, 15 yrs Legal-Construction Experience, Gov't. contracts, employed. PW-2947, Engineering News-Record.

Engineer, Estimator, Superintendent—available Jan. 1st. 3½ years college, civil engineering, experienced in heavy construction, pile driving, railroads, bridges, docks and marine work. Will furnish complete resume and references on request. Age 43. PW-3363, Engineering News-Record.

General Superintendent. Wide experience in buildings, proven producer, pilot. PW-3218, Engineering News-Record.

• POSITIONS WANTED

General Superintendent: Have been responsible for administrative direction of project operations, such as, change orders, negotiation of sub-contractors, coordination of contractor's labor forces, processing of owner and sub-contractor requisitions, handling claims, prepared schedules and progress reports, & complete charge of field personnel. Experience in missile sites, hospitals, hangars & servicing docks, factories, & mass housing. Supervised work in Fla., Ill., Pa., N. J., Conn., Ala., & Del. areas Will re-locate. PW-3357, Engineering News-Record.

Estimator-Construction Executive. Age 31— can handle takeoff, pricing, completing bid. Experienced as manager of branch office operation, handling client relations, negotiating, extras and all other phases of activity from estimate to closing. Free to travel or relocate. PW-3354, Engineering News-Record.

Struct. Civil Engr. 30 B.S.C.E. married, 8 yrs exp. design & constr., highways, railroads, bridges, air bases, industrial bldgs., 5 yrs overseas, Canada, Greenland, Far East. Some French & Spanish. Desires overseas position, available immediately. PW-3365, Engineering New-Record.

Telephone & power cable splicer 30 yrs exp. Supervise or Splice. Willing to travel. PW-3351, Engineering News-Record.

Building const. estimator, 42, presently employed New York. Smart bidder public works, schools, corps, etc. Hold sharp field control. Astute businessman. Strong alone, or part of team. A real money asset. Interested opportunity, preferably good mild climate. PW-3348, Engineering News-Record.

Graduate engineer 18 yrs. exp. in heavy industrial design and construction, last 10 yrs. in executive capacity, desires position as Project Manager, preferably Latin America. Fluent Spanish. PW-3346, Engineering News-Record.

Bridge-Structural Engineer-Designer, experienced, 15 years practice, certain in Stress-Analysis and Theories of Structure, available January. PW-3340, Engineering News-Record.

Reinforcing Steel Estimator-Detailer, twelve years. Three years supervisory. To locate West or Southwest. PW-3397, Engineering News-Record.

Registered Engineer 20 yrs. experience, can assume immediate full charge all phases of water or sewer projects any size; U.S. or foreign. PW-3401, Engineering News-Record.

Construction engineer, 37, P.E., 17 yrs. experience. In full charge of small g.c. firm past 7 years.—bldg. construction, alterations, public work. Will be top-notch member of team—N. Y. area. PW-3398, Engineering News-Record.

Electrical Superintendent. Experienced in steam & hydro power stations, industrial plants, substations, transmission lines engineering background. PW-3399, Engineering News-Record.

Contracting Firm wants graduate engineers to work in Rocky Mountain area, must have previous construction experience. P-3318, Engineering News-Record.

Executive, 15 yrs legal-construction work, experienced administrator, government contracts, trouble-shooter, employed, will travel. PW-3355, Engineering News-Record.

Electrical Engineer, BEE, Reg PE, 37, 14 years diversified experience in industrial power and control, power distribution, and petroleum-electric fields. Will complete fourth foreign contract in March. Speaks French, Spanish. Seeks position with engineering-construction firm. PW-3352, Engineering News-Record.

Superintendent, Project Mgr., Proj. Engineer, age 48, heavy constr., water works, dams, refineries, grad. registered engineer, US citizen, speaks French, Spanish, German, Dutch, prefers foreign assignment. T. deFruyn, Rte. 1, Box 246-A, Las Vegas, Nevada.

Wanted: Employer in heavy construction civil eng., age 29, married, ambitious industrious very anxious to learn. PW-3316, Engineering News-Record.

Executive: Project management, Contract Negotiations & Administration, Claims. 23 yrs. exp. bridges, waterfront, highways, earthwork, etc. U. S. & O. S. PW-3380, Engineering News-Record.

Eng., 38, Estimate, Bid, Field Supervision and layout on sewer, drainage, waterline, concrete & earthwork projects, available S.W. N.E. or Mid-West—Reply 4905 Quitman, El Paso, Texas.

SEARCHLIGHT SECTION

ADDRESS BOX NO. REPLIES TO: Box No. Classified Adv. Div. of this publication. Send to office nearest you.
NEW YORK 36: P. O. Box 12
CHICAGO 11: 520 N. Michigan Ave.
SAN FRANCISCO 4: 68 Post St.

• CONTRACT WORK WANTED

Design & detailed plans on sub-contract. Water & Sewage works; Plant or underground. CWW-3250, Engineering News-Record.

BUSINESS OPPORTUNITY

Wanted—partner for highway Culverts and Municipal work small outfit for Iowa (By) Established prequalified contractor will finance and bond. BO-3378, Engineering News-Record.

STRUCTURAL ENGINEERING
ARCHITECTURAL ENGINEERING
OUR COURSES of instruction by mail HAVE HELPED THOUSANDS to better positions and to pass State Board Examinations. Forty-eighth year.
Write today without obligation.
WILSON *Engineering Corp.*
College House Offices HARVARD SQ., CAMBRIDGE, MASS.

CONSTRUCTION SUPERVISION
Exclusive Training Course by mail for top positions. Publishers Manual of Advanced Construction Management. Send postcard for details.
National Schools of Construction
Est. 1952
Satsuma, Florida

Wanted — Used
Marion—Page or Bucyrus
14 to 20 yard Dragline
Only Clean Rigs will be considered.
Must be in good operating condition.
Reply by letter only—Full details—Price (cash) Location—Delivery
CLEVELAND CONTRACTORS EQUIPMENT CO.
10904 Brookpark Road
Cleveland 30, Ohio

WANTED
PILE HAMMER
Union 1½A Pile Hammer
W-3233, Engineering News-Record
Class. Adv. Div., P.O. Box 12, N.Y. 36, N.Y.

FOR SALE OR RENT
2½ YD. LINK-BELT CRANE-DRAGLINE
K-595, 140' BOOM & JIB
CAT. D17000 ENGINE
50 TON AMER. DIESEL LOCOMOTIVE CRANE. 1946
30 TON BROWNING DIESEL LOCOMOTIVE CRANE
44 TON GEN. ELEC. DIESEL ELEC. LOCO.
25 TON WHITCOMB DIESEL ELEC. LOCO.
60 TON MANITOWOC 3900 CRANE
AMERICAN #140 3D DIESEL HOIST
90 HP LIDGERWOOD 2D DIESEL HOIST
Also Other Constr. & Ry. Equip.
WHISLER EQUIPMENT CO.
1905 Railway Exchange Bldg., St. Louis 1, Mo.
CHestnut 1-4474

FOR SALE
1—1955 Haiss Heavy Duty Bucket Loader
Type—Wheel mounted—4 wheel drive Model —135 W-4
Size—8 cubic yards per minute rated capacity.
GOTHAM SAND & STONE CORPORATION
Box 269 Port Washington, New York PO7-3860

Air Compressors
600 CFM
Hydraulic Air Tracs—4 in. and 4½ in. Drills with 12 ft. Feed.
60—900 CFM Compressors
also available.
FOR RENT OR SALE
Subject to prior sale or disposition.
L. B. SMITH INC.
Syracuse, N. Y. *Phone GR 5-2196*

FOR SALE
P & H Model 955-A 2½ c.y.
Waukesha Engine, Mod. 6 WAKD
Combination Dragline, Shovel & Crane
Serial #20077—$42,000.00
WINSTON-GREEN-DRAKE
Box 54, Pierre, S. D.
Capitol 4-5804

SALE OR RENT
25 & 45 Ton G. E. Diesel Electric Locomotives
65 Ton Porter Diesel Electric Locomotive
30 & 40 Ton Diesel Locomotive Cranes
250 H.P. I.R. Electric Compressors
B. M. WEISS COMPANY
Girard Trust Bldg. Philadelphia 2, Pa.

LOW COST INSTALLATION AND OPERATION
CABLEWAYS
IMMEDIATE SHIPMENT
ELECTRIC, STEAM OR DIESEL CAPACITY 3 TO 20 TONS
SELL, RENT OR BUY
FOR DAMS, BRIDGES, BREAKWATERS, FILTRATION AND SEWERAGE PLANTS
FOR SPEED, ECONOMY, EFFICIENCY, FLOOD SAFETY, LABOR REDUCTION
AMBURSEN DAM CO. INC.
295 MADISON AVE. NEW YORK

FOR SALE
2 Ingersoll Rand 600 Gyro Flo Portable Air Compressors, GM 6-71 Diesel Engines—4, 7:50 x 16 Tires—Serial Nos. 11760 & 11767.
1 Rex Model 200 Double Pumpcrete Powered by a Model 6 MZA 203J Waukesha Gasoline Engine—Skid Mounted—Incl. Rex Pugmill Remixer— with 300' of 8' Pipe and Accessories. S/N CPD-316.
ALL IN TOP CONDITION
CONSTRUCTION EQUIPMENT CO.
21720 West 8 Mi. Rd. Southfield, Mich.

PUMPCRETE MACHINE
FOR SALE. REX Model 160-S PUMPCRETE Machine, Serial CZ669, complete with approx. 500 ft. 6" pipe and assorted fittings and specials. Good condition. Operated approx. 100 hrs. since complete factory overhaul.
CARLO BIANCHI & COMPANY, INC.
Framingham (Tel. TRinity 2-4341) Mass.

Ten Terratrac's
FOR SALE
Some with loaders, dozers, etc.
Will quote prices delivered anywhere in the U. S. —Write, wire, or call
WESTERN SUPPLY CO., 2427 Myrtle Ave.
El Paso, Texas *or call KE 24697*

Michigan 125-A Rebuilt	$10500.00
977 Cat. 1957 excellent	13500.00
TD 14-A very good	7250.00
3-DW 21 excellent...Ea.	18500.00
3500 Mani. dragline w. bkt.	34500.00

General Eq. Co. Box 35, Inwood LI. N.Y.

FOR SALE
CABLEWAY complete
Two-48" Drum Hoist
125' Traveling Head Tower
165' Guyed Tail Tower—etc.
Write or wire for complete specifications.
FS-3326—Engineering News-Record
Class. Adv. Div., P.O. Box 12, N.Y. 36, N.Y.

PIPE
Surplus New & Used
FOR SALE, WANTED OR RENT

Call: HYACINTH 7-4900
PIPE, VALVES & FITTINGS
PILING • CULVERTS
ASBESTOS-CEMENT PIPE • ALUMINUM PIPE
ALBERT PIPE SUPPLY CO., Inc.
103 VARICK AVE., BROOKLYN 37, N.Y.

ASSOCIATED PIPE & FITTING CO., INC.
PILING PIPE SHELLS MANDREL FITTINGS
"H" BEARING PILE SLEEVES AND SHOES
K & M ASBESTOS CEMENT PIPE
CULVERTS CIRCLE ARCH SECTIONAL
262 RUTHERFORD BLVD., CLIFTON, N.J. • PR 3-8400

PIPE
500,000 ft. 10¾" O.D. 35#
200,000 ft 12¾" O.D. 40#
200,000 ft 8⅝" O.D. 28#
20,000 ft 16" O.D. 42#
All Machine Cleaned. Plain End. No. 1 Grade.
INDIANA-OHIO PIPE CO.
P.O. Box 5412 Shepard Sta. Phone CL. 3-5527
COLUMBUS 19, OHIO

STEEL PIPE up to 48" O.D.
WELDING FITTINGS
FLANGES • VALVES
The IDEAL SUPPLY CO.
445 Communipaw Ave.
Jersey City, N. J., DElaware 3-2600
New York Phone: DIgby 9-2454

PIPE
VALVES and FITTINGS
All Sizes in Stock
NEW—USED
GREENPOINT PIPE SUPPLY CORP.
Bogart and Stagg Streets, Brooklyn, N. Y.

SURVEYING INSTRUMENTS
USED • REBUILT • SALE
RENT • REPAIRING

TRANSITS AND LEVELS

New or Rebuilt
Sale or Rent
Headquarters for REPAIRS — any make — Factory Service We will also buy your old instruments or take them in trade.
A complete line of Engineering Instruments and equipment for field or office. Write for catalog NRL 101.
WARREN-KNIGHT CO.
Manufacturers of Transits and Levels
136 No. 12th St., Philadelphia 7, Penna.

RE-BUILT REPAIRS RENT REAL EXPERTS
BUFF
ALL MAKES

69 Dey St., New York WOrth 2-2797

HEAVY EXCAVATION EQUIPMENT
DRAGLINES, SHOVELS, CRANES, DRILLS, TRUCKS

15-W B.E. Elec. Drag, 215', 12 yd.
450-W B.E. Diesel Drag, 165' w/extra 10, 12, 13 and 14 yd. buckets.
9-W B.E. Elec. Drag, 165' 10 yd.
9-W B.E. Diesel Drag, 165', 12 yd.
7-W B.E. Diesel Drag, 140', 7 yd.
7400 Marion Diesel Drag, 175' 13 yd.
7400 Marion Elec. Drag, 175', 12 yd.
625 Page Diesel Drag, 160', 9 yd.
621-S Page Diesel Drag, 125', 7 yd.
200-W B.E. Diesel Drag, 125', 6 yd.
5-W B.E. Diesel Drag, 100' 6 yd.
2400 Lima Dragline, 130', 5 yd.
4500 Manitowoc Drag, 120' 5 yd.
120-B B.E. Elec. Drag, 115', 5 yd.
3900, 3500 & 3000 Manitowoc Cranes
111-M Marion Drag, 100' 4 yd.
1601 Lima 4 yd. Shovel/Drag
1055 P&H Drag, 80', 3½ yd.
1201 Lima Dragline, 85', 3 yd.
54-B B.E. Drag, 80', 2½ yd.
5560 Marion 26 Yd. Elec. Shovel
5480 Marion 18 Yd. Elec. H.L. Shovel
151-M Marion 7 Yd. Elec. Shovel
170-B B.E. 6½ Yd. Elec. Shovel
4161 Marion 6 Yd. Elec. Shovel
2400 Lima 4½ and 5½ Yd. H.L. Shovels
120-B B.E. 4 Yd. Elec. Shovel
111-M Marion 4 Yd. Standard Shovel
1201 Lima 3½ Yd. Standard Shovel
54-B B.E. 2½ Yd. Standard Shovel
Model T-650 REICHdrill Truck Mounted Rotary and Down-The-Hole
Ingersoll-Rand Truck Mounted Drillmaster
Joy Truck Mounted Rotary Air Drill, 6" Holes
Dixie Model CD-10B Pontoon Dredge
Euclid Trucks, rear & bottom dump
Truck Cranes, Dozers, Scrapers, Attachments

FRANK SWABB EQUIPMENT CO., INC.
313 Hazelton National Bank Bldg.
Hazelton, Pa. GLadstone 5-3658

DIESEL ENGINE GENERATOR SETS
Immediate Delivery from Inventory!



Any voltage; 50 or 60 cycle. Available in stationary, mobile or portable model.

Following listing is only partial.

1420 kva Fairbanks-Morse model 38D-8⅛ (photo above)
1375 kva General Motors model 278A
1250 kva General Motors model 567
938 kva General Motors model 567
625 kva General Motors model 278A
625 kva Amer. Locomotive Co. model 539
412 kva Worthington model CC
375 kva General Motors model 268A
312 kva General Motors model 268A
250 kva General Motors model 268A

A. G. SCHOONMAKER *Company, Inc.*
Foot of Spring St., Sausalito, Calif.
EDgewater 2-1490
50 Church St., New York 7, N. Y.
DIgby 9-4351

EUCLIDS
Scrapers—4 and 6 wheel
Bottom Dumps—late model
TC 12 Crawler Tractor
Low cash price for pre-winter clearance.
EXCEPTIONAL VALUES
All offered subject to prior sale or disposition.
Details and prices call or write:
L. B. SMITH, INC. Syracuse, N. Y. Phone GR 5-2196

RAILS—TIES
TRACK ACCESSORIES

IMMEDIATE DELIVERY FROM STOCK

EVDEL
quality
TRACK



PRECISION MADE BY MASTER CRAFTSMEN for
- **"ALLIS-CHALMERS"** HD 5/6 • HD 9/11 • HD 15/16 • HD 20/21
- **"CATERPILLAR"** D 2 • D 4 • D 6 • D 7 • D 8 • D 9
- **"INTERNATIONAL"** TD 6 • TD 9 • TD 14 • TD 18 • TD 24

... CRAWLER TRACTORS!

EVDEL INDUSTRIES, INC.
1430 BROADWAY • NEW YORK 18, N. Y. • LA 4-0900
CABLES: "EVDELINDUS"

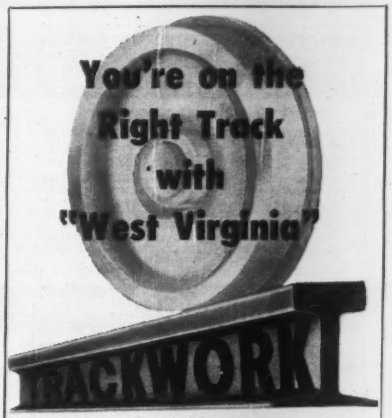

Rails, steel ties, splice and angle bars—whatever your needs, you are assured of rugged construction from quality steel when you specify "West Virginia." "One plant production" allows shipments in carloads. For further information, contact Connors Steel Division, P. O. Box 316, Huntington, West Virginia.

CONNORS STEEL DIVISION
PORTER
H.K. PORTER COMPANY, INC.

RAILROAD Cross and Switch TIES
Promptly from adequate stocks
NEW and USED *(as available)*
GILLIS & COMPANY
134 Breckenridge Lane Louisville 7, Ky
TW 5-9484

When you need RAIL . . . fast

use this section, as many contractors do, as a rail buying directory. It can save you time when you want to know, quickly, where to buy good new or used rail.

CRANES FOR RENT

CRAWLERS — Capacities to 60 tons Booms to 180 ft.
TRUCK CRANES — Capacities to 35 tons Booms to 130 ft.

P & H, Lima and Manitowoc.
Top-Condition erection cranes

ROGER SHERMAN
CRANE SERVICE, INC.
East Hartford, Connecticut JAckson 8-4106

ARMY-NAVY SURPLUS

3 ea. Ohio Locomotive Cranes. Model G. 35-ton capacity equipped with Buda or Climax Gasoline engines. 160,000# each. Todays list price $86.000

OUR PRICE—$19,500.00

1 ea. Heavy duty Osgood Yard/Mobile Crane: 40 TON CAPACITY S/N 3295, one-man operated, Caterpillar D-13000 diesel; 4ndependent travel, hoist and boom; high gantry; (factory lift chart indicates 89, 740# at 15'R) 12-1200 x 24 16-ply tires; outriggers, 60' boom; TOTAL TIME 2120 hours—today's cost $80,000 plus

OUR PRICE—$27,500.00

Above items priced for sale prior to removal from government premises at Baltimore, Md. and Norfolk, Virginia. Afterwards, expenses for removal to be added.

UNITED ROAD MACHINERY CO.
2010 S. Bellevue St. Memphis, Tennessee
WH 8-9041

FOR SALE

1—Used Lima Model 1201, New Cummins Engine and Undercarriage Rebuilt in 1958
1—Used Garwood Buckeye Trencher Model 407. New in 1958
1—Used Manitowoc 3900
1—Used Manitowoc 3500

MANITOWOC-FORSYTHE CORPORATION
37-11 Vernon Blvd.—EXeter 2-6125
Long Island City 1, New York

PILING

SURPLUS NEW and USED — For Sale, Wanted or Rent

AVAILABLE EQUIPMENT FOR SALE

2—2400 Lima Shovels, 2 highlift fronts, 1 standard front, Serial Numbers 324910, 32932
2—80-D Northwest Shovels, Serial Numbers 12774, 13186
2—TS-24 Euclid Motor Scrapers, Serial Numbers 26839, 26840. New 1958.
4—Model 65 TD Euclid Trucks, Serial Numbers 27876, 27877, 27878, 27879. 4 months old.
4—International 95 Payhaulers, Serial Numbers 677, 687, 696, 697
10—Model 2FD, 5FD, 27FD Euclids, Fair cond.
6—D-8 Tractors, #25 C.C.U., 8-A Blades, Serial Numbers 2U6233, 8162, 9720, 13645, 17002, 19142.

ALL EQUIPMENT IN FIRST CLASS OPERATING CONDITION
Central Pennsylvania Quarry, Stripping & Construction Co.
270 South Pine St., Hazleton, Penna.
Phone GLadstone 4-3551

We do a Nation-wide business in
STEEL SHEET PILING

IMMEDIATE SHIPMENT
815 pcs. 75 to 30 ft. Beth. SP-6a—New York
100 pcs. 62 ft. Beth. ZP-32—Connecticut
103 pcs. 60 ft. MZ-27—Tennessee
150 pcs. 60 ft. SP-4—W. Virginia
290 pcs. 60 to 30 ft. M-16 & M-115—Tennessee
370 pcs. 60 to 30 ft. M-115 & M-116—Indiana
150 pcs. 34-30 ft. M-116—Michigan
81 pcs. 25 ft. M-115—Mississippi
220 pcs. 15 ft. M-115—Missouri
Other lengths and sections at various locations. Storage yards at CHICAGO, BUFFALO & MEMPHIS.
Also 10" x 42# and 12" x 53# BP 60' in stock.

PILE DRIVING EQUIPMENT

VULCAN AND McKIERNAN-TERRY PILE HAMMERS & EXTRACTORS
All Sizes—For Rent & Sale—Immediate Shipment

MISSISSIPPI VALLEY EQUIPMENT CO.
1908 Railway Exchange Bldg.
St. Louis 1, Mo. CHestnut 1-4474

STEEL SHEET PILING

AVAILABLE FOR PROMPT SHIPMENT

Pcs.	Section	Length	Location
350	MP-112	60 to 64 ft.	Arkansas
275	MP-116	20 to 60 ft.	Chicago
250	MP-115	20 to 60 ft.	Chicago
80	MP-116	28 to 29 ft.	South Dakota
200	MP-115	20 to 60 ft.	Kansas City
175	MP-116	20 to 60 ft.	Kansas City
95	Mp-112	18 to 25 ft.	Kansas

CONMACO, INC.
PHONE DRexel 1-3930
804 KANSAS AVE., KANSAS CITY, KANSAS

H BEARING PILES

10 in. 42 lb. 60' lengths
12 in. 53 lb. 60' lengths
8 in. 36 lb., 10 in. 57 lb., 14 in. 73 lb., 14 in. 89 lb. 10' to 70'
BUFFALO, PHILADELPHIA, JACKSONVILLE
R. C. STANHOPE, INC.
Telephone MU 2-3076 or MU 2-1898
60 E 42nd St, New York 17, N. Y.

Need A "Lift"?
CRANES, INC.
RENTALS

Manitowoc 3900's — Crawlers 3500's
Latest Models
Long Booms and Jibs
TRUCK CRANES
Link Belt and Bay City, Cap. to 40 Tons. Booms to 200 ft. Hoists—Welders—Generators
Maspeth 78, N. Y. ST 4-1776

H & SHEET STEEL PILING

3700 PCS. BETH. SP6A. 50' 56' & 48' & 40' & 35'
1900 PCS. MP112—12', 25', 35', 40' & 60'
850 PCS. BETH.—AP3 20', 25', 30', 35', & 60'
790 PCS. BETH.—DP2—31' 35' 40' 50' 60'
1200 PCS. ZP38-ZP32—25' 36' 50' 60' & 65'
1300 PCS BP10 BP12—BP 14—55' to 60'
400 PCS. BETH. ZP27—25', 30', 35' & 40'

PILING BOUGHT—SOLD—RENTED
STOCKS: N. Y.—BOSTON—BUFFALO
TORONTO—BALTIMORE—JACKSONVILLE
CLEVELAND—RICHMOND—NEW ORLEANS

DIESEL LOCOMOTIVE
12—Gen. Elec. 100, 80, 65, 45, 25 & 23 ton
25 Ton New Whitcomb Diesel Elec.

5 WHIRLEY CRANES
4—50 Ton Elec. 150' Boom 85' Gantry
2—50 Ton, 1—28 Ton 100' Boom, Steam

R. C. STANHOPE, INC.
60 E. 42nd St. N. Y. 17, N. Y.
Telephone MU 2-3075 or MU 2-1898

"FASTER FROM FOSTER"
STEEL SHEET PILING
All sections from our regular stocks
L. B. FOSTER CO.
PITTSBURGH 30 • ATLANTA 8 • NEW YORK 7
CHICAGO 4 • HOUSTON 2 • LOS ANGELES 5

FOR SALE

EUCLIDS: Rear, Bottom and Scrapers
15W Bucyrus-Erie Dragline, 14 yd.
9W Bucyrus-Erie Dragline, 8 yd.
7W Bucyrus-Erie Dragline, 7 yd.
5W Bucyrus-Erie Dragline, 5 yd.
200W Bucyrus-Erie Dragline, 6 yd.
170B Bucyrus-Erie Shovel, 6½ yd.
120B Bucyrus-Erie Shovel, 5 yd.
54B Bucyrus-Erie Shovel, 2½ yd.
38B Bucyrus-Erie Shovel, 1½ yd.
80D Northwest Shovel, 2½ yd.
4500 Manitowoc Dragline, 5 yd.
3000 Manitowoc Dragline, 1¾ yd.
2400 Lima Dragline, 6 yd.
1201 Lima Dragline, 3 yd.
1½ yd. Marion Shovel. New in 1956
7400 Marion Walking Dragline, 9 yd.

SHOVELS—DRAGLINES—CRANES
(All sizes, makes, Crawler and walking type)
WILLIAM LUBRECHT, III
Construction Equipment
311 W. Diamond Ave. Hazleton, Pa.
Telephone GI 5-4041 or 5-0253

STEEL SHEET PILING

LARSSEN and ROMBAS Sections

STOCKS AVAILABLE IN:
- Linden, New Jersey
- Ft. Lauderdale, Florida
- Houston, Texas

WESTERN SERVICES CORPORATION
601 E. Linden Ave., Linden, N. J.
MArket 4-4000 HUnter 6-4000

In Florida Call: Port Everglades Steel Co. Ft. Lauderdale—JA. 4-6545
In Houston Call: G. Oliver—CA. 4-7234

H-BEARING PILES

Immediate Shipment
8" x 36#—12" x 53#
10" x 42#—14" x 73#
Other Sizes & Lengths—Chicago - Buffalo
Memphis - Philadelphia - Street Sheet Piling
Pile Hammers
WHISLER STEEL PILING CO.
CHestnut 1-4474
1908 Railway Exchange Bldg., St. Louis 1, Mo.

PILING IN SOUTH

200 pcs. 10 in. 42 lb. 12 in. 53 lb. 60' BP-900 pcs. MI15, MI16, DP2, 12' to 60'
E4 Extractor 9 B3 Hammer
Stocks Jax—Miami—New Orleans

THE SEABOARD STEEL CORP.
Tel. Ringling 7-0461 P.O. Box 5071 Sarasota, Fla.

FORSYTHE EQUIPMENT CO., INC.

MANITOWOC SPEEDCRANES

RENTALS

Capacities to 70 Tons
Booms to 140 ft. and 30 ft. jibs
Special rates on long rentals

Exeter 2-6125 37-11 Vernon Blvd.
Long Island City 1, New York

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names — **Additional cards on following pages**

NEW ENGLAND

Goodkind & O'Dea

Consulting Engineers
Design and Supervision
Foundations, Structures, Highways
1214 Dixwell Ave. Hamden, Conn.
610 Bloomfield Ave., Bloomfield, N. J.
325 Spring Street, New York 7, N. Y.
108 W. Lake Street, Chicago 1, Ill.

John Clarkeson

Consulting Engineer
Civil Engineers—Consulting Services
Highways, Airports, Bridges
Surveys, Waterfront Facilities
Room 203, Del & Hudson RR Bldg.
Albany, N. Y.

Fay, Spofford & Thorndike, Inc.

Engineers

Airports, Bridges, Express Highways
Water Supply, Sewerage and Drainage
Port and Terminal Works
Industrial Bldgs.
Incinerators and Power Plants

Designs Investigations
Supervision of Construction

11 Beacon Street
Boston 8, Massachusetts

Jackson & Moreland, Inc.
Jackson & Moreland Int'l., Inc.

Engineers and Consultants

Electrical—Mechanical—Structural

Design and Supervision of Construction
for
Utility, Industrial and Atomic Projects

Surveys—Appraisals—Reports

Machine Design-Technical Publications
Boston Washington New York

Chas. T. Main, Inc.

Engineers
Design and Supervision of Construction for Industrial Plants—Electrical, Steam and Hydraulic Engineering—Investigations, Reports, and Appraisals.
Boston, Mass. Charlotte, N. C.

Metcalf & Eddy

ENGINEERS
Investigations Reports Design
Supervision of Construction
and Operation
Management Valuation Laboratory
1300 Statler Building, Boston 16

Moore Survey & Mapping Corp.

Engineers-Photogrammetrists-Surveyors
Geodetic Control—Construction Layout
Aerial Topographic Surveys—Tax Maps
Hydrographic Surveys—Photogrammetry
29 Grafton Circle—Shrewsbury, Mass.

C. W. Riva Co., *Engineers*

Edgar P. Snow John F. Westman
Highways, Bridges, Tunnels, Airports, Foundations, Sewerage, Water Supply
511 Westminster St., Providence 3, R.I.
Great Neck, N. Y., No. Attleboro, Mass.

MIDDLE ATLANTIC

Airport Fueling Systems, Inc.

Specialists in Liquid Handling Systems
1925 K Street, N.W.
Washington 6, D. C.

Airways Engineering Corp.

Airports, highways, dams, fuel storage, pipe lines, aerial topographic mapping.
1212 - 18th St., N.W.,
Washington 6, D. C.
Phone: REpublic 7-8131

Ewin Engineering Corporation

Designers of Port Facilities, Foundations, Industrial Plants, Bridges, Highways, Sewage Disposal and Municipal Projects.

5104 MacArthur Blvd. N.W.
Washington, D. C.

DuPont Plaza Center, Miami 32, Fla.
150 Savannah St. Mobile, Ala.

Penniman & Brown, Inc.

Engineering Division
Soils Engineering—Test Borings Load Testing—Asphalt & Concrete Design—Field and Plant Control Steel Inspection—Mobile X-Ray
6252 Falls Rd. Baltimore 9, Md.
VAlley 5-4131

Whitman, Requardt & Associates

Engineers—Consultants
Civil—Sanitary—Structural
Mechanical—Electrical
Reports, Plans, Supervision, Appraisals
1304 St. Paul St., Baltimore 2, Md.

Maddox and Hopkins

Engineers and Surveyors
Plane and Geodetic Surveys
Topographic Maps — Photogrammetry
Highways, Utilities, Structures
8506 Dixon Ave., Silver Spring, Md.

Greer Engineering Associates

Soils Engineers
Site Investigations; Foundation Analyses for Buildings, Bridges, Airports, Highways, Earth Dams, Pavements; Field Inspection; Laboratory and Field Testing for all types of Earth work.
98 Greenwood Avenue Montclair, N. J.

Louis Berger & Associates

Consulting Engineers
Studies, Design and Supervision
Highways—Structures
Airfields—Foundations
177 Oakwood Avenue Orange, N. J.
2nd & Locust Streets Harrisburg, Pa.
200 S. Main St. Salt Lake City, Utah
40 rue du Rhone Geneva, Switzerland

Joseph S. Ward

Consulting Soil and Foundation Engineer
Site Investigation, Boring Supervision, Laboratory Soil Testing, Foundation and Pavement Analysis and Design, Construction Supervision, Engineering Reports and Consultation
91 Roseland Avenue Caldwell, N. J.

Edwards and Kelcey

Engineers and Consultants
Highways—Structures—Airports
Traffic—Parking—Soils
Ports—Parks—Sewerage
3 William St., Newark 2, New Jersey
Boston New York
Salt Lake City Minneapolis

Porter, Urquhart, McCreary & O'Brien

O. J. Porter & Co.
CONSULTING ENGINEERS
Airports — Highways — Expressways — Buildings — Bridges — Dams — Harbors — Foundations — Stabilization — Pavements
Reports, Designs & Supervision
415 Frelinghuysen Ave., Newark 5, N.J.
4201 Sunset Blvd. Los Angeles 29, Cal.
1421 - 47th Avenue Sacramento 22 Cal.
1140 Howard St. San Francisco 3, Cal.
421 Minor Ave. N. Seattle 9, Wash.

B. K. Hough

Consulting Engineer
Soils & Foundation Engineering
Site investigations, soil testing, design analysis for earthworks, foundations and pavements, field inspection, engineering reports, consultation.
121 E. Seneca St. Ithaca, New York

M. C. Tomasetti

Consulting Engineers—Surveyors
Designs, Construction Supervision
Highways—Airfields—Structures
Soils—Foundations—Pavements—Drainage
Materials Investigations
Site Designs, Subdivisions, Surveys
Greenwich, Conn., New Rochelle, N. Y.

Ammann & Whitney

Consulting Engineers

Design and Supervision of Construction of Bridges, Highways, Expressways, Buildings, Special Structures, Airports and Airport Facilities

111 Eighth Avenue, New York 11, N.Y.

Milwaukee - Washington - Philadelphia
Paris - Athens - Tehran

Blauvelt Engineering Co.

CONSULTING ENGINEERS

Highways,
Bridges,
Reports

468 Fourth Avenue
New York 16, N. Y.

Clinton Bogert Engineers

Consultants

Clinton L. Bogert	Ivan L. Bogert
Donald M. Ditmars	Robert A. Lincoln
Charles A. Manganaro	William Martin
Water & Sewage Works	Incinerators
Drainage	Flood Control
Highways and Bridges	Airfields

145 E. 32nd St., New York 16, N. Y.

Bowe, Albertson & Associates

Engineers
Water and Sewage Works—Industrial Wastes—Refuse Disposal—Valuations—Laboratory Service
75 West St. 1000 Farmington Ave.
New York 6, N.Y. W. Hartford 7, Conn.

Buck, Seifert and Jost

Consulting Engineers
Water Supply — Sewerage — Hydraulic Developments—Reports and Valuations, Chemical and Biological Laboratories.
New York City, 112 E. 19th St.

Gibbs & Hill, Inc.

Consulting Engineers
Water, Sewage & Industrial Waste Treatment Works—Roads, Bridges & Railroads—Conventional & Nuclear Power Generation — Electric Transmission & Distribution Systems—Industrial & Communication Facilities.
Los Angeles NEW YORK Tampa

ALWAYS READY

Yes, these consultants are always ready to help you with any problem concerning engineered construction. Call on them with the assurance that you will be receiving the finest of professional advice.

Ebasco Services Incorporated

ENGINEERS
CONSTRUCTORS
BUSINESS CONSULTANTS
Design and Construction
Financial and Operating Consultation
Investigations and Reports
Consulting Engineering
Appraisal
Two Rector Street New York 6, N. Y.
209 S. LaSalle Street Chic. 4, Ill.
1416 Commerce Bldg. Dallas 1, Texas
611 Equitable Bldg. Portland 4, Ore.
120 Montgomery Street
San Francisco 4, Cal.
1625 Eye Street, N.W. Wash. 4, D. C.

Hardesty & Hanover

Consulting Engineers

Bridges
Fixed and Movable
Highways
Expressways, Thruways
Special Structures
Design, Supervision,
Inspection, Valuation

101 Park Avenue New York 17

Frederic R. Harris, Inc.

CONSULTING ENGINEERS

Reports • Feasibility Studies • Evaluations • Designs • Port Development Foundations • Highways and Bridges Shipyards • Marine Structures • Floating Dry Docks • Graving Docks • Bulkheads • Piers • Wharves • Power Plants • Industrial Buildings

27 William Street, New York 5, N. Y.

Hazen and Sawyer

Engineers
Richard Hazen Alfred W. Sawyer
H. E. Hudson, Jr.
Water and Sewage Works
Industrial Waste Disposal
Drainage and Flood Control
360 Lexington Ave., New York 17, N.Y.

Howard, Needles, Tammen & Bergendoff

Consulting Engineers
Bridges, Structures, Foundations,
Express Highways
Administrative Services
Kansas City - Cleveland - New York

King & Gavaris

CONSULTING ENGINEERS

Bridges, Highways, Tunnels
Waterfront Structures, Reports
Investigations, Foundations
Design & Supervision of Construction

425 Lexington Ave., New York 17, N.Y.

Litchfield Whiting Bowne & Assoc.

Engineers—Architects
Sewage, Water, Bridges, Airports, Flood Control, Electrification, Hospitals, Schools, City Planning, Abbatoirs, Highways, Air Conditioning, Industrial Buildings, Military.
292 Madison Avenue, N. Y. 17, N. Y.
Rome Tehran Bangkok

Modern Engineering Corporation

Design—Consulting
154 Nassau St., New York, N. Y.

QUICK solutions to your technical problems are available through these consultants. Think first of the Professional Services Section of your publication when considering calling in an expert.

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names — **Additional cards on preceding and following pages**

Moran, Proctor Mueser & Rutledge

Consulting Engineers

Foundations for Buildings, Bridges and Dams; Tunnels, Bulkheads, Marine Structures; Soil Studies and Tests; Reports, design and supervision.

415 Madison Ave., New York 17, N.Y.
Eldorado 5-4800

Parsons, Brinckerhoff, Quade & Douglas

ENGINEERS

Bridges, Highways, Tunnels, Airports, Subways, Harbor Works, Dams, Canals, Traffic Parking and Transportation Reports, Power, Industrial Buildings, Housing, Sewerage and Water Supply.

165 Broadway New York 6, N. Y.

E. Lionel Pavlo

Consulting Engineer

Design, Supervision, Reports
Bridges, Highways, Expressways
Marine Structures, Public Works
Industrial Construction, Airports

642 Fifth Ave. New York 19, N. Y.

Malcolm Pirnie Engineers

Malcolm Pirnie Ernest W. Whitlock
Robert D. Mitchell Carl A. Arenander
Malcolm Pirnie, Jr.

MUNICIPAL & INDUSTRIAL
Water Supply - Water Treatment
Sewage and Waste Treatment
Drainage - Sewerage - Refuse Disposal

25 West 43rd St., New York 36, N. Y.

The Pitometer Associates

Engineers

Water Waste Surveys
Trunk Main Surveys
Water Distribution Studies
Water Measurements & Special
Hydraulic Investigations
New York, 50 Church St.

Alexander Potter Associates

Consulting Engineers

Water Works, Sewerage, Industrial Waste, Hydraulic Works, Reports, Designs, Appraisals.

50 Church St., New York, N. Y.

Clyde Potts Assoc.

Weston Gavett - Stanley N. Williams
Consulting Sanitary Engineers
Sewerage and Sewage Disposal
Water Works and Water Supply
Valuations and Appraisals

203 Park Ave., Plainfield, New Jersey

Praeger-Kavanagh

Engineers

126 East 38th St., New York 16, N. Y.

Severud-Elstad-Krueger-Associates

Consulting Engineers
Structural Design - Supervision
Reports - Buildings - Airports
Special Structures

415 Lexington Ave., New York 17, N.Y.

Seelye Stevenson Value & Knecht

Consulting Engineers

Richard E. Dougherty, Consultant

Airports, Highways, Bridges, Dams, Water Supply, Sanitation, Railroads, Piers, Industrial Plants, Reinforced Concrete, Steel, Industrial Waste Disposal, Foundations, Soil Studies, Real Estate Development
Civil — Mechanical — Electrical

101 Park Avenue New York 17, N. Y.

Singstad & Baillie

Consulting Engineers

Ole Singstad David G. Baille, Jr.
Tunnels, Subways, Highways
Foundations, Parking Garages

24 State St. New York 4, N. Y.

Frederick Snare Corporation

Engineers—Contractors

Harbor Works, Bridges, Power Plants, Dams, Docks and Terminals.

Difficult and Unusual Foundations A Specialty.

233 Broadway, New York City 7

Havana, Cuba Lima, Peru
Bogota, Columbia, Caracas, Venezuela

Steinman, Boynton, Gronquist & London

Consulting Engineers

HIGHWAYS - BRIDGES - STRUCTURES

117 Liberty St., New York 6, N. Y.

Tippetts-Abbett-McCarthy-Stratton

Engineers and Architects

Ports, Harbors, Flood Control, Power Dams, Bridges, Tunnels, Highways, Railroads, Subways, Airports, Traffic, Foundations, Water Supply, Sewerage, Reports, Design, Supervision, Consultation.

375 Park Avenue, New York 22, N. Y.

Lawrence S. Waterbury

Consulting Engineer

Bowling Green 9-9298
26 Broadway New York 4

Keis & Holroyd

Consulting Engineers

Formerly Solomon & Keis
Since 1906
Water Supply, Sewage Disposal, Garbage & Refuse Incineration, Industrial buildings.

Troy, N. Y.

Royal Contracting Corporation

Mud-Jacking, Drilling & Grouting Specialists

Box 141, Bridgeport, Pa.
(Montgomery Co.)
Ph. BRoadway-2-5891

Capitol Engineering Corporation

Engineers—Constructors—Management

Bridges Dams
Planning Airports
Sewage Systems Water Works
Design and Surveys Roads & Streets
Executive Offices, Dillsburg, Penna.

Gannett Fleming Corddry & Carpenter, Inc.

ENGINEERS

Dams, Water Works, Sewage, Industrial Wastes & Garbage Disposal, Highways, Bridges & Airports
Traffic & Parking — Appraisals, Investigations & Reports,

Harrisburg, Penna.

Branch Offices
Pittsburgh, Pa. Philadelphia, Pa.
Daytona Beach, Fla.

Grof & Myers

Consulting Engineers

Highways — Bridges — Airports
Surveys — Reports — Plans
Construction Supervision

1824 North 4th St. Harrisburg, Pa.

Robert W. Lowry, Inc.

Consulting Engineers

Investigations, Reports, Supervision, Airports, Highways, Expressways, Bridges, Structures, Prestressed Design, Strengthening, Soil Engineering, Sewerage & Water Systems,
Principal Offices
227 Pine Street, Harrisburg, Penna.

Modjeski and Masters

Consulting Engineers

Bridges and other Structures
Foundations
Highways and Expressways

900 North Sixth St. Harrisburg, Pa.
Philadelphia - Miami - New Orleans

Albright & Friel Inc.

Consulting Engineers

Water, Sewage, Industrial Wastes and Incineration Problems, City Planning Highways, Bridges and Airports, Dams, Flood Control, Industrial Buildings, Investigations, Reports, Appraisals and Rates

3 Penn Center Plaza Phila. 2, Pa.

Lawrence T. Beck and Associates

ENGINEERS AND CONSULTANTS

Philadelphia New York Washington

Fridy, Gauker, Truscott & Fridy, Inc.

Architects & Engineers

Water, Sewer, Waste Disposal, Roads, Airports, Power & Lighting, Petroleum Facilities, Hospitals, Schools, Public & Industrial Buildings, Reports, Plans, Supervision, Appraisals.

1321 Arch St. Philadelphia 7, Pa.

Harris-Dechant Associates

Consulting Engineers

Water Supply, Dams, Stream Improvement, Flood Control, Port & Harbor Development; Sanitary & Industrial Wastes; Hydro & Steam Power; Highway Engineering & Design.
Surveys—Reports—Economics

123 S. Broad St., Philadelphia 9, Pa.

Yule, Sticklen, Jordan & McNee

ENGINEERS

Bridges, Highways, Airports
Design, Investigations, Reports
Supervision of Construction
Civil, Structural Mechanical & Electrical

Cedar Cliff Drive
Camp Hill, Pa.

1225 Vine Street
Philadelphia 7, Pa.

5564 North High Street
Columbus, Ohio

Justin & Courtney

Consulting Engineers

Joel B. Justin - Neville C. Courtney
Dams and Power Problems, Hydroelectric, River Basin Developments, Water Supply, Foundations.

121 South Broad Street
Philadelphia 7, Pa.

Hunting, Larsen & Dunnells,

Engineers

Industrial Plants — Warehouses, Offices and Commercial Buildings, Steel and Reinforced Concrete. Design and Supervision, Reports.

1150 Century Bldg., Pittsburgh, Pa.

Morris Knowles Inc.

Engineers

Water Supply and Purification Sewerage and Sewage Disposal, Valuations, Laboratory, City Planning.

Pittsburgh, Pa.

Peter F. Loftus Corporation

Design and Consulting Engineers

Electrical • Mechanical • Structural
Civil • Nuclear • Architectural
First National Building
Pittsburgh 22, Pennsylvania

Pennsylvania Drilling Company

Subsurface Explorations, Grouting, Industrial Water Supply, Mineral Prospecting.
Large Diameter Drilled Shafts, Reports

1205 Chartiers Ave. Pittsburgh 20, Pa.

Michael Baker, Jr., Inc.

Consulting Engineers, Civil Engineers, Planners & Surveyors; Airports & Highway Design; Water Works & Sewerage Design & Operation; Aerial Topo Maps; Surveys; Reports & Investigations; Irrigation. Home Off.—Rochester, Pa. Br. Off.: Jackson Miss.; Harrisburg, Pa.; College Park, Md.

Sprague & Henwood, Inc.

Drilling Services

Foundation Investigations, Soil Testing & Test Borings, Grout Hole Drilling & Pressure Grouting, Diamond Core Drilling

Main Office
221 W. Olive Street, Scranton, Pa.

Branches:
1009 Western Savings Fund Bldg., Philadelphia, Pa.
11 W. 42nd St., New York, New York
345 Mt. Lebanon Blvd., Pittsburgh 34, Pa.
Box 1446—Grand Junction, Colorado
Atlanta, Ga.
Buchans, Newfoundland

Frank D. McEnteer's Associates, Inc.

Consulting Engineers

Bridges, Highways, Industrial Plants
Design, Investigations, Surveys

Terminal Building, Clarksburg, W. Va.

SOUTH

Harry Hendon & Associates, Inc.

Engineers

Civil Engineers—Public Utilities
Investigations—Designs
Supervision of Construction

P. O. Box 2221 925 Sligh Blvd.
Birmingham 1, Ala. Orlando, Florida

Palmer and Baker Engineers, Inc.

Consulting Engineers - Architects

Surveys-Reports-Design-Supervision
Consultation

Transportation and Traffic Problems
Tunnels-Bridges-Highways-Airports
Industrial Buildings
Waterfront and Harbor Structures
Graving and Floating Dry Docks
Complete Soils, Materials and Chemical Laboratories

Mobile, Ala. New Orleans, La.
Washington, D. C.

REMEMBER!!

You can depend on these consultants for a fast accurate solution to your problems. Consult them when necessary.

Professional Assistance

in solving your most difficult problems is offered by consultants whose cards appear in this section.

CHECK

this section whenever you need professional advice.

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names — Additional cards on preceding and following pages

Brown Engineering Company, Inc.

Architects—Engineers
Civil—Mechanical—Electrical—Industrial

Highway Design, Structural Design
Water Supply, Airports
Sewage Disposal, Industrial Plants
Land Development, Bridges
Railroads, Reports
Commercial & Industrial Buildings

P.O. Drawer 917, Huntsville, Alabama

Rader and Associates

Engineers - Architects
Sewage Disposal, Water Works, Ports, Airports, Bridges, Highways, Office and Commercial Buildings, Industrial Plants, Reports, Investigations, Consultations, Aerial Photography, Photogrammetry.
First Natl. Bank Bldg., Miami 32, Fla.

Cunningham Core Drilling and Grouting Corp.

Soil Sampling & Testing—Core Borings for Highways & Heavy Structures—Heavy Rotary Drilling—Large Earth Auger Drilling Belled Caissons & Mineral Testing—Foundation Treatment & Pressure Grouting
P. O. Box 513 Salem, Virginia

J. Stephen Watkins

Consulting Engineers
Highways—Bridges—Sewerage
Water Supply—Industrial Plants

446 E. High St., Lexington, Kentucky
5402 Preston Highway, Louisville, Ky.
107 Hale St., Charleston, W. Va.

Eustis Engineering Company

FOUNDATION AND SOIL
MECHANICS INVESTIGATIONS

Soil Borings *Laboratory Test*
Foundation Analyses *Reports*

3635 Airline Highway
Metairie, Louisiana

Schmidt Engineering Co. Inc.

Consulting Engineer
Investigations, Reports, Designs, Supervision Heavy Construction—Dams and Hydroelectric Projects—Foundation Explorations and Treatment—Water and Sewerage Works—Bridges & Highways
Emerson Building Chattanooga, Tenn.

ETCO Engineers and Associates

Foundation Consultants

Test Borings Laboratory Tests
Recommendations, Design and Supervision

2116 Canada Dry St., Houston 23, Tex.
727 Main St. Baton Rouge, La.
427 Carondelet St., New Orleans 12, La.

Associated Engineers, Inc.

Industrial Design & Construction
Process Piping
Mechanical, Electrical, Structural and Concrete

Huntington, W. Va.

Mott Core Drilling Company

Core Borings for Buildings, Bridges Foundation Soil Tests, Highways Pressure Grouting, Dams, Mine Shafts Mineral Prospecting

826-846 Eighth Ave, Huntington, W. Va.

The Consulting Engineer

By reason of special training, wide experience and tested ability, coupled with professional integrity, the consulting engineer brings to his client detached engineering and economic advice that rises above local limitations and encompasses the availability of all modern developments in the fields where he practices as an expert.

MIDDLE WEST

Alvord, Burdick & Howson

CONSULTING ENGINEERS

Water Works — Sewerage
Water Purification — Sewage Treatment
Flood Relief — Power Generation
Drainage — Appraisals

20 North Wacker Drive, Chicago

Ralph H. Burke, Inc.

CONSULTING ENGINEERS
Complete Architectural and Engineering Services
Plans, Supervision, and Reports

Expressways - Grade Separations
Traffic Studies - Parking Structures
Underground Garages - Shore Protection
Parks - Field Houses - Municipal Works
Airports and Air Terminal Buildings

20 North Wacker Drive, Chicago 6, Ill.

Consoer, Townsend & Associates

Consulting Engineers

Sewage treatment, sewers, storm drainage, flood control—Water supply and treatment—Highway and bridges—Airports—Urban renewal—Electric and gas transmission lines—Rate studies, surveys and valuations—Industrial and institutional buildings.

360 East Grand Ave. Chicago 11, Ill.

De Leuw, Cather & Company

CONSULTING ENGINEERS

Public Transit — Subways
Traffic & Parking — Railroad Facilities
Expressways — Industrial Plants
Grade Separations — Municipal Works
Urban Renewal — Port Development

150 North Wacker Drive, Chicago 6
San Francisco Toronto Boston

Erik Floor & Associates, Inc.

Consulting and Design Engineers
Hydroelectric Projects — Dams — Flood Control—Hydraulic Structures—Irrigation — Transmission Lines — Investigations—Reports—Designs
139 N. Clark St. Chicago 2, Ill.

Harza Engineering Co.

Consulting Engineers

Calvin V. Davis E. Montford Fuelk
Richard D. Harza

Hydroelectric Plants & Dams
Transmission Lines
Flood Control, Irrigation
River Basin Development

400 West Madison Street Chicago 6

REMEMBER!

You can depend on these consultants for a fast accurate solution to your problems. Consult them when necessary.

Greeley and Hansen

Engineers
Water Supply, Water Purification
Sewerage, Sewage Treatment
Flood Control, Drainage, Refuse Disposal
14 E. Jackson Boulevard
Chicago 4, Illinois

Hazelet & Erdal

CONSULTING ENGINEERS
Fixed & Movable Bridges, Expressways, Industrial Plants, Airports, Dams.
Monadnock Block, Chicago 4, Ill.
Dixie Terminal Bldg., Cincinnati 2, O.
Commerce Bldg., Louisville 2, Ky.
Oding Bldg., Lansing 33, Mich.

Pioneer Service & Engineering Co.

Consulting and Design Engineers
Operations - - - Purchasing
Steam - - Hydraulic - Gas
Public Utilities - - Industrials

231 So. La Salle St. Chicago 4

Sargent & Lundy

ENGINEERS
Steam and Electric Plants
Utilities—Industrials
Studies—Reports—Design
Supervision
Chicago

Suhr, Peterson, Peterson & Suhr

Consulting Engineers
REPORTS—PLANS—SUPERVISION
Sewerage, Water Supply, Flood Control & Drainage, Airports, Roads, Surveys
Fixed & Movable Bridges
130 N. Wells St., Chicago 6, Ill.

Chas. W. Cole & Son

Engineers and Architects
3600 E. Jefferson Blvd.
South Bend, Indiana
2112 W. Jefferson St.
Joliet, Illinois

The Hinchman Corporation

Consulting Engineers
"WORLD-WIDE ACTIVITIES"
Survey • Design • Supervision
Specializing In
Corrosion Control•F.C.C. Certification Tests
Electromagnetic Interference Studies
Francis Palms Bldg., Detroit, Michigan

The H. C. Nutting Company

Testing Engineers—Inspection Service
Foundation Investigation—Test Borings
Soil Mechanics—Sewage Flows
Construction Control—Concrete
Water Waste Survey

4120 Airport Road Cincinnati 26, O.

The Austin Company

Design and Construction
Manufacturing and Process Plants
Newspaper and Broadcasting Bldgs.
Power Plants—Industrial & Institutional
Industrial Office Buildings and Laboratories
Merchandising Bldgs. & Facilities
Plant Location Surveys

New York CLEVELAND Los Angeles
Chicago Houston Oakland
Detroit Seattle

The Osborn Engineering Co.

DESIGNING-CONSULTING

Industrial Plants — Office Buildings
Stadiums — Grand Stands — Field Houses
Bridges — Garages — Laboratories

7016 Euclid Ave. Cleveland 3, Ohio

Havens and Emerson

A. A. Burger, H. H. Moseley, J. W. Avery, F. S. Palocsay, E. S. Ordway, A. M. Mock, G. H. Abplanalp, S. H. Sutton
Frank C. Tolles, Consultant
Water, Sewerage, Garbage, Industrial Wastes, Valuation—Laboratories

Leader Bldg. Cleveland 14 — Woolworth Bldg. New York 7

Photronix, Inc.

offering an integrated process of
AERIAL PHOTOGRAMMETRY AND ELECTRONIC COMPUTATION
For Engineers, By Engineers

790 King Ave. Columbus 12, Ohio

Jones, Henry & Williams

Consulting Sanitary Engineers
Water works, Sewerage & Treatment
Waste Disposal
Security Building Toledo 4, Ohio

Toledo Testing Laboratory

Engineers—Chemists

Concrete—Soils—Asphalt
Inspection — Research
Tests — Development
Foundation Investigation
Borings—Diamond Drilling
Load Tests
Soils Mechanics Laboratory

1810 North 12th St. Toledo 2, Ohio

WEST OF MISSISSIPPI

Engineering Consultants, Inc. ECI

Multipurpose Hydroelectric Projects
Dams, Canals, Tunnels, Structures
Power Plants, Transmission Systems
Municipal Engineering, Irrigation
Investigations, Reports, Supervision

1901 S. Navajo St., Denver 23, Colo.

Heron Engineering Co.

Consulting Engineers
For all types of Aerial Tramways, Cableways, and Suspended Structures

2000 South Acoma St.
Denver 23, Colorado

Stanley Engineering Company

Consulting Engineers

Hershey Building 208 S. LaSalle St.
Muscatine Ia. Chicago 4, Ill.

Black & Veatch

Consulting Engineers

Water - Electricity - Sewage - Industry Reports, Design, Supervision of Construction, Investigations, Valuation and Rates.

1500 Meadow Lake Parkway
Kansas City 14, Missouri

Burns & McDonnell

Engineers—Architects—Consultants

4600 E. 63rd St. Trafficway
Kansas City 41, Missouri

Quick

solutions to your technical problems are available through these consultants. Think first of the Professional Services Section of your publication when considering calling in an expert.

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names

Additional cards on preceding pages

Russell and Axon

Consulting Engineers

Civil — Sanitary — Structural
Industrial — Electrical
Rate Investigations

408 Olive St. St. Louis 2, Mo.
Municipal Airport, Daytona Beach, Fla.

Sverdrup & Parcel Engineering Co.

Engineers—Architects

Bridges, Structures and Reports,
Industrial and Power Plant
Engineering

915 Olive St., St. Louis 1, Mo.
417 Montgomery St., San Francisco, Calif.

Benham Engineering Company

Established in 1909

Design and Consulting Engineers

215 N E 23rd Street
Oklahoma City 5, Oklahoma

Spencer J. Buchanan and Associates, Inc.

Consulting Engineers

Soil Mechanics and Foundation Engineering. Civil Engineering Services. Reports, Design and Field Supervision.
310 Variseo Building, Bryan, Texas
TAylor 2-3767

Soil Mechanics Incorporated

Foundation Exploration and Testing Services

Site Investigations, Soil Borings, Field and Lab Testing, Load Tests, Reports

310 Variseo Building, Bryan, Texas
TAylor 2-3767

Lockwood, Andrews & Newnam

Consulting Engineers

Navigation Facilities — Public Works
Airports — Earthworks — Roads,
Structural, Mechanical — Electrical
Reports — Design — Supervision
Surveys — Valuations
Corpus Christi—Houston—Victoria, Texas.

FAR WEST

International Engineering Company, Inc.

ENGINEERS

Investigations - Reports - Design
Procurement - Field Engineering
Domestic and Foreign
74 New Montgomery St.
San Francisco 5, California

THIS SECTION
is available to consulting engineers to contact prospective clients every week or every other week.

Jacobs Associates

Consulting Construction Engineers

TUNNELS—DAMS
EARTHMOVING—FOUNDATIONS
Methods, Cost Estimates, Plant Design, Management, Surveys, Engineering Geology, Materials Handling

503 Market St., San Francisco 5, Calif.

FOREIGN

The Foundation Engineering Company of Puerto Rico

Consulting Engineers

Foundation and Soil Mechanics Investigations, Laboratory analyses, reports and recommendations, design of structures, supervision.
P.O. Box 821, San Juan, Puerto Rico

Puerto Rico Testing Services, Inc.

Soils and Foundation Consultants
Borings-Laboratory Tests-Supervision
Concrete—Materials—Designs—Reports
P.O. Box 588
Roosevelt (San Juan) Puerto Rico

ALWAYS READY

Yes, these consultants are always ready to help you with any problem concerning engineered construction. Call on them with the assurance that you will be receiving the finest professional service.

INSPECTION & TEST

Robert W. Hunt Company

Inspection and Testing of Engineering Materials & Equipment

General Offices and Laboratories

810 South Clinton Street, Chicago 7,
All Principal Cities

Johnson Soils Engineering Laboratory

Foundation Design - Highway & Airport Pavements - Construction Control - Load Tests - Shear & Consolidation Tests - MOBILE LABORATORIES
193 West Shore Ave., Bogata, N. J.
Bogata-Hubbard 7-4408

Pittsburgh Testing Laboratory

A national service with complete laboratory and inspection facilities.
Laboratories in principal cities.
Main Office: 1330 Locust St.,
Pittsburgh, Pa.

Law Engineering Testing Company

Soils Engineers & Consultants

Soil Testing — Soil Boring — Rock Drilling—Load Testing—Field Control —Engineering Studies—Chemical Analysis—Physical Testing
Box 1558 Atlanta 1 Ga.
Serving the entire South

AERIAL SURVEYS

Aerial Map Service Co.

Topographic, Planimetric, Photo-Maps for Highways, Mining, Resources, Construction. City Maps, Tax Maps, Photo Geology, Tellurometer Radio Distance Measurements, Triangulation, Electronic Computation.

1016 Madison Ave., Pittsburgh 12, Pa.

American Air Surveys, Inc.

AERIAL TOPOGRAPHIC MAPS &
AERIAL PHOTOS FOR
• Highways • Airports • Power & Pipe Lines • Railroads • Mining • All types construction • Stockpile Inventories
907 Penn Ave. Pittsburgh 22, Pa.
A NATIONWIDE SERVICE

Clyde E. Williams & Assoc., Inc.

Aerial Photos - Enlargements - Topographic Maps

At large and particular scales to suit various engineering needs, e. g. Airports, City Sewer & Water, Power & Pipe lines, Reservoirs, Subdivisions, Highways, Bridges & Inventories.
312 W. Colfax Ave. South Bend, Ind.

GEOLOGISTS

Geologic Associates

ENGINEERING GEOLOGISTS

Studies and Reports
Foundation Investigations
Specialized Drilling and Sampling

Brentwood, Tennessee
Phone (Nashville) VErnon 2-1748

Stone Geological Service, Inc.

Engineering Geology • Ground Water

Hillside Development
Heavy Construction • Pre-Bid Studies
Materials Availability & Workability
• Landslides •

5525 Wilshire Blvd. Los Angeles, Cal.
100 Montgomery St. San Francisco, Cal.

GEOPHYSICISTS

Alpine Geophysical Associates, Inc.

Engineers-Geophysicists-Geologists

Land and Marine Foundation Surveys
Highways-Bridges-Tunnels-Buildings
Earthquake Counselor Service
Ore-prospective Consultants, Custom Instrumentation and Investigations

10 Oak Street Norwood, New Jersey

CHECK
this section whenever you need professional advice.

CONSULT THESE SPECIALISTS . . .

When you need professional assistance in solving difficult problems. Their specialized knowledge and broad experience can prove invaluable in saving both time and money for you.

Engineering News-Record invites other consultants to list the special services they offer on these pages.

Rates for the Professional Services section are:

PER WEEK	13 times	26 times	52 times
¾"—$14.35	$13.35	$12.45
1½"—$23.85	$22.30	$21.00

OFFICIAL PROPOSALS

Continued from page 73

Bids: March 20, 1960

Construction of Port of Um Qasr Near Basrah

REPUBLIC OF IRAQ
IRAQI PORTS ADMINISTRATION

1. Tenders are invited by the Iraqi Ports Administration for the construction of three berths at Um Qasr and Works in conection therewith.
2. The Contract documents and Instructions to Persons Tendering for these Works may be inspected on or after the 21st day of December 1959, at any of the following places:—
   a) The offices of the Ports Administration at Basrah, Iraq.
   b) The offices of the Ministry of Communications, Baghdad, Iraq.
   c) The offices of the Consulting Engineers, Messrs. Coode and Partners, Abbey House, 2/8 Victoria Street, London, S.W.1, England.
   d) The offices of Messrs. Coode, Binnie and Preece, 35/36 Roxborough Apartments, Laurier Avenue W, Ottawa 4, Ontario, Canada.
   e) The Embassies of the Iraqi Republic in London, Bonn, Washington, New Delhi, Brussels and Moscow.
   f) The Consulates of the Iraqi Republic in Bombay, New York, Geneva and Stockholm.
   g) The Legations of the Iraqi Republic in Rome and Vienna.
3. Firms desiring to tender may obtain four copies of the Contract Document and one set of the drawings between the 21st day of December 1959 and the 20th day of February 1960 from either the Director General, Iraqi Ports Administration, Basrah, or the Ministry of Communications, Baghdad, or from the Consulting Engineers, Messrs. Coode and Partners in London, upon payment of ID.50 (Iraqi Dinars Fifty) or £50 (Fifty pounds Sterling) for each set of documents, which will not be returnable.
4. Tenders must be accompanied by a deposit of 7% for the first ID.1,000 of the estimated cost and 5% of the remainder of the estimated cost, to be made at the Central Bank, Baghdad or Basrah. Full detailed conditions as to this deposit may be ascertained from "Instructions to Persons Tendering" attached to the Contract Documents.
5. Tenders for these Works must be submitted to the IRAQI PORTS ADMINISTRATION(BASRAH, and will be received up to noon on the 20th day of March 1960.
6. Particular attention is drawn to Article 22 of the Instructions to Persons Tendering, namely, that tenders will only be accepted from firms of contractors who have previously executed works of a similar nature and magnitude.

DIRECTOR GENERAL,
IRAQI PORTS ADMINISTRATION,
BASRAH.

OFFICIAL PROPOSALS

Bids: January 14, 1960

Feeder Road Program

MINISTRY OF PUBLIC WORKS
REPUBLIC OF EL SALVADOR
BIDS: JANUARY 14, 1960
NOTICE TO CONTRACTORS

The Ministry of Public Works of the Republic of El Salvador advises that on January 14, 1960, bids will be received for the construction of a major portion of the proposed Feeder Road Program of the country. The Specifications, Plans and Contract Documents will be for sale in El Salvador on December 9, 1959.

All Contractors interested in taking part in this bidding are requested to obtain the necessary Documents, Plans and Specifications from the Office of the Proveedor Especifico de Obras Publicas, Edificio Morazan, 8ª C. P., San Salvador, El Salvador, C. A. All requests must be accompanied by a certified check in the amount of One Hundred Sixty Dollars which will not be returned.

MINISTRY OF PUBLIC WORKS
REPUBLIC OF EL SALVADOR,
C. A.

READ THE OFFICIAL PROPOSAL COLUMN OF ENGINEERING NEWS-RECORD THIS WEEK AND EVERY WEEK

ADVERTISERS IN THIS ISSUE

American Vitrified Products Company..... 5
Atlas Copco 38
Aurora Pump Div., of the N. Y. Air Brake.. 70

Bethlehem Steel Co..... 68

Cleveland Trencher Co..... 49
Concrete Reinforcing Steel Institute..... 83

John Deere Industrial Div.....66-67
Dodge Division, Chrysler Corp..... 44
Dorr Oliver, Inc..... 53
Richard Dudgeon, Inc..... 83

Elgood Concrete Forms, Corp..... 58

Gahagan Dredging Corporation..... 40
Georgia-Pacific Corp. 63
The Goodyear Tire & Rubber Co.,
Industrial Products Div..... 1
Griffin Wellpoint Corp..... 14

Industrial Tubular Equipment Company... 40
The Ingalls Iron Works Co..... 37
International Harvester Co.,
Construction Equipment Div.....26-27
Irving Subway Grating Co., Inc.....56-57

The Jaeger Machine Co..... 11
Jenkins Bros. 12
Jones & Laughlin Steel Corp.....42-43

Kern Instruments, Inc..... 57
The Kinnear Mfg. Co..... 83

Lead Industries Assn..... 7
Louisville Cement Co..... 31

Marlow Pumps 35
The Master Builders Company.....3rd Cov.
Maxon Construction Company, Inc..... 41
Mayo Tunnel & Mine Equipment..... 83
McGraw-Hill Book Co., Inc.....59, 65
Moretrench Corporation 83

Northwest Engineering Co..... 3

Pacific Appraisal Company..... 48
Pacific Crane & Rigging Co..... 46
Parsons, Brinckerhoff, Quade & Douglas.. 46
Pittsburgh-Des Moines Steel Company.2nd Cov.
Pittsburgh Plate Glass Co..... 25
The Preload Company, Inc..... 45

Republic Steel Corporation.....54-55
Russell, Burdsall & Ward Bolt & Nut Co... 47

Spencer, White & Prentis, Inc..... 48
John W. Stang Corp..... 58
Stanpat Co. 6
Symons Clamp & Mfg. Co..... 2

Texaco Inc., Asphalt Sales Div.....4th Cov.
E. A. Thompson Co., Inc..... 59
The Timken Roller Bearing Co..... 4

Umeco Optical Division..... 48
Unit Crane and Shovel Corp..... 8-9
U. S. Rubber Co., Mechanical Goods Div... 16

Voss Belting & Specialty Co..... 52

Wagner Electric Corp..... 10

Professional Services 79, 82

CLASSIFIED ADVERTISING

F. J. Eberle, Business Mgr.

Employment Opportunities 74, 75
Notices
Proposals 71-73
Equipment
(Used or Surplus)
(For Rent, Sales Wanted).....76

Kinnear Rolling Doors

Kinnear Steel Rolling Doors are **Registered.** Full details on every door are held in fire-proof vaults. Kinnear Doors *never* become "orphans". Worn or damaged parts are replaced even after **50 years of door service.**

KINNEAR ROLLING DOORS
Saving Ways in Doorways

Write for catalog!
The KINNEAR Manufacturing Co.
1820-40 Fields Ave., Columbus 16, Ohio
1742 Yosemite Ave., San Francisco 24, Calif.

The QUICKEST way to get Reinforced Concrete Designs Revised 1959...
Second Edition! Third Printing!

447 pages

over 75,000 copies in use

This valuable handbook provides Reinforced Concrete Designs worked out to the latest A.C.I. Building Code. Send check or money order today for your 1959 copy.

Prepared by the Committee on Engineering Practice

$6.00 postpaid

10-Day, Money Back Guarantee
NO C.O.D. ORDERS

CONCRETE REINFORCING STEEL INSTITUTE
38 S. Dearborn St. (Div. D), Chicago 3, Illinois

BEFORE YOU START THAT WET JOB
Ask How You Can Save

MORETRENCH WELLPOINT SYSTEM
Guarantees Dry Digging

Send for Catalog
MORETRENCH CORPORATION
World's Oldest, Largest and Most Experienced Predrainage Organization
Main Office & Plant: **Rockaway, N. J.**
Chicago, Ill., Tampa, Fla., Houston, Tex., Hackensack, N. J.

SHIELDS AND SAND HOG EQUIPMENT



Bulletin No. 23 shows installations of Mayo shields, cylindrical air locks, lock doors, medical locks and tunnel cars. Send for your free copy.

MAYO
TUNNEL AND MINE EQUIPMENT
Lancaster, Penna.

DUDGEON HYDRAULIC JACKS

SALES RENTALS
• CAPACITY TO 600 TONS

FOR:
PILE TESTING
•
UNDER-PINNING
•
BRIDGES
•
PIPE PUSHING
•
SOIL TESTING

Write to Dept. R

RICHARD DUDGEON INC.
789 BERGEN ST. • ST 9-4040 • BROOKLYN, N. Y.

Public Works No Panacea

GOVERNOR ROCKEFELLER has asked the New York legislature to strengthen the role for public works construction in a recession (see p. 62). He would create a reservoir of planned projects that could be tapped to stimulate the state's economy. And he would repeal the state law that ties all bond issues to specific projects so that the proceeds of some such issues could be used as freely as necessary "to maintain a constant or increased level of public works activity."

Constructive results can come from implementation of these requests, but only on the assumption that the governor and the legislature do not subscribe to the nonsense that public works can be used to offset declines in the whole economy—or even that they can effect a quick turn-around of declining construction activity itself.

The limited value of public works construction as a depression reliever is plain when one notes that this type of work constitutes only one-third of total construction, private projects making up the rest. And since total construction accounts for less than 15% of the gross national product, public works by itself is only 5%. Thus even if public works were to be doubled, their contribution to business revival could in no way be decisive.

The best that public works can do in a recession is to take up some of the slack caused by a drop in private construction. Even here, experience has shown that this desirable goal is hard to achieve because of the difficulty of scheduling public works so that the projects will be at a stage to make a maximum contribution at the right time.

In short, public works construction is not something that can be turned on and off at will. Nor should it be if it could.

Public works is a basic part of the fabric of a growing economy. It is thus needed at every stage of the business cycle, and probably more rather than less when business is booming, since much of it is complementary to private construction.

What is possibly of even greater significance is that the public plant, like any other, wears out and requires replacement. This fact alone requires a continuing high level of public works construction.

To attempt to defer public works until a recession is imminent would, therefore, constitute gross neglect, slow the economy and perhaps even speed the recession that the projects were planned to soften. In addition to these disadvantages, the administrative and judicial difficulties involved in selecting projects to be postponed and then suddenly deciding which of them to initiate are formidable, to say the least.

A continuous high level of public works activity is what benefits the country most. Obviously such work should not be reduced when a recession looms, and Governor Rockefeller properly emphasizes this by urging procedures that will "maintain a constant or increased level of public works activity." He also is on sound ground in urging more advance planning of public works projects. Bigger reservoirs of designed projects, reasonably ready to go, are badly needed to keep public works construction activity on a more even keel and at a high tempo at all times, regardless of the threat of recessions. If the reservoir is full enough when recession strikes to increase the tempo of public works construction, so much the better.

The crux of the matter is that public works are no panacea for a depression. There can be no quarrel with advanced planning in design and in financing procedures, but the work should be undertaken with the full realization that no amount of public works can lift the whole economy, and that at best such work can offset some of the decline in private construction.

Being overambitious in the use of public works can only result in waste and disappointment. It would be much better to look for ways to stimulate the large segment represented by private construction than to attempt a huge expansion of the smaller public works segment. All too often, too, such expansion discourages the resumption of private work just when it is needed most.

Round Trips to Russia

IT IS GOOD NEWS that a formal agreement has been signed with Russia for exchange visits of U. S. and Soviet construction experts. Each of the exchanges that have taken place previously has had to be preceded by such prolonged bargaining that many groups in both countries, who would benefit from exchange visits, have been discouraged from trying to arrange them. With the principle—now established on a high government level—that the cultural exchange program should include construction, the situation should change for the better.

Reports from Washington indicate that the Russians are most interested in highway construction and in mechanization as applied to all types of construction. A cable from ENR's Moscow Bureau, however, adds tunneling, industrial buildings and cement production as objects of Soviet interest in the U.S. No mention is made of dam construction, but since this is a prime field of interest so far as the U.S. is concerned, our arrangers should insist on its inclusion.

Now that the principle of exchange construction visits has been formalized, no time should be lost in scheduling the round trips. Moreover, what is learned should be widely publicized to the end that construction everywhere will benefit.

As in Los Angeles today . . .

Where there's progress . . . there's POZZOLITH concrete

The men who designed and built these outstanding modern structures specified and used POZZOLITH to assure concrete of superior architectural and structural quality at lowest possible cost.

Over the years—in cities throughout the world—where careful attention is given to concrete performance and economics, the use of POZZOLITH is increasing steadily. Over 180 million cubic yards of POZZOLITH concrete have been placed to date . . . a significant proof-of-performance record.

For *your* job . . . with *your* materials—POZZOLITH concrete is best. Neither plain concrete nor concrete with any other admixture can match the results you'll get with today's POZZOLITH.

On current or future concrete projects, the local Master Builders field man will welcome discussing your requirements. Call him in. He's at your service—backed by the Master Builders research and engineering staff—unexcelled in the field of concrete technology. Write us for full information.

The Master Builders Company, Cleveland, Ohio
Division of American-Marietta Company
The Master Builders Company, Ltd., Toronto, Ontario
Represented in foreign countries by:
Master Builders International, Nassau, Bahamas
Division of American-Marietta, C.A.
Branch Offices in all principal cities.

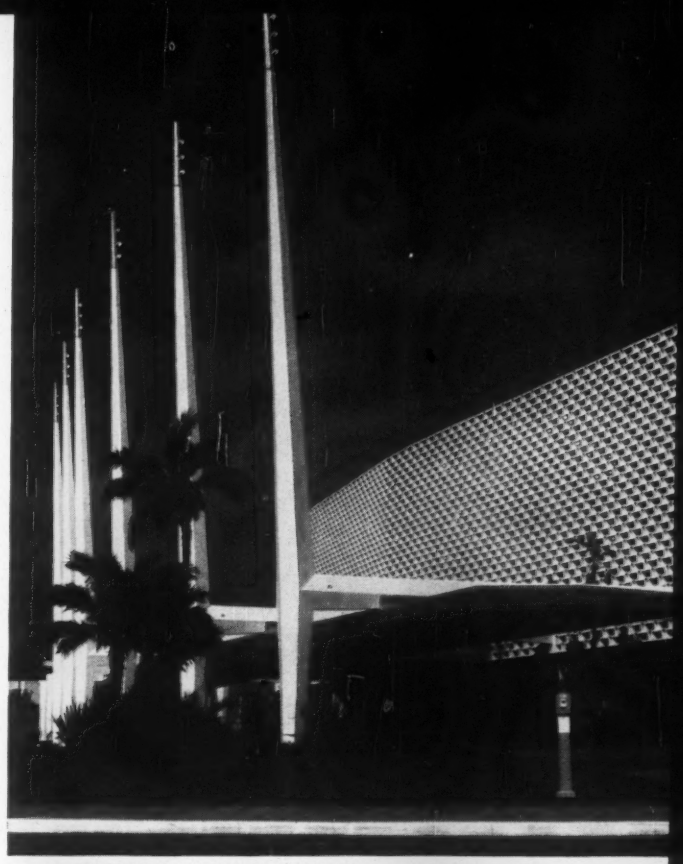

SANTA MONICA CIVIC AUDITORIUM • Architect and Engineer: Welton Becket & Associates • Structural Engineer: Murray Erick Associates • Contractor: C. L. Peck; Millie-Severson, Inc. • POZZOLITH Ready-Mixed Concrete for lightweight concrete panels: Consolidated Rock Products Co. • Concrete Testing and Control: Raymond G. Osborne Laboratories, Inc.

LOS ANGELES COUNTY COURT HOUSE • Architect: J. E. Stanton: Paul R. Williams; Adrian Wilson; Austin, Field & Fry • Engineer: Brandow & Johnston • Contractor: Gust K. Newberg Construction Co. • POZZOLITH Ready-Mixed Concrete: Consolidated Rock Products Co., Inc. • Concrete Testing and Control: Smith-Emery Company.

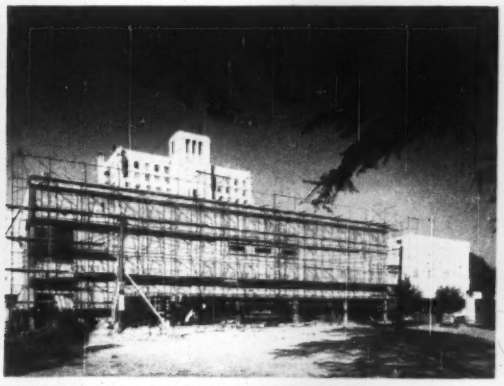

LOS ANGELES COUNTY ART INSTITUTE • Architect: Austin, Field & Fry • Engineer: Wheeler & Gray • Contractor: Tom E. Norcross • POZZOLITH Ready-Mixed Concrete: Livingston Rock & Gravel Co., Inc. • Concrete Testing and Control: Raymond G. Osborne Laboratories, Inc.

LOS ANGELES MEMORIAL SPORTS ARENA • Architect and Engineer: Welton Becket & Associates • Structural Engineer: Brandow & Johnston • Contractor: L. E. Dixon Co. • POZZOLITH Ready-Mixed Concrete: Consolidated Rock Products Co. • Concrete Testing and Control: Raymond G. Osborne Laboratories, Inc.

MASTER BUILDERS® POZZOLITH*

**POZZOLITH is a registered trademark of The Master Builders Co. for its concrete admixture to reduce water and control entrainment of air and rate of hardening.*

Placing first layer of coarse-graded Texaco Asphaltic Concrete foundation on the soil-aggregate subbase.

This Virginia highway needed a heavy-duty pavement

A 4½-mile section of U. S. Route 460 in Prince Edward County is an example of heavy-duty Texaco Asphalt paving as Virginia constructs it. Both the foundation and the wearing surface are of rugged plant-mix Asphalt construction. Coarse-graded Texaco Asphaltic Concrete was used for the 5½-inch foundation and fine-graded Texaco Asphaltic Concrete for the 1½-inch wearing surface. Under this asphalt pavement is a 5-inch soil-aggregate subbase.

Its performance on Virginia's primary highways recommends this heavy-duty type of Texaco asphalt construction for the Interstate Highway System. Not only does it absorb punishing impact year after year, with a minimum of upkeep, but its first cost is substantially lower than that of rigid paving of comparable design. Let Asphalt help give your State extra miles of modern roads for its highway dollars.

Helpful information on heavy-duty Asphalt paving, as well as the various intermediate and low-cost types of Asphalt construction, is supplied in two free Texaco brochures. Ask our nearest office to send you copies. There is no obligation.

Contractor: ADAMS CONSTRUCTION COMPANY, Roanoke, Va.

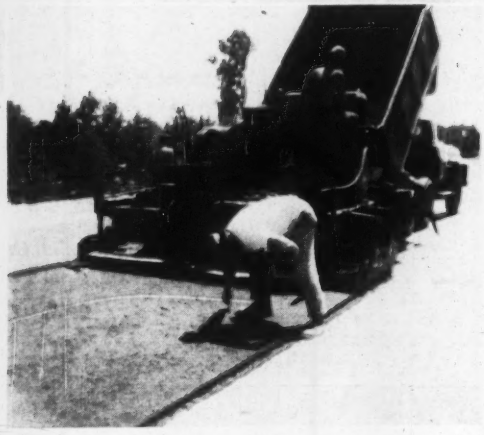

Constructing fine-aggregate Texaco Asphaltic Concrete wearing surface.

Durable, resilient, glare-free Texaco Asphaltic Concrete on 4½-mile section of U. S. Route 460 in Prince Edward County, Va.

TEXACO INC., Asphalt Sales Div., 135 E. 42nd Street, New York 17
Boston 16 Chicago 4 Denver 1 Houston 1 Jacksonville 1
Minneapolis 3 Philadelphia 2 Richmond 25

TEXACO REG. T. M.

TEXACO ASPHALT